

TO-220
SELF-LOCKING
576802†

 Ordering Code: **576802B04000**
 Height: 0.750
 θ : 18.8°C/W @2.5W
 With Solderable Tab for Horiz. Mounting:
576802B03100
591302†

 Ordering Code: **591302B02800**
 Height: 0.790
 θ : 26.8°C/W @2.8W

With Sure-Lock™ Tabs for Vert. Mounting.


574402†, 574102†

 Ordering Code: **574402B03200**
 Height: 0.395
 θ : 23.2°C/W @2.5W

With Solderable Tabs for Horiz. Mounting.

 Ordering Code: **574102B00000**

 Height: 0.750
 θ : 23.2°C/W @2.5W

574502†, 574602†, 574902†

 Ordering Code: **574502B03300**
 Height: 0.750
 θ : 21.2°C/W @2.5W
 With Solderable Tabs for Vert. Mounting.

 Ordering Code: **574602B03300**

 Height: 0.690
 θ : 21.6°C/W @2.5W
 With Solderable Tab for Vert. Mounting.

 Ordering Code: **574902B03300**

 Height: 1.375
 θ : 16.0°C/W @2.5W
 With Solderable Tabs for Vert. Mounting

1. Thermal resistance has been evaluated in natural convection, at the power level which results in a 75°C temperature rise above ambient.

2. Height (in inches) designation is by reference to the part size, oriented to the board in its most common configuration.

† These products have been patented by Aavid Thermal Technologies, Inc.

507102

 Ordering Code: **507102B00000**
 Height: .700
 θ : 15.6°C/W

575102

 Ordering Code: **575102B00000**
 Height: 0.750
 θ : 16.8°C/W @2.5W

579302†

 Ordering Code: **579302B00000**
 Height: 0.750
 θ : 16.8°C/W @2.5W

MANUAL ATTACHMENT
577002, 577102, 577202

 Ordering Code: **577002B00000**
 Height: 0.250
 θ : 32.0°C/W @2.5W
 With Solderable Tab for Vert. Mounting:
577002B04000

 Ordering Code: **577102B00000**

 Height: 0.380
 θ : 25.9°C/W @2.9W
 With Solderable Tab for Vert. Mounting:
577102B04000

 Ordering Code: **577202B00000**

 Height: 0.500
 θ : 24.4°C/W @2.5W
 With Solderable Tab for Vert. Mounting:
577202B04000
575002

 Ordering Code: **575002B00000**
 Height: 1.180
 θ : 13.6°C/W @5.0W

530613, 530614, 530714

 Ordering Code: **530613B00000**
 Height: 0.500
 θ : 16.7°C/W @4.5W

530614†

 Ordering Code: **530614B00000**
 Height: 0.500
 θ : 16.7°C/W @4.5W

530714†

 Ordering Code: **530714B00000**
 Height: 0.500
 θ : 20.3°C/W @3.7W

592502

 Ordering Code: **592502B03400**
 Height: 1.250
 θ : 22.0°C/W @2.5W
 With Solderable Tabs for Vert. Mounting.

593202

 Ordering Code: **593202B03500**
 Height: 2.000
 θ : 10.0°C/W @5.0W
 With Solderable Tabs for Vert. Mounting.

534302, 594302†

 Ordering Code: **534302B03553**
 Height: 2.000
 θ : 10.4°C/W @5.0W
 With Solderable Tabs for Vert. Mounting.

 Ordering Code: **594302B02853**


 Height: 2.000
 θ : 8.8°C/W @8.5W
 With Sure-Lock™ Tabs and Kool-Klip™ #115330 for Vert. Mounting.

593002


 Ordering Code: **593002B03400**
 Height: 1.180
 θ : 13.4°C/W @5.0W
 With Sure-Lock™ Tabs for Vert. Mounting:
593002B02800
534202

 Ordering Code: **534202B03453**
 Height: 1.180
 θ : 13.0°C/W @5.0W
 With Solderable Tabs for Vert. Mounting.


591302

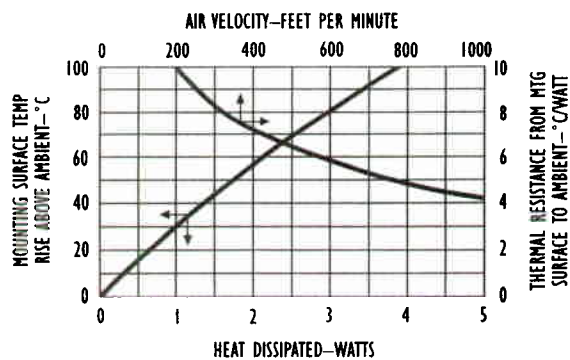


593202

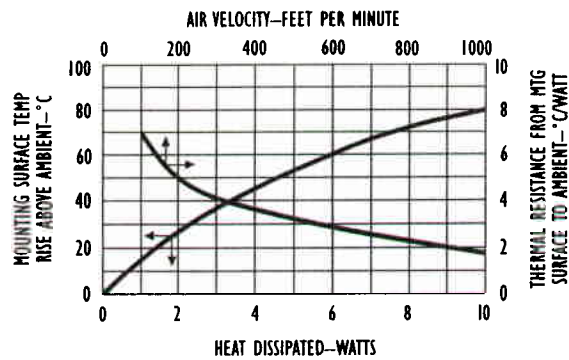

592502

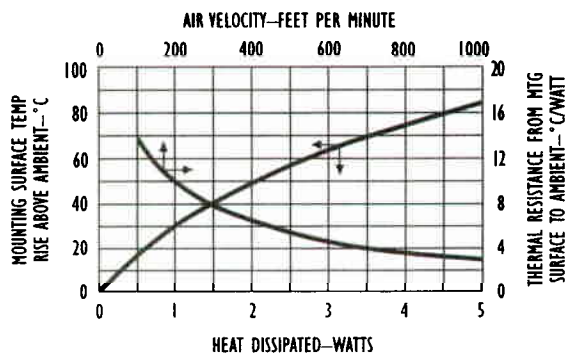

594302

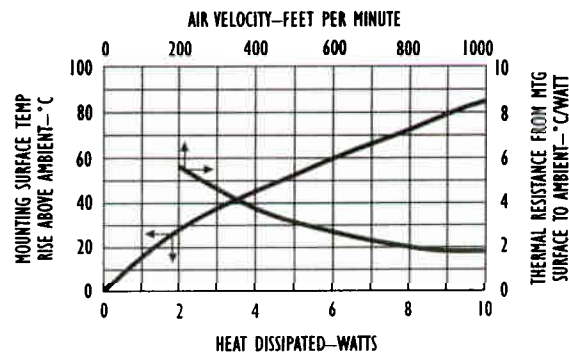

593002

