

**DATA SHEET**

# OLS700: Hermetic Surface-Mount Isolinear Optocoupler

## Features

- Electrical parameters guaranteed over  $-55\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$  ambient temperature range
- 1000 V<sub>dc</sub> electrical isolation
- High reliability and rugged construction
- Matched photodiodes
- Excellent linearity
- Offers 100% high reliability screenings

## Description


The OLS700 optocoupler consists of one LED that is optically coupled to two matched photodiode detectors. Photodiode detectors are used for excellent linearity.

A fixed relationship is maintained between input and output:

- The photodiode on the input side acts as a feedback device that permits an external feedback loop to ensure constant LED light output.
- A similar matching photodiode on the output side is used to drive an output circuit that is electrically isolated from the input.

Each OLS700 is mounted and coupled in a custom hermetic surface-mount Leadless Chip Carrier (LCC) ceramic package, that provides 1000 V<sub>dc</sub> electrical isolation between the input and output.

Device mounting is achieved with reflow soldering or conductive epoxies.

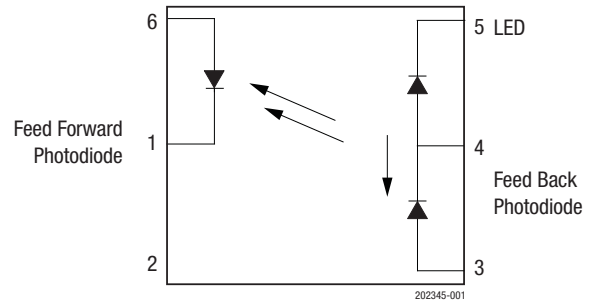

**Figure 1. OLS700 Block Diagram**

Figure 1 shows the OLS700 functional block diagram. Table 1 provides the OLS700 absolute maximum ratings. Table 2 provides the OLS700 electrical specifications. Figure 2 provides the OLS700 package dimensions.

**Table 1. OLS700 Absolute Maximum Ratings<sup>1</sup>**

Parameter	Symbol	Minimum	Maximum	Units
<b><i>Coupled</i></b>				
Input to output isolation voltage	V <sub>DC</sub>	-1000	+1000	V
Storage temperature range	T <sub>STG</sub>	-65	+150	°C
Operating temperature range	T <sub>A</sub>	-55	+125	°C
Mounting temperature range (3 minutes maximum)			+240	°C
Total power dissipation	P <sub>D</sub>		+250	mW
<b><i>Input Diode</i></b>				
Average input current	I <sub>DD</sub>		60	mA
Peak forward current (≤1 ms duration)	I <sub>F</sub>		100	mA
Reverse voltage	V <sub>R</sub>		3	V
Power dissipation	P <sub>D</sub>		100	mW
<b><i>Output Detector</i></b>				
Reverse voltage	V <sub>R</sub>		30	V
Forward voltage	V <sub>F</sub>		0.3	V

<sup>1</sup> Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to the device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

---


**ESD HANDLING:** *Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.*

---

**Table 2. OLS700 Electrical Specifications<sup>1</sup>**  
**(T<sub>A</sub> = 25 °C)**

Parameter	Symbol	Test Condition	Minimum	Typical	Maximum	Units
LED emitter:						
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 10.0 mA		1.3	1.6	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 3 V			10	μA
Photodiode detector:						
Dark current	I <sub>D</sub>	V <sub>R</sub> = 15 V, I <sub>F</sub> = 0 mA		1	25	nA
Open circuit voltage	V <sub>OC</sub>	I <sub>F</sub> = 10 mA		500		mV
Coupled characteristics:						
K1, servo current gain (I <sub>P1</sub> /I <sub>F</sub> )	K1	I <sub>F</sub> = 10.0 mA, V <sub>DET</sub> = -15.0 V	0.0020	0.0030	0.0060	
Servo current	I <sub>P1</sub>	I <sub>F</sub> = 10 mA, V <sub>DET</sub> = -15 V		30		μA
K2, forward current gain (I <sub>P2</sub> /I <sub>F</sub> )	K2	I <sub>F</sub> = 10.0 mA, V <sub>DET</sub> = -15.0 V	0.0020	0.0030	0.0060	
Forward current	I <sub>P2</sub>	I <sub>F</sub> = 10 mA, V <sub>DET</sub> = -15 V		30		μA
K3, transfer gain (K2/K1)	K3	I <sub>F</sub> = 10.0 mA, V <sub>DET</sub> = -15.0 V	0.75	1.0	1.25	
Frequency response (-3 dB)	Bw	I <sub>F</sub> = 10 mA ± 4 mA, R <sub>L</sub> = 50 Ω		200		kHz
Phase response @ 200 kHz	tr	I <sub>F</sub> = 10 mA ± 4 mA, R <sub>L</sub> = 50 Ω		-45		°C
Rise time	t <sub>f</sub>	I <sub>F</sub> = 10 mA ± 4 mA, R <sub>L</sub> = 50 Ω		2		μs
Fall time	C <sub>IO</sub>	I <sub>F</sub> = 10 mA ± 4 mA, R <sub>L</sub> = 50 Ω		2		μs
Input-output capacitance	R <sub>IO</sub>	f = 1 MHz		1.5		pF
Insulation resistance	W <sub>TV</sub>	V <sub>IO</sub> = 500 V <sub>DC</sub>		10		GΩ
Withstand test voltage		R <sub>H</sub> ≤ 50%, L <sub>IO</sub> ≤ 1 μA, 1 s	1000			V <sub>DC</sub>

<sup>1</sup> Performance is guaranteed only under the conditions listed in the above table.

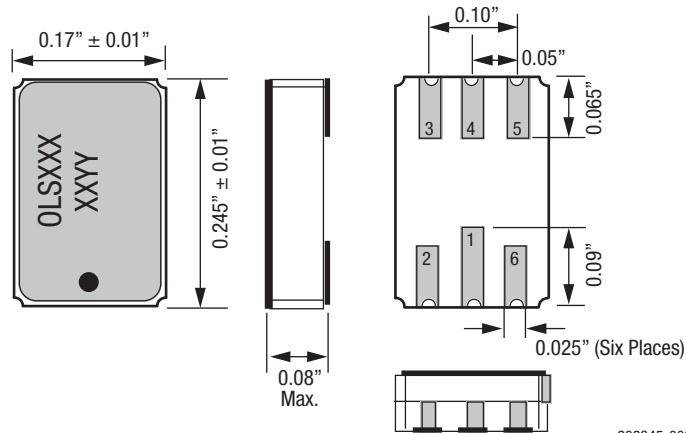

**Figure 2. OLS700 Package Dimensions**

## Ordering Information

Model Name	Manufacturing Part Number
OLS700: Hermetic Surface-Mount Isolinear Optocoupler	OLS700

Copyright © 2012, 2016-2017 Isolink, Inc. All Rights Reserved.

Information in this document is provided in connection with Isolink, Inc. ("Isolink"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Isolink as a service to its customers and may be used for informational purposes only by the customer. Isolink assumes no responsibility for errors or omissions in these materials or the information contained herein. Isolink may change its documentation, products, services, specifications or product descriptions at any time, without notice. Isolink makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Isolink assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Isolink products, information or materials, except as may be provided in Isolink Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. ISOLINK DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. ISOLINK SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are responsible for their products and applications using Isolink products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Isolink assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Isolink products outside of stated published specifications or parameters.

Isolink is a trademark of Isolink Inc. in the United States and other countries. Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.