


NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	BRASS	Surface : Tin plating 1 μm MIN Under plating : Nickel plating 0.5 μm MIN		6	PS		Reel . Black
2	BRASS	Surface : Tin plating 1 μm MIN Under plating : Nickel plating 0.5 μm MIN		5	Polyester		Clear [Cover tape]
1	LCP	UL94V-0, Black		4	PS		Clear [Embossed carrier tape]


UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	10:1	△	APPROVED : KI. AKIYAMA 14.08.01 CHECKED : HK. UMEHARA 14.08.01 DESIGNED : TT. OHSAKO 14.08.01 DRAWN : TT. OHSAKO 14.08.01			

DRAWING NO.	PART NO.	CODE NO.
EDC3-354319-01	DF65-7P-1.7V(21)	CL666-6014-9-21



Style and dimension of reel (Free)

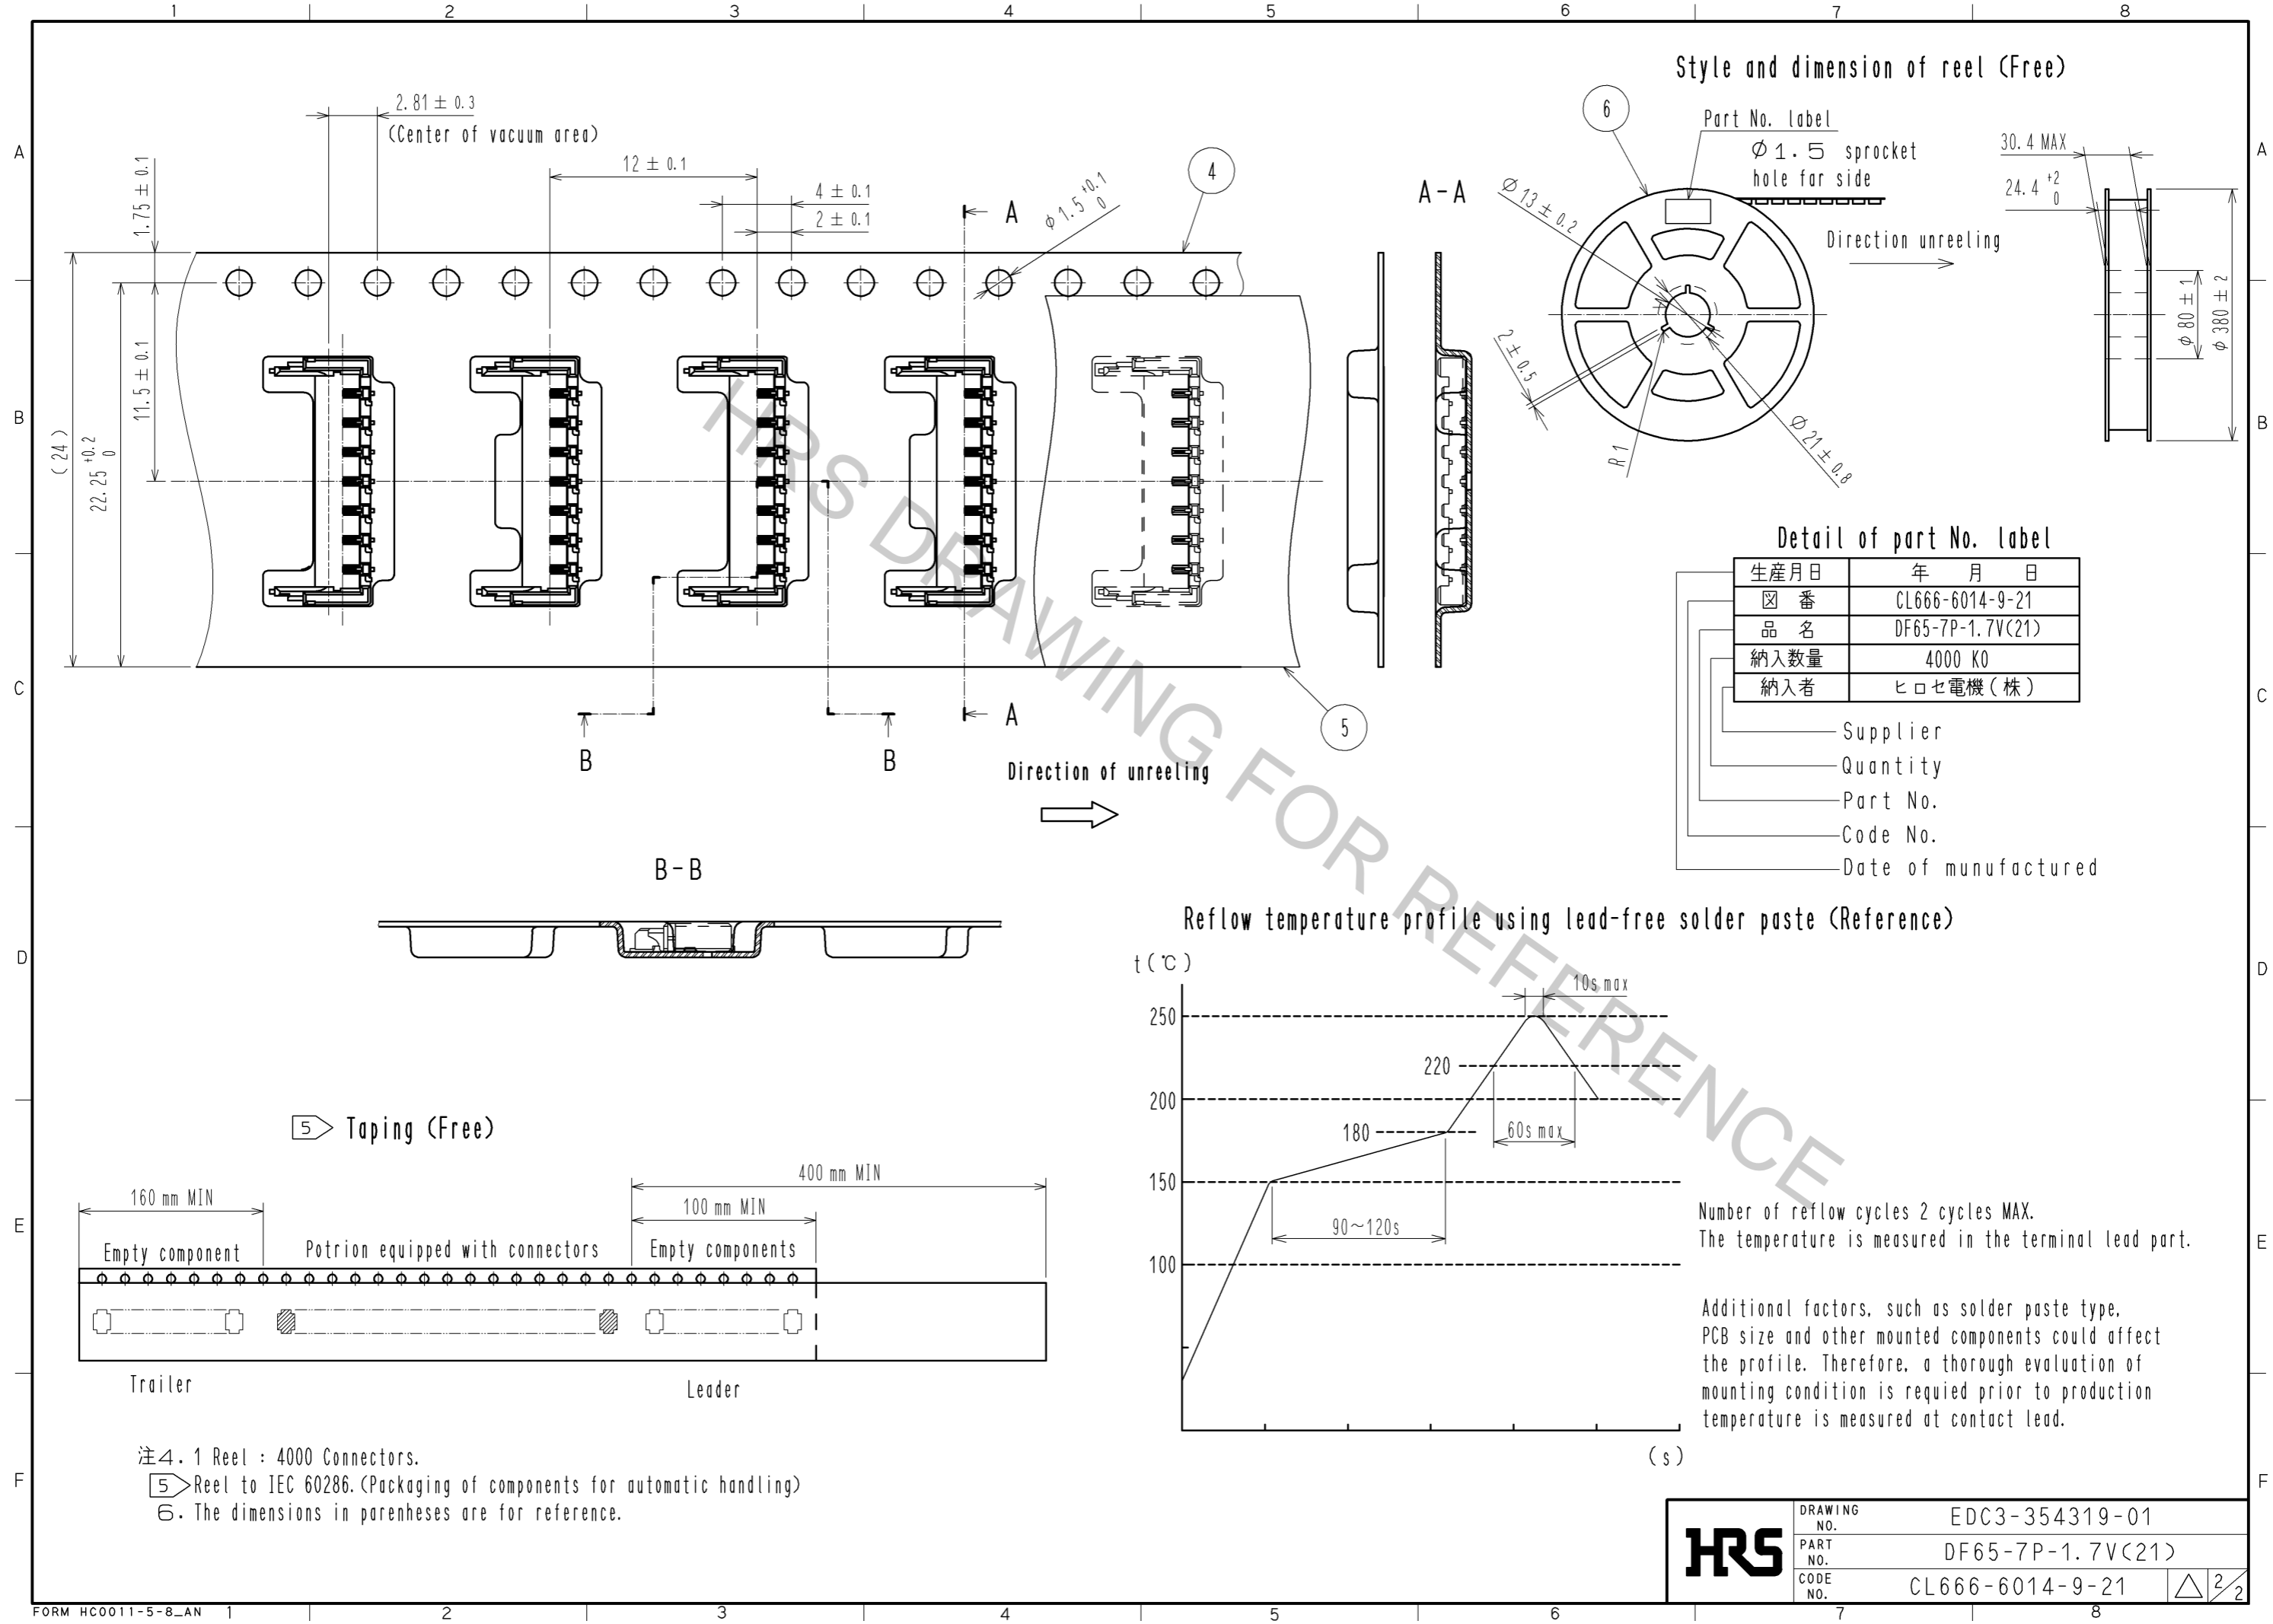


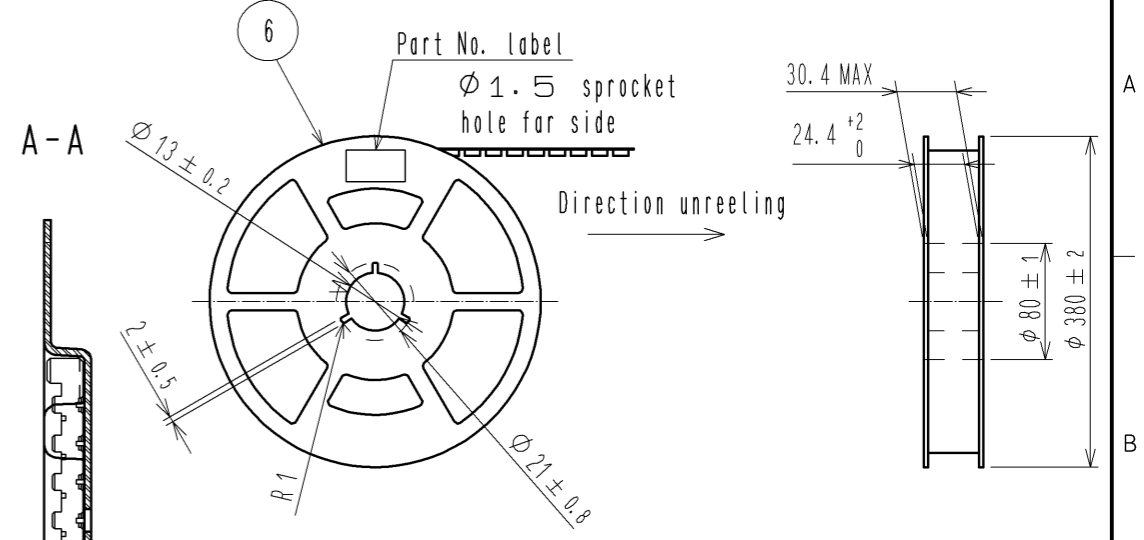Detail of part No. label

生産月日	年 月 日
箱 番	CL666-6014-9-21
品 名	DF65-7P-1.7V(21)
納入数量	4000 KO
納入者	ヒロセ電機(株)

- Supplier
- Quantity
- Part No.
- Code No.
- Date of manufactured


Reflow temperature profile using lead-free solder paste (Reference)

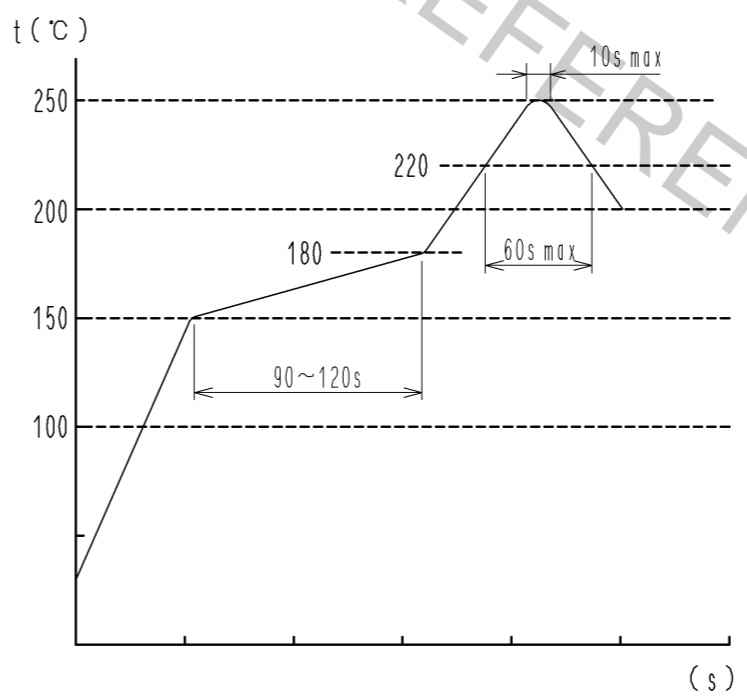

Number of reflow cycles 2 cycles MAX.  
The temperature is measured in the terminal lead part.

Additional factors, such as solder paste type, PCB size and other mounted components could affect the profile. Therefore, a thorough evaluation of mounting condition is required prior to production temperature is measured at contact lead.

5 Taping (Free)

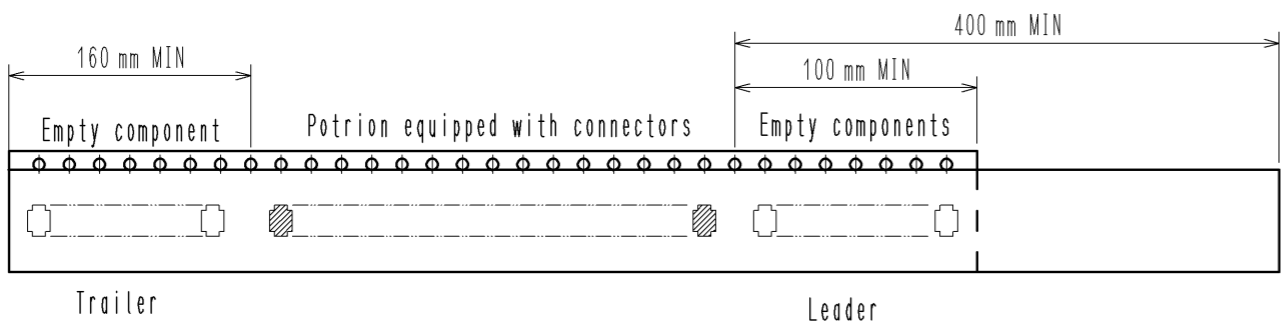

注4.1 Reel : 4000 Connectors.  
5 Reel to IEC 60286. (Packaging of components for automatic handling)  
6. The dimensions in parentheses are for reference.

<b>HRS</b>	DRAWING NO.	EDC3-354319-01
	PART NO.	DF65-7P-1.7V(21)
	CODE NO.	CL666-6014-9-21
		△ 2/2