

# Distributor Stocking Part

# Fox Part Number: FQ7050BR-6.000




**RESIN-SEALED, SMD, CRYSTAL  
MODEL: FQ7050B**

*RoHS / REACH Compliant / Pb Free*


## A. Standard Specifications

Parameters	
Frequency	6.000MHz
Resonance Mode	Fundamental
Frequency Tolerance @ 25°C	±30 PPM Max
Frequency Stability, ref @ 25°C Over Operating Temp. Range	±30 PPM Max
Temperature Range Operating (T <sub>OPR</sub> ) Storage (T <sub>STG</sub> )	-40°C ~ +85°C -40°C ~ +85°C
Equivalent Series Resistance (ESR)	80 Ohms Max
Shunt Capacitance (C <sub>O</sub> )	7 pF Max
Load Capacitance (C <sub>L</sub> )	20 pF
Drive Level	0.5 mW Max
Aging per year	±5 PPM Max
Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish:	Au
Weight (TYP)	72.8 mg


## B. Mechanical / Dimensions (millimeters):

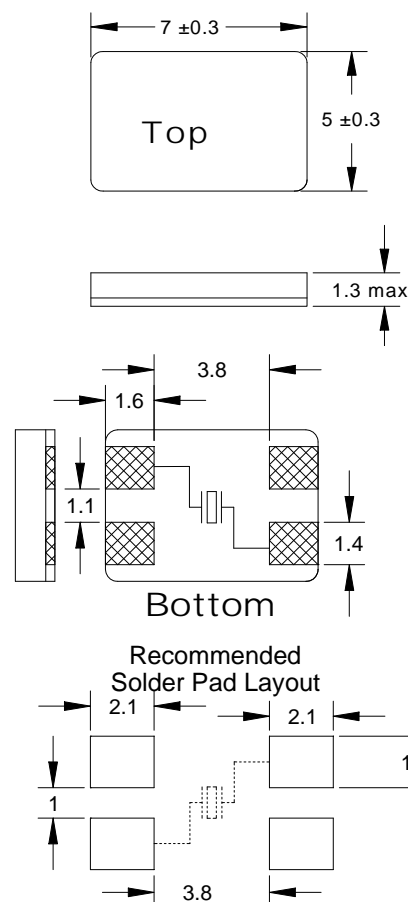

## FQ Series Marking Identification

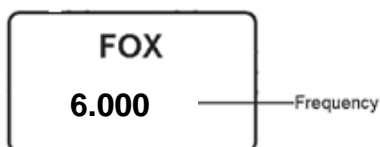

## C. Tape & Reel Specifications (in millimeters)

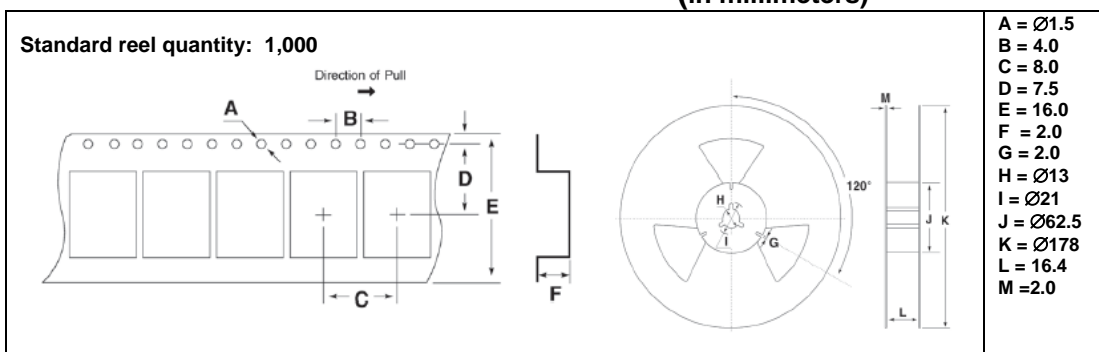

**NOTE:** The above specifications, having been carefully prepared and checked, is believed to be accurate at the time of publication; however, no responsibility is assumed by Fox Electronics for inaccuracies.

Reference / Comments	Title / Description: Product Specifications		
Initial release	Drawing Number: DOC101003	Rev: 1	Size: A
	Part Number: FQ7050BR-6.000		Cage: 61429
	Draftsperson: AR	Approved: GB	Date: 05-20-2014