


REVISONS		DATE	DWN	APVD
U	REV PER ECO 10-015874	8-4-10	CT	KT

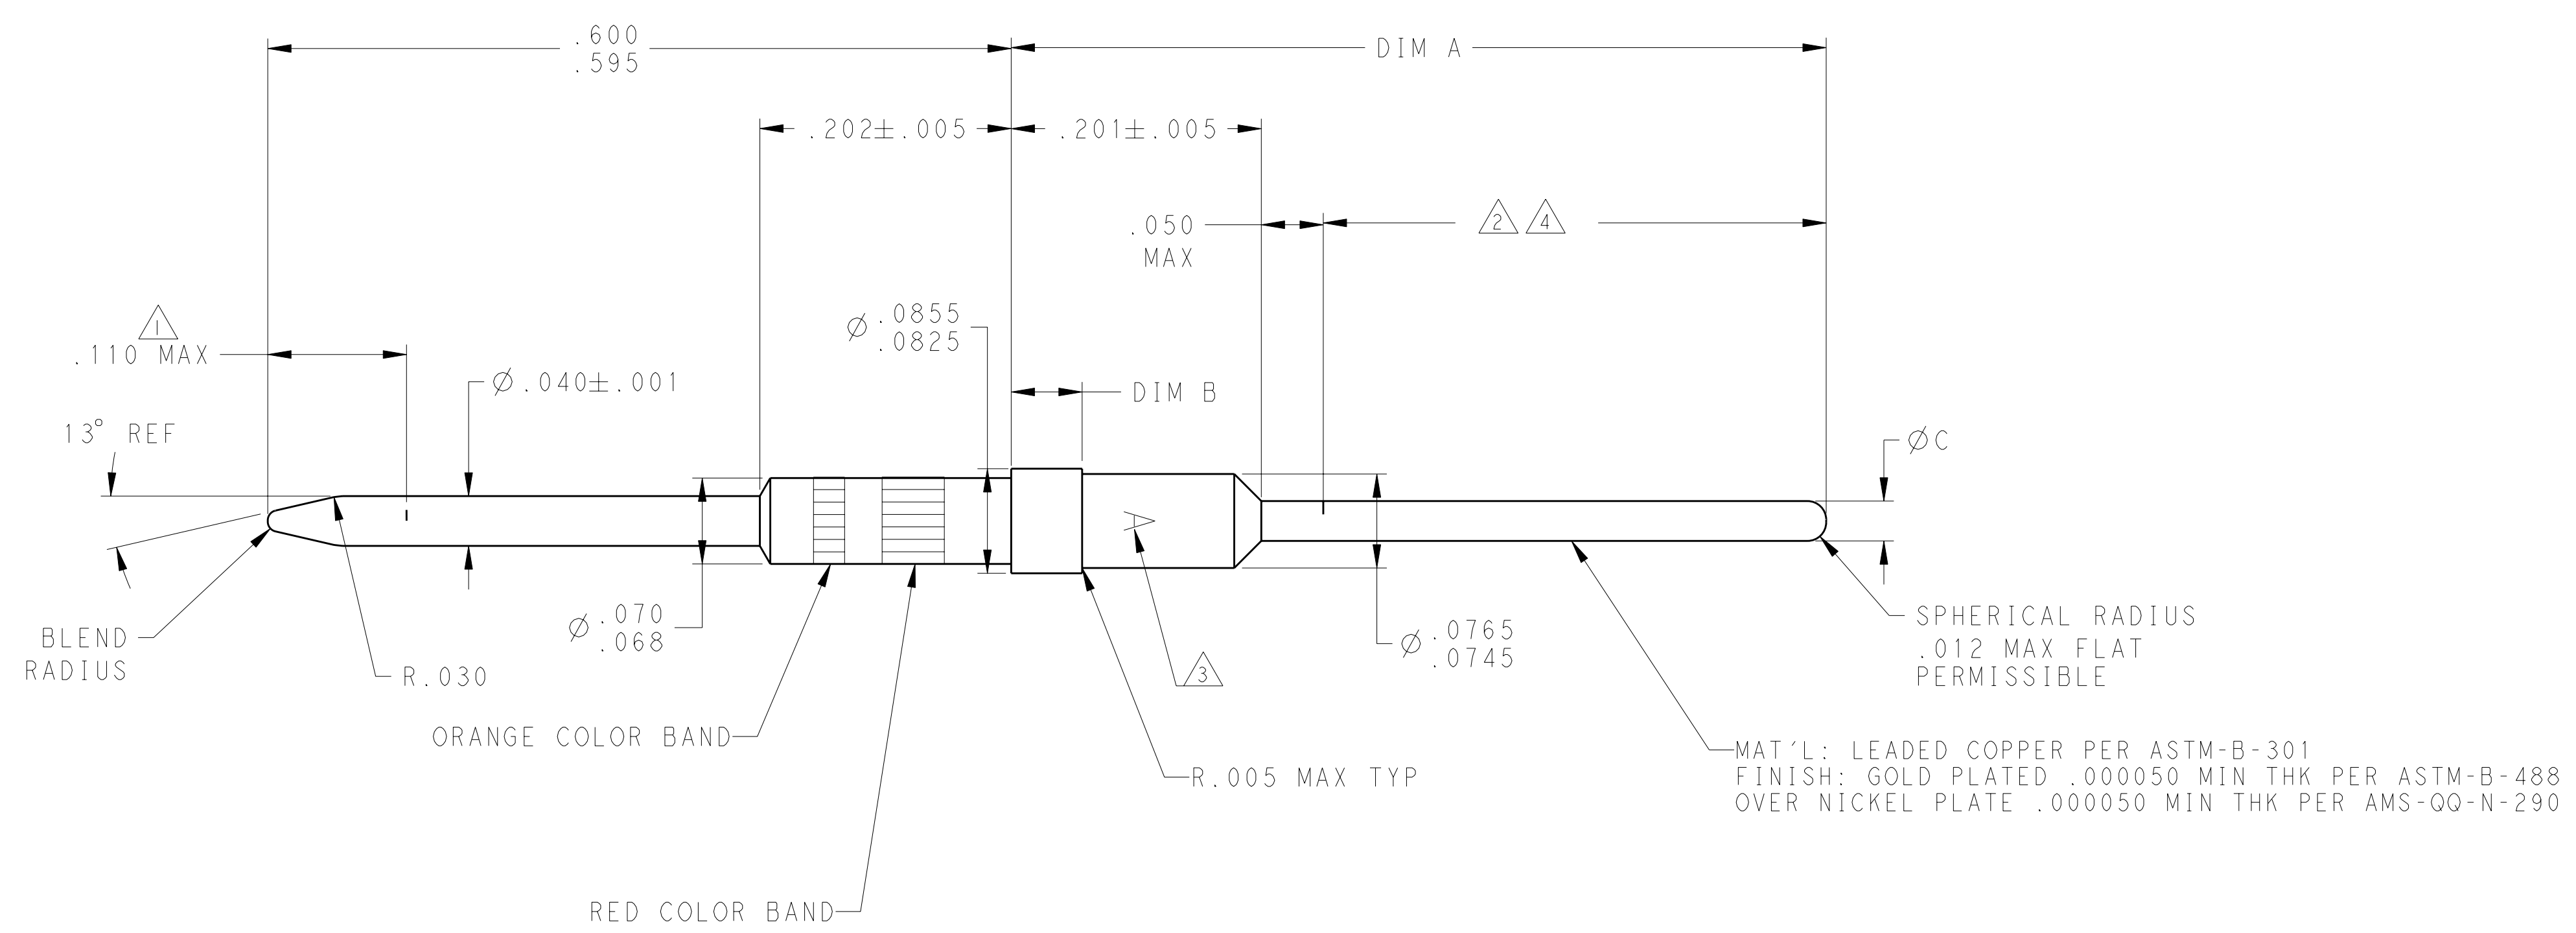

△2	.038 MAX	.055-.059	.697	--	4-448138-2
	.030-.034	.055-.059	.697±.005	--	4-448138-1
△2 △4	.038 MAX	.055-.059	.780	--	3-448138-8
△2	.038 MAX	.055-.059	.780	--	3-448138-7
--	.030-.034	.055-.059	.780±.005	--	3-448138-6
△2	.038 MAX	.055-.059	.620±.005	--	3-448138-3
△2 △4	.038 MAX	.055-.059	.620±.005	--	3-448138-2
△2	.038 MAX	.055-.059	.905±.005	--	3-448138-1
--	.030-.034	.055-.059	.905±.005	--	3-448138-0
△2	.038 MAX	.055-.059	.661	--	2-448138-7
--	.030-.034	.055-.059	.655±.005	--	2-448138-6
--	.030-.034	.055-.059	.620±.005	--	2-448138-3
--	.030-.034	.055-.059	.404±.005	--	2-448138-0
△2	.038 MAX	.055-.059	.510±.005	--	1-448138-7
△2	.038 MAX	.055-.059	.546±.005	--	1-448138-6
--	.030-.034	.055-.059	.546±.005	--	1-448138-5
--	.030-.034	.055-.059	.510±.005	--	1-448138-2
--	.030-.034	.0655-.0695	.546	906-60033-17	448138-9
--	.030-.034	.0655-.0695	.661	906-60033-7	448138-6
--	.030-.034	.0655-.0695	.546	906-60033-3	448138-3
REMARKS	DIM C	DIM B	DIM A	CUSTOMER PART NO.	PART NO.

- △ ELECTRICAL ENGAGEMENT POINT.
- △2 THIS AREA SOLDER DIPPED.
- △3 MANUFACTURERS LOGO; LACATION & ORIENTATION OPTIONAL.
- △4 SOLDER IS RoHS-COMPLIANT Sn.

DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN: C.C. THOMAS 27OCT2009		Tyco Electronics Harrisburg, PA 17105-3608	
9 PLC ± 1 PLC ± 3 PLC ± 4 PLC ±.010 ANGLES ± FINISH SEE CALLOUTS		9 PLC ± 1 PLC ± 3 PLC ± 4 PLC ±.010 ANGLES ± FINISH SEE CALLOUTS		CHK: K. THACKSTON 27OCT2009 APVD: K. THACKSTON 27OCT2009 PRODUCT SPEC APPLICATION SPEC		NAME: POSTED PIN CONTACT, SIZE 20, ARINC 600 SIZE: CAGE CODE DRAWING NO: A100779 C=448138 RESTRICTED TO:	
MATERIAL: SEE TABLE		FINISH: SEE CALLOUTS		WEIGHT: -		CUSTOMER DRAWING	
4805 (2/09)		Pro/ENGINEER DRAWING		SCALE: 15:1		SHEET 1 OF 1 REV U	