

**Ratings**

Voltage: 300 V  
 Temperature: -40 ~80 °C  
 Flammability: FT2

**Conductor**

Conductor count: 4  
 Gauge: 24 AWG 0.22 mm<sup>2</sup>  
 Material: bare copper strands  
 Strand size:  $\varnothing 0.1 \times 26$   
 Max resistance at 20 °C: 87.6  $\Omega$  /km

**Insulator**

Material: TPE 85A  
 Color: white, black, red, yellow  
 Diameter:  $\varnothing 1.1 \pm 0.10$  mm  
 Nominal thickness: 0.24 mm  
 Minimum resistance @ 20 °C: 100 M $\Omega$  /km

**Shield**

Type: braided  
 Material: bare copper strands  
 Stranding:  $\varnothing 0.10$  mm, 65% minimum coverage

**Drain**

Material: bare copper strands  
 Stranding:  $\varnothing 0.1 \times 26$

**Outer jacket**



Material: TPU (Polyether Polyurethane) 80A  
 Color: black  
 Diameter:  $\varnothing 4.8 \pm 0.20$  mm  
 Nominal thickness: 0.80 mm

**Wire marking:** E339579 UL AWM STYLE 20280 24 AWG 80°C 300V --- cUL AWM I/II A 80 °C 300V FT2 TENSILITY

**Tests**

Voltage test: 300 V  
 Spark test: 3.0 kV  
 Insulation tensile strength: 0.562 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113  $\pm 2$  °C for 7 days:  
 Minimum jacket tensile strength 70 % original  
 Minimum insulation tensile strength 75 % original  
 Minimum jacket elongation 65 % original  
 Minimum insulation elongation 75 % original  
 Heat shock: 121  $\pm 1$  °C /1 hour, no observed degradation  
 Deformation: 121  $\pm 1$  °C /1 hour,  $\leq 50$  %  
 Cold bend: -10  $\pm 2$  °C /1 hour, no observed cracking  
 Dielectric test: 2000 Vac for 1 minute without breakdown

**Use:** Internal wiring or external interconnection of electronic equipment.

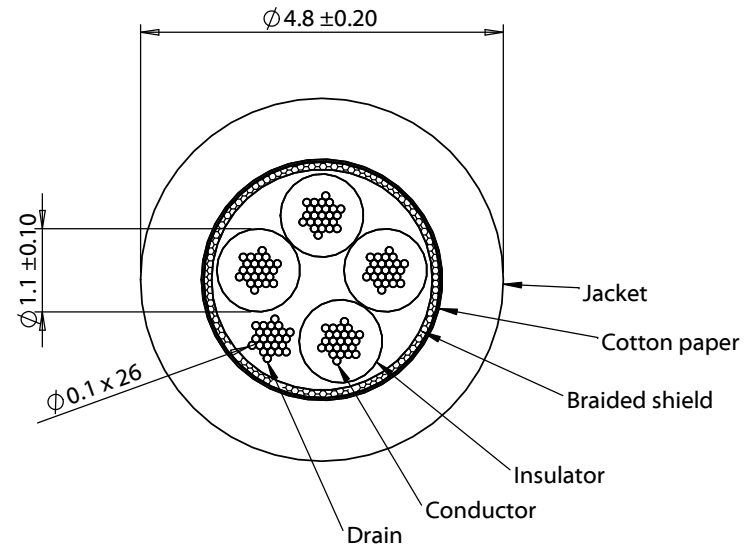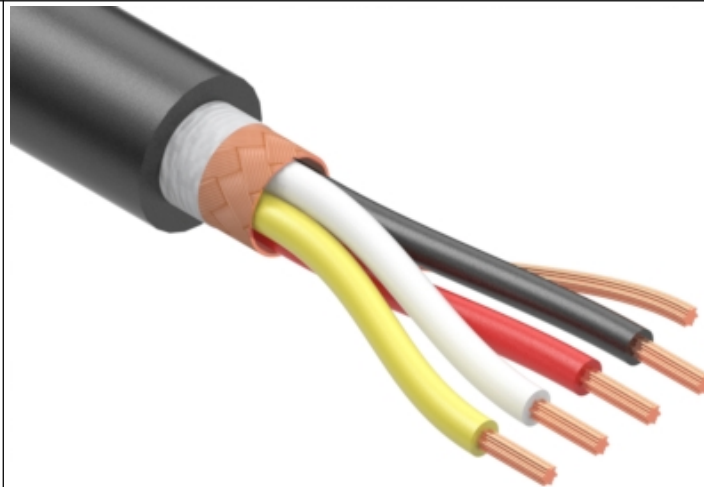

Revision:	Date:	Description:
A	3/28/2018	Initial release

Prepared:	Notes: RoHS and REACH compliant
Verified:	
Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Description: Wire, 4C BC, 24 AWG, UL20280, 300V, 80C, 4.8 mm braided shield, FT2, TPU

Function test: no open, no short circuit, no intermittent
Scale: 10:1

# TENSILITY

tel 1.541.323.3228 800 877.670.7118  
 fax 1.541.323.4202 web tensility.com

Size: A Part number: 30-00918

Scale: 10:1