

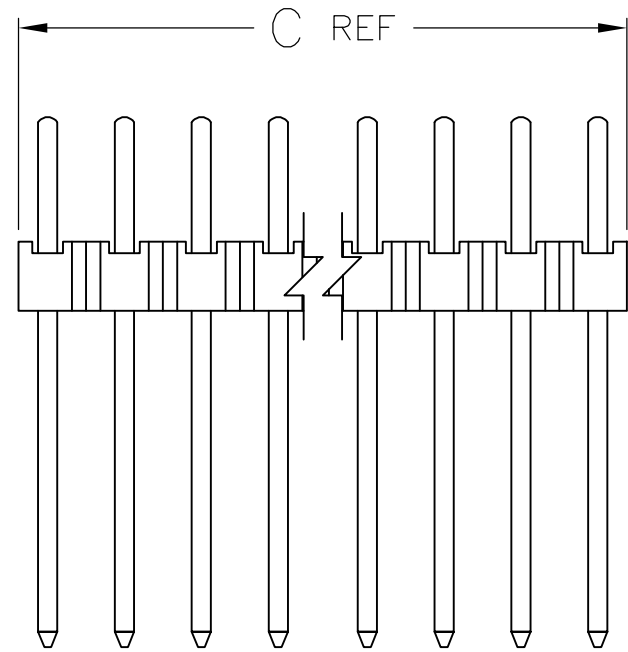
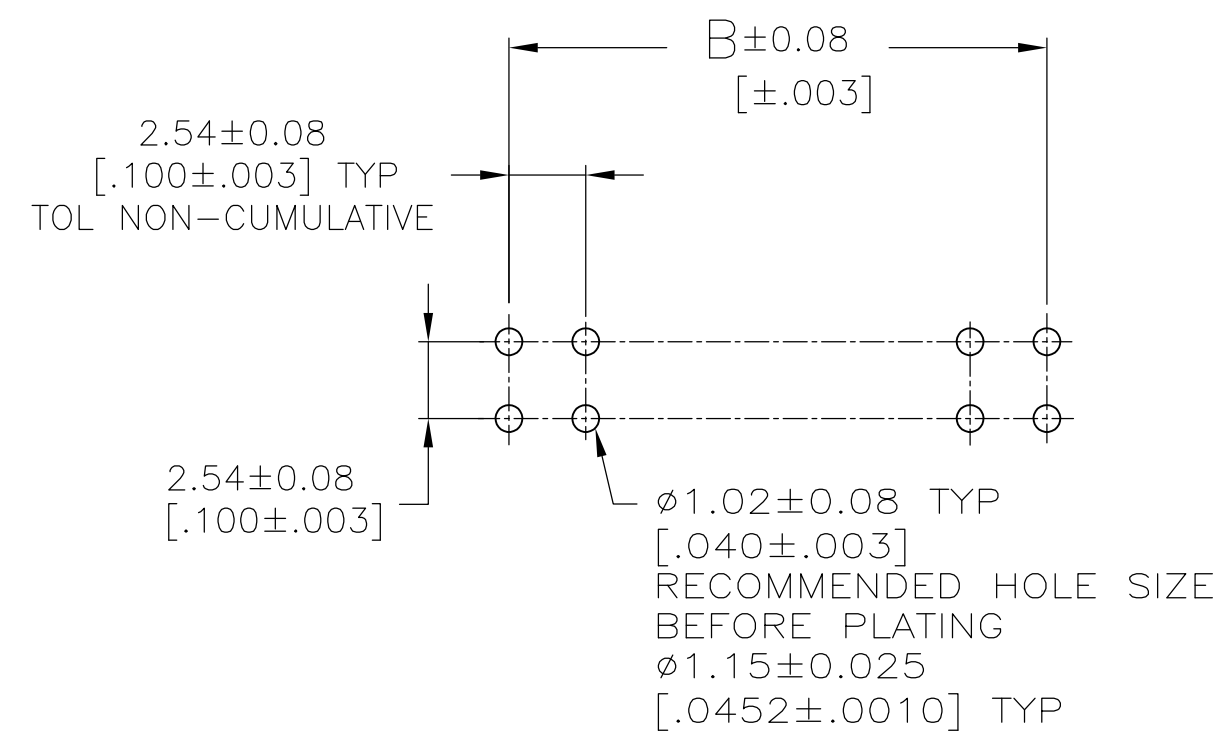


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
AD	00	D	REVISED PER	ECO-14-000264	12JUL2014	NK	MM	

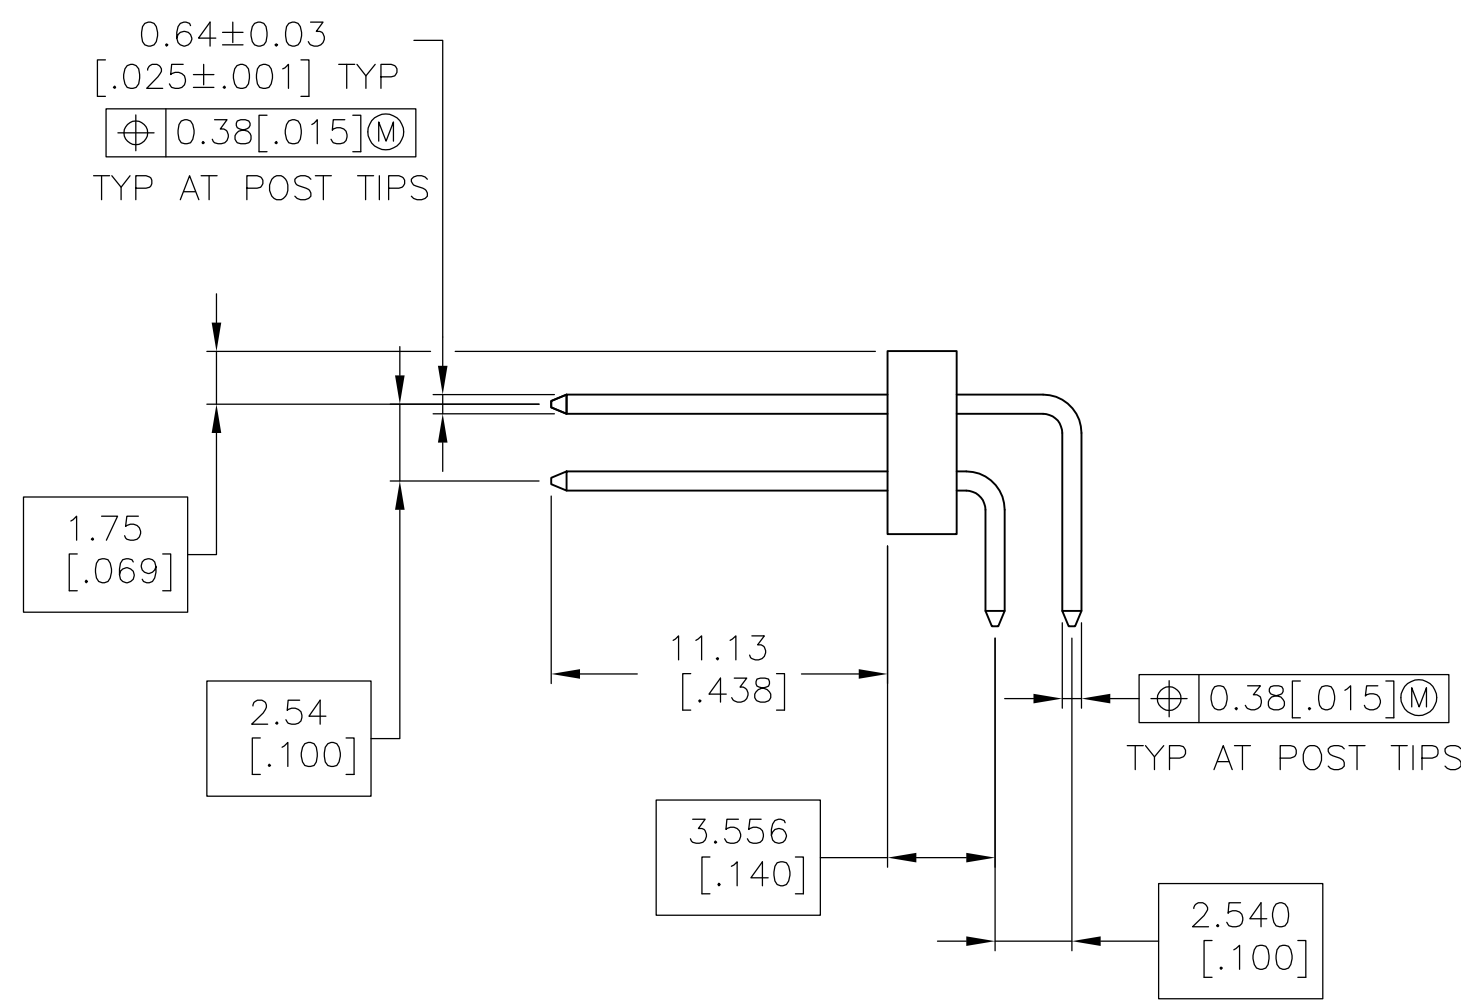

- 1 ASSEMBLIES MAY BE BROKEN TO DESIRED NO OF POSITIONS.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK.
- 4 POSTS: COPPER ALLOY.
- 5 POSTS: 0.00254-0.00508 [.000100-.000200] BRIGHT TIN OVER 0.00127 [.000050] NICKEL.
- 6 POSTS: 0.00254-0.00508 [.000100-.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION.

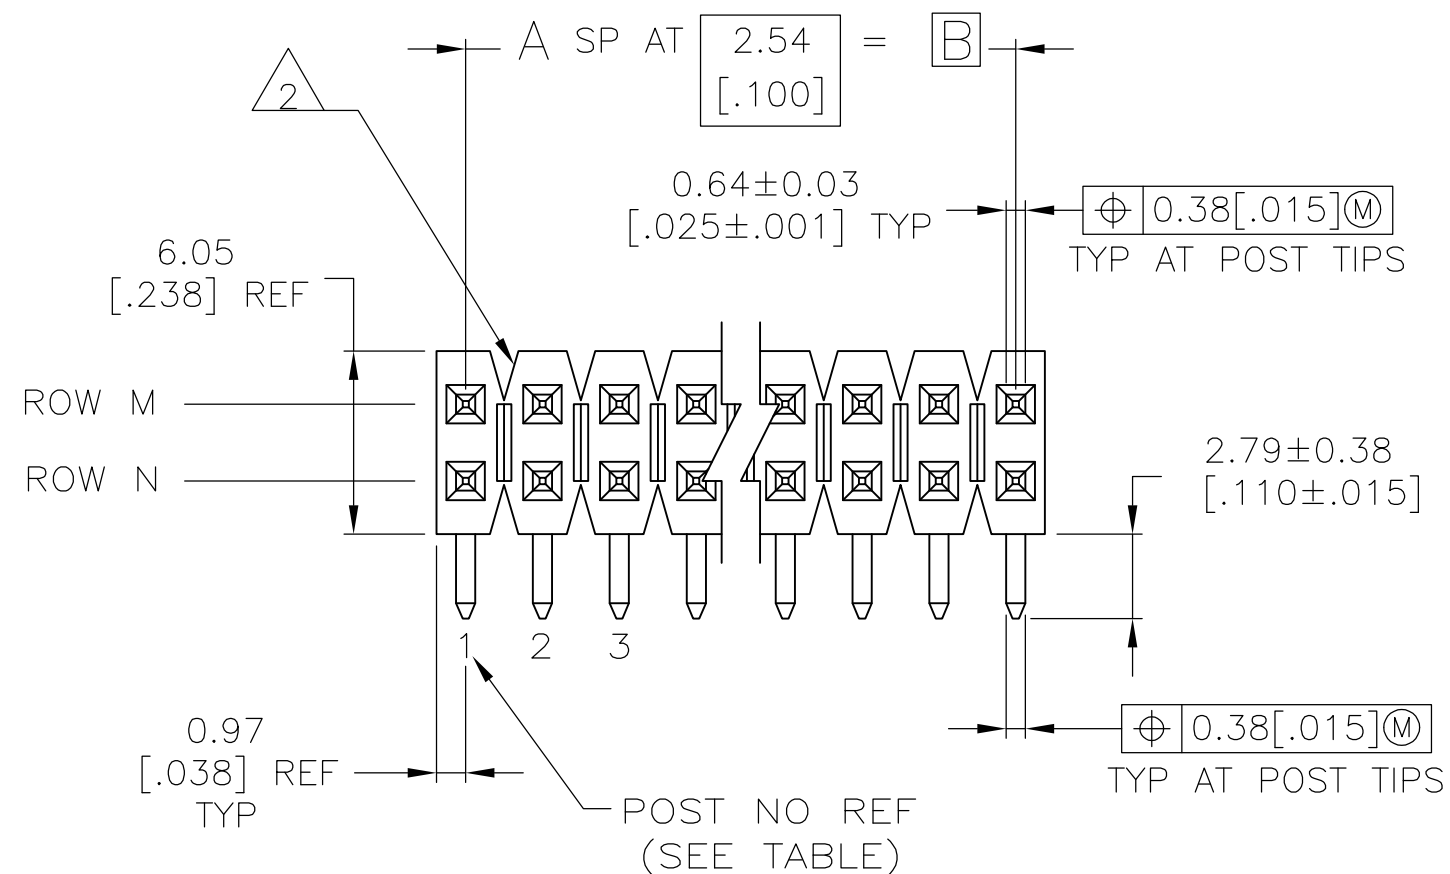

RECOMMENDED HOLE LAYOUT

7	6	1,2,17,18	NONE	45.11 [1.776]	43.18 [1.700]	17	36	5-147111-1
	5	1,2,17,18	NONE	45.11 [1.776]	43.18 [1.700]	17	36	147111-1
REMARKS	PLATING	ROW N	ROW M	C	B	A	NO OF POSN	PART NUMBER
		HOLD DOWN POST CONFIG LOCATION						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN B. HAYMAKER 20OCT98  
 CHK J. GESFORD 20OCT98  
 APVD J. GESFORD 20OCT98

TE Connectivity

NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW, .100 X .100 CL, RIGHT ANGLE, .025 SQUARE POSTS WITH HOLD DOWN CONFIGURATIONS

SIZE A2 CAGE CODE 00779 DRAWING NO C=147111 RESTRICTED TO

MATERIAL SEE TABLE FINISH SEE TABLE WEIGHT - SCALE 4:1 SHEET 1 OF 1 REV D