

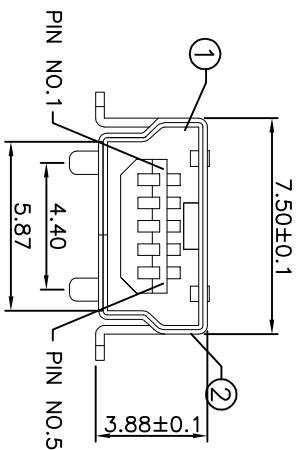
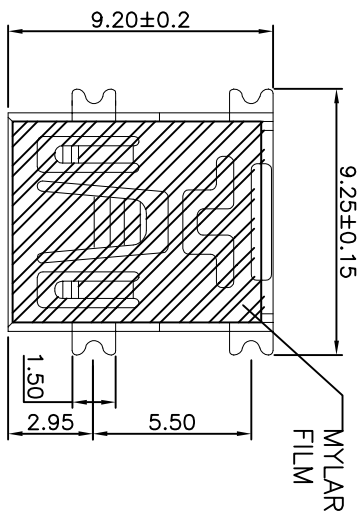

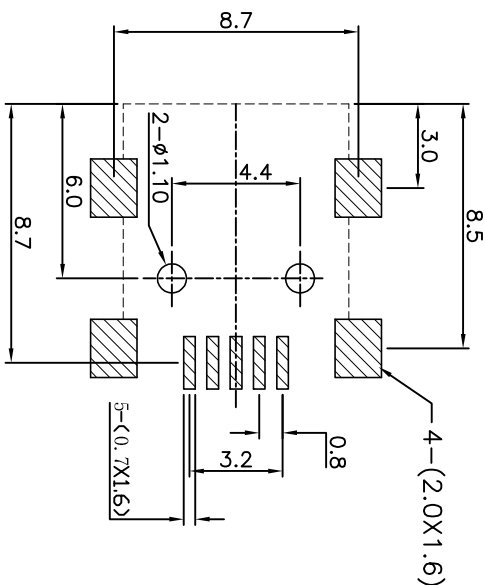


TOLERANCE UNLESS SPECIFIED
 WITHIN 1.5: ±0.1mm
 OVER 1.5: ±0.2mm
 ANGLES: ±2°

THIS IS A C.A.D. GENERATED DRAWING
 DO NOT MAKE MANUAL REVISIONS TO MASTER.

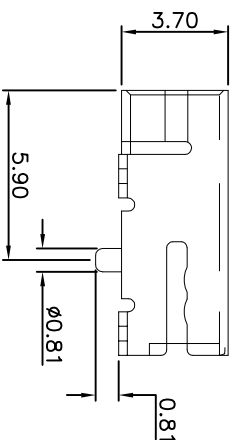

P.C.B LAYOUT
 TOP VIEW

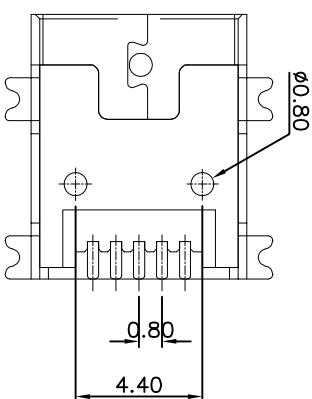

Materials:

- ① Housing: Thermoplastic UL94V-0 Black color.
- ② Shell: Brass, Nickel plated.
- ③ Contact: Phosphor Bronze Gold plated on contact are
Tin on tail over Nickel-Under plating.

Specifications:

1. Current rating: 1 A Max.
2. Dielectric withstanding:voltage: 100 V(ac) for 1 min.
3. Contact resistance: 50 mW Max.
4. Insulation resistance: 100 MW Min.
5. Total mating force: 3.57 Kgf Max.
6. Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.
After 3000 insertion/extraction cycles.
7. Temperature range: -30°C~+80°C

Soldering temperature: 260°C±5°C for 5±0.5 sec.

Resistance to soldering heat: 260°C±5°C for 5±0.5 sec.

Storage temperature range: -20°C to +60°C


Thermal resistance: 96 hours in 60°C±3°C

Plating Options Part Number
 Gold Flash 690-005-299-043
 30 Microinches 690-005-699-043

5 PIN MINI USB-B RIGHT ANGLE SURFACE MOUNT



THIS SERIES FULLY CONFORMS TO THE
 EUROPEAN UNION DIRECTIVES
 2011/65/EU FOR ROHS COMPLIANCY.



EDAC INC
 TORONTO, ONTARIO
 CANADA





YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
 ARE THE PROPERTY OF EDAC INC. AND
 SHALL NOT BE REPRODUCED, OR COPIED
 OR USED AS THE BASIS FOR THE
 MANUFACTURE OR SALE OF APPARATUS
 WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.	690-005-299-043
DRAWN:	N.SONDH
DATE:	JAN.27/15
CHECKED:	DATE:
SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2
DRAWING NUMBER	690-005-299-043
ISSUE	8

ISSUE NUMBER	
ADDED PLATING/PART NUMBER TABLE	③
J.LEE	JUNE 30/09
DRAWING UPDATED	
NEW TOOLING	
N.SONDH	JAN.27/15
PIN NO'S ADDED	④
F.BRIONES	JAN.28/15
SOLDERING TEMP. ETC.	⑤
ADDING	
F.BRIONES	JUL.29/15
ADD TAPE & REEL INFORMATION	⑥
R.STA.MONICA	AUG.18/2015
UPDATE DWG	⑦
ADD MYLAR FILM	
R.STA.MONICA	NOV.17/2016
	⑧

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

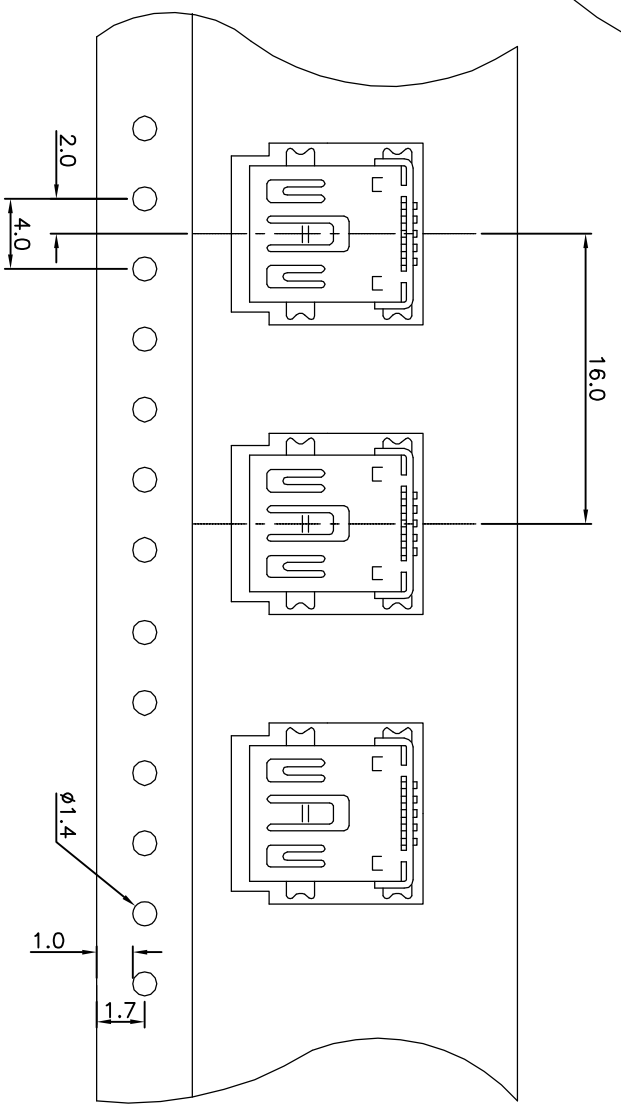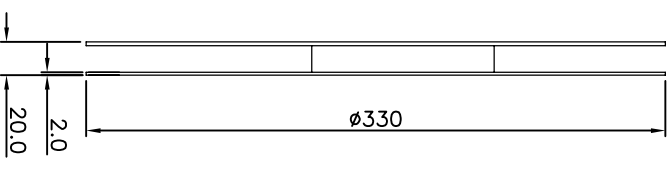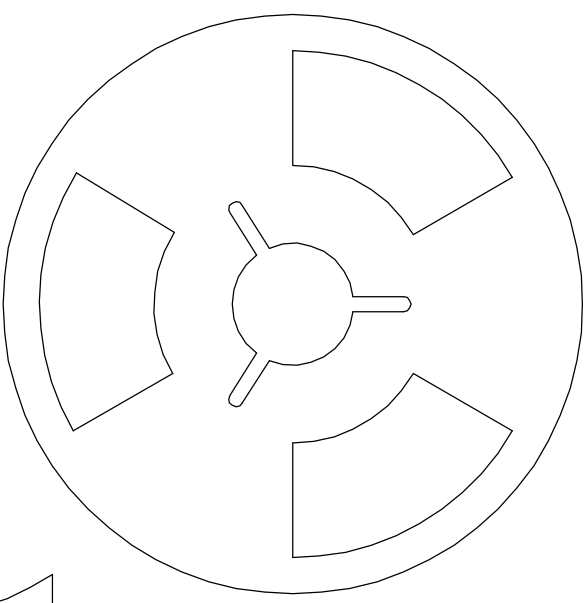

QUANTITY: 1,000 PCS PER REEL



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES
2011/69/EU FOR RoHS COMPLIANCY.

5 PIN MINI USB-B RIGHT ANGLE SURFACE MOUNT
TAPE AND REEL SPECS

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.	690-005-299-043
DRAWN: R.STA.MONICA	DATE: AUG.18/15
CHECKED:	DATE:
SCALE: (IN C.A.D. 1:1)	SHEET 2 OF 2
DRAWING NUMBER	690-005-299-043
ISSUE	8