


Part Number: 6339Q8

Surveillance CATV MATV, RG-6 #18 BC, Quad Shield, CMP

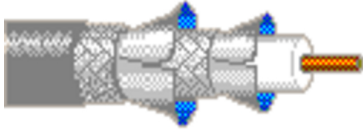

Product Description

Surveillance, CATV & MATV Cable, RG6, Plenum-CMP & CATVP, 18 AWG solid bare copper, foam FEP core, quad shield-Duofoil® + 60% aluminum braid + Duofoil® + 40% aluminum braid, Flam arrest® jacket

Technical Specifications

Product Overview

Suitable Applications:	CATV, MATV
------------------------	------------

Physical Characteristics (Overall)

Conductor

AWG	Stranding	Material	Nominal Diameter	No. of Pairs	No. of Coax
18	Solid	BC - Bare Copper	0.04 in	1	1
				1	

Conductor Size:	18 AWG
-----------------	--------

Insulation

Material	Nominal Diameter
FFEP - Foam Fluorinated Ethylene Propylene	0.168 in

Color Chart

Number
1
1
1
1
1
1
1

Outer Shield Material

Type	Layer	Material	Material Trade Name	Coverage [%]
Tape	1	Aluminum/Polyester/Aluminum	Duofoil®	100 %
Braid	2	AL - Aluminum		60 %
Tape	3	Aluminum/Polyester/Aluminum	Duofoil®	100 %
Braid	4	AL - Aluminum		40 %

Outer Jacket Material

Material	Material Trade Name	Nominal Diameter	Nominal Wall Thickness
LS PVC - Low Smoke Polyvinyl Chloride	Flam arrest®	0.246 in	0.015 in

Construction and Dimensions

Print Legend:	NEW GENERATION® BY BELDEN-E 6339Q8 1C18 75°C E108998 (UL) CMP OR CATVP OR C(UL) CMP (2 FOOT, 7 DIGIT SEQUENTIAL FOOTAGE) FEET
---------------	---

Electrical Characteristics

Conductor DCR

Nominal Conductor DCR	Nominal Outer Shield DCR	Outer Conductor DCR
6.4 Ohm/1000ft	2.5 Ohm/1000ft	25. Ohm/1000ft

Capacitance

Nom. Capacitance Conductor to Shield

16.3 pF/ft

Shielding: Foil + Braid + Foil + Braid (Quad)

Inductance

Nominal Inductance

0.097 μ H/ft

Impedance

Nominal Characteristic Impedance

75 Ohm

High Frequency (Nominal/Typical)

Frequency [MHz]	Nom. Insertion Loss
1 MHz	0.24 dB/100ft
3 MHz	0.45 dB/100ft
5 MHz	0.55 dB/100ft
8 MHz	0.70 dB/100ft
10 MHz	0.85 dB/100ft
50 MHz	1.5 dB/100ft
100 MHz	2.1 dB/100ft
200 MHz	3.1 dB/100ft
400 MHz	4.5 dB/100ft
700 MHz	6.0 dB/100ft
900 MHz	6.9 dB/100ft
1000 MHz	7.3 dB/100ft

Delay

Max. Delay Skew	Nominal Delay	Nominal Velocity of Propagation (VP) [%]
83 ns/100m	1.22 ns/ft	83 %

Voltage

UL Voltage Rating

300 V RMS

Temperature Range

UL Temp Rating:	75°C
Operating Temp Range:	-20°C To +75°C

Mechanical Characteristics

UV Resistance:	Yes - Black only
Bulk Cable Weight:	28 lbs/1000ft
Max Recommended Pulling Tension:	76 lbs
Min Bend Radius/Minor Axis:	2.5 in
Min Bend Radius/Installation:	1 in

Standards

NEC Articles:	820
NEC/(UL) Specification:	CATVP, CMP
CEC/C(UL) Specification:	CMP
RG Type:	6/U Type
Series Type:	Series 6
RG / Series Type:	Series 6

Applicable Environmental and Other Programs

EU Directive 2000/53/EC (ELV):	Yes
EU Directive 2003/96/EC (BFR):	Yes
EU Directive 2011/65/EU (ROHS II):	Yes
EU Directive 2012/19/EU (WEEE):	Yes

EU Directive 2015/863/EU:	Yes
EU Directive Compliance:	EU Directive 2003/11/EC (BFR)
EU CE Mark:	Yes
EU RoHS Compliance Date (yyyy-mm-dd):	2005-04-01
CA Prop 65 (CJ for Wire & Cable):	Yes
MII Order #39 (China RoHS):	Yes

Suitability

Suitability - Aerial:	Yes - Black only, when supported by messenger wire
Suitability - Burial:	No
Suitability - Hazardous Locations:	No
Suitability - Indoor:	Yes
Suitability - Outdoor:	Yes - Black only

Flammability, LSOH, Toxicity Testing

C(UL) Flammability:	FT6
UL Flammability:	NFPA 262
UL voltage rating:	300 V RMS

Plenum/Non-Plenum

Plenum (Y/N):	Yes
---------------	-----

Part Number

Variants

Item #	Color	Footnote
6339Q8 8771000	Natural	C
6339Q8 877U1000	Natural	

Footnote:	C - CRATE REEL PUT-UP.
-----------	------------------------

© 2018 Belden, Inc

All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.