
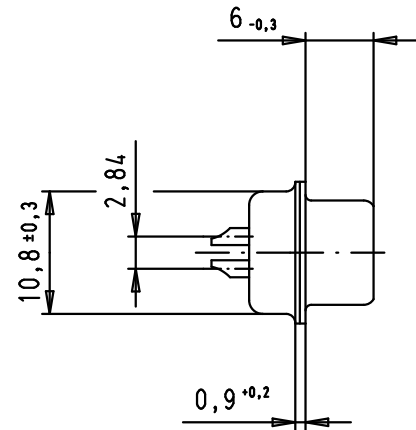



5 4 3 2 1

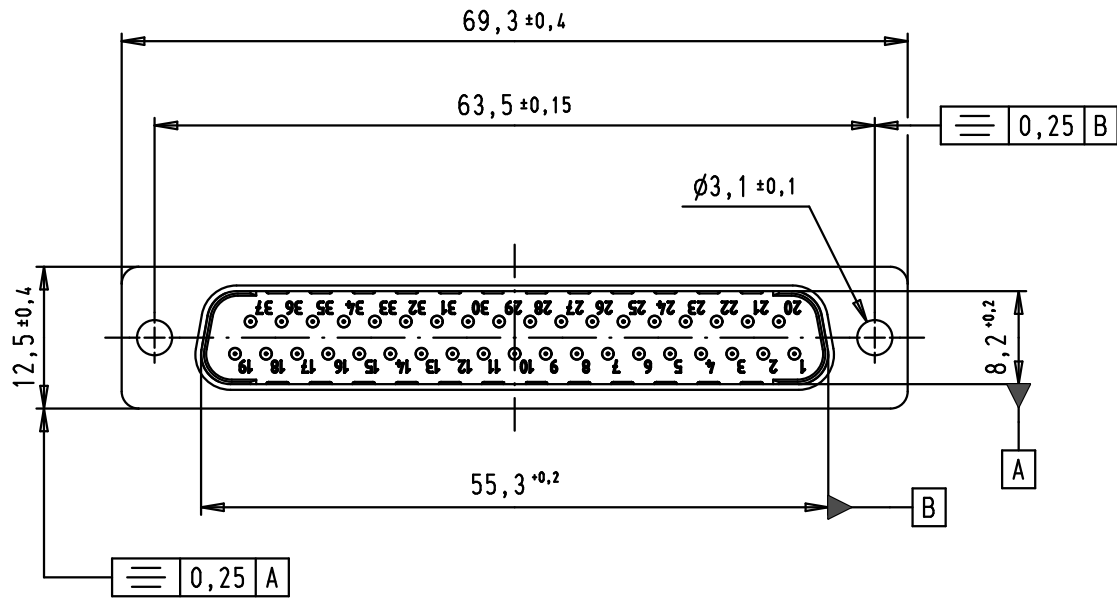

SPECIFICATIONS


Mating cycles	500
Filter type	C
Capacitance	470 pF ± 20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1
50	10
100	15
500	35
1000	32

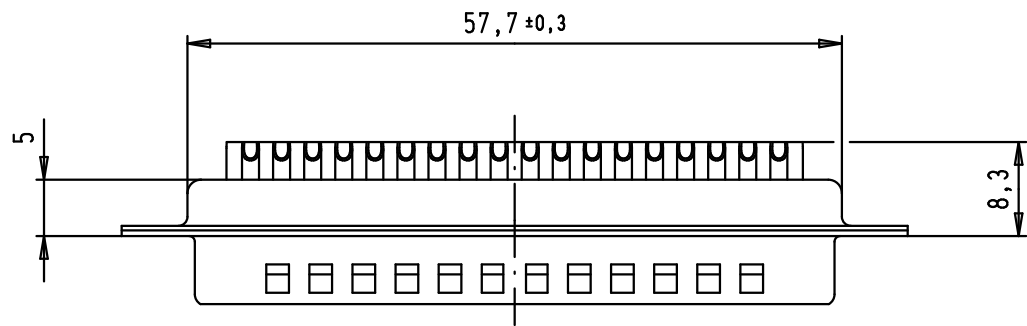

Solder buckets for AWG 20

Mod.	Dat.	Name	Dat.	Name
			08/07/02	CV
35300	01/12/08	PK	Insp.	
33800	21/08/06	PK	Stand.	
31058	08/07/02	CV		
			HARTING EURL F-95972 Paris	



All Dim. in mm
Orig. Size DIN A 4



D-Sub, male, straight,
37 poles,
turned solder buckets

TB 09 64 421 7220

Maßstab/
Scale
1,5:1
Blatt/ Page
1 / 1

D
C
B
A