


DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION



NOTES:



- 1 FOR USE ON MINIATURE APPLICATORS (LEFT-RIGHT FEED)
- 2 HANDTOOL 180320 TO BE USED.
- 3 APPLICATION SPEC. 114-19025.
- 4 PRODUCT SPEC. 108-19084.




REVERSE REELED FOR MINI APPLICATOR.



OBSELETE PARTS:OBSELETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

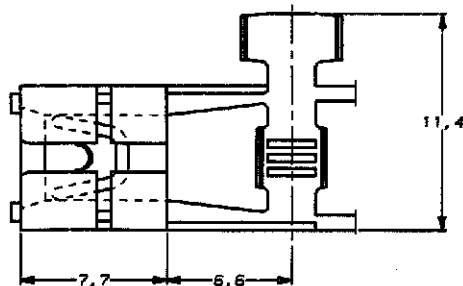

FOR 0,8 mm TAB
THICKNESS

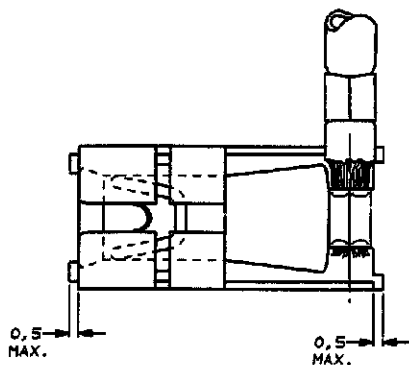

OBSELETE
 6

OBSELETE
 6

WIRE RANGE :
0,5 - 1,5 mm²
INSULATION RANGE :
2,0 - 3,8 mm DIA.

| LOOSE PIECE | FINISH | MATERIAL | PARTNUMBER |
|-------------|-----------|------------|------------|
| 100688-4 | TINPLATED | PH. BRONZE | 1-100644-4 |
| 100688-3 | UNPLATED | PH. BRONZE | 1-100644-3 |
| 100688-2 | TINPLATED | BRASS | 1-100644-2 |
| 100688-1 | UNPLATED | BRASS | 1-100644-1 |
| 100688-4 | TINPLATED | PH. BRONZE | 100644-4 |
| 100688-3 | UNPLATED | PH. BRONZE | 100644-3 |
| 100688-2 | TINPLATED | BRASS | 100644-2 |
| 100688-1 | UNPLATED | BRASS | 100644-1 |

| CUSTOMER DRAWING | | | | FOR REFERENCE ONLY WILL NOT BE UPDATED | |
|--|-----------------|------|----------|---|-----------|
| B1 | ECO-09-026346 | KK | AEG | NOV09 | |
| B | EH-0935-93 | P.B. | P.B. | 09.12.93 | |
| A | EH-0242-93 | P.B. | P.B. | 14.04.93 | |
| Q | H-9565 | P.B. | A.B. | 20.02.92 | |
| LTR. | REVISION RECORD | DR. | CHK. | DATE | |
| DR. | P.B.J.M.H. | CHK. | A.B.M.H. | APP. | A.V.BEST. |
| DATE | 20.02.92 | DATE | - | DATE | 18.02.93 |
| NAME | | | | Dwg. No. | |
| AMP | | | | C-100644 | |
| LOW INSERTION FORCE FASTON RECEPTACLE FOR 0,8 mm TABTHICKNESS .250hrs (S,3) | | | | REV. LTR. SHEET | |
| | | | | B1 1 of 1 A3 | |

DOC. CENTRE
10 DEC. 1993