


Max. Temperature : 260° during 10 seconds

09551663815.741	1	M3	Black Insulator	Reel Packaging (160 connectors) see page 2/2
09551666815.741	2			
09551667815.741	3			
Part number	PL	Thread	Index designation	

Mod.	Dot.	Name	Dot.	Name
EC01215	14Jan2010	ED	13Jul2007	ED
34884	18Feb2008	LP		
34377	13Jul2007	ED		
HARTING EURL		F-95972 Paris		

<p>All Dim. in mm Orig. Size DIN A 4</p>		<p>D-SUB SMT Low Profile Male 9p with die casted grounds and M3 nuts</p>	Maßstab/ Scale
			1,5:1
Sub.		TB 09 55 166 x815	Blatt/ Page
			1/2



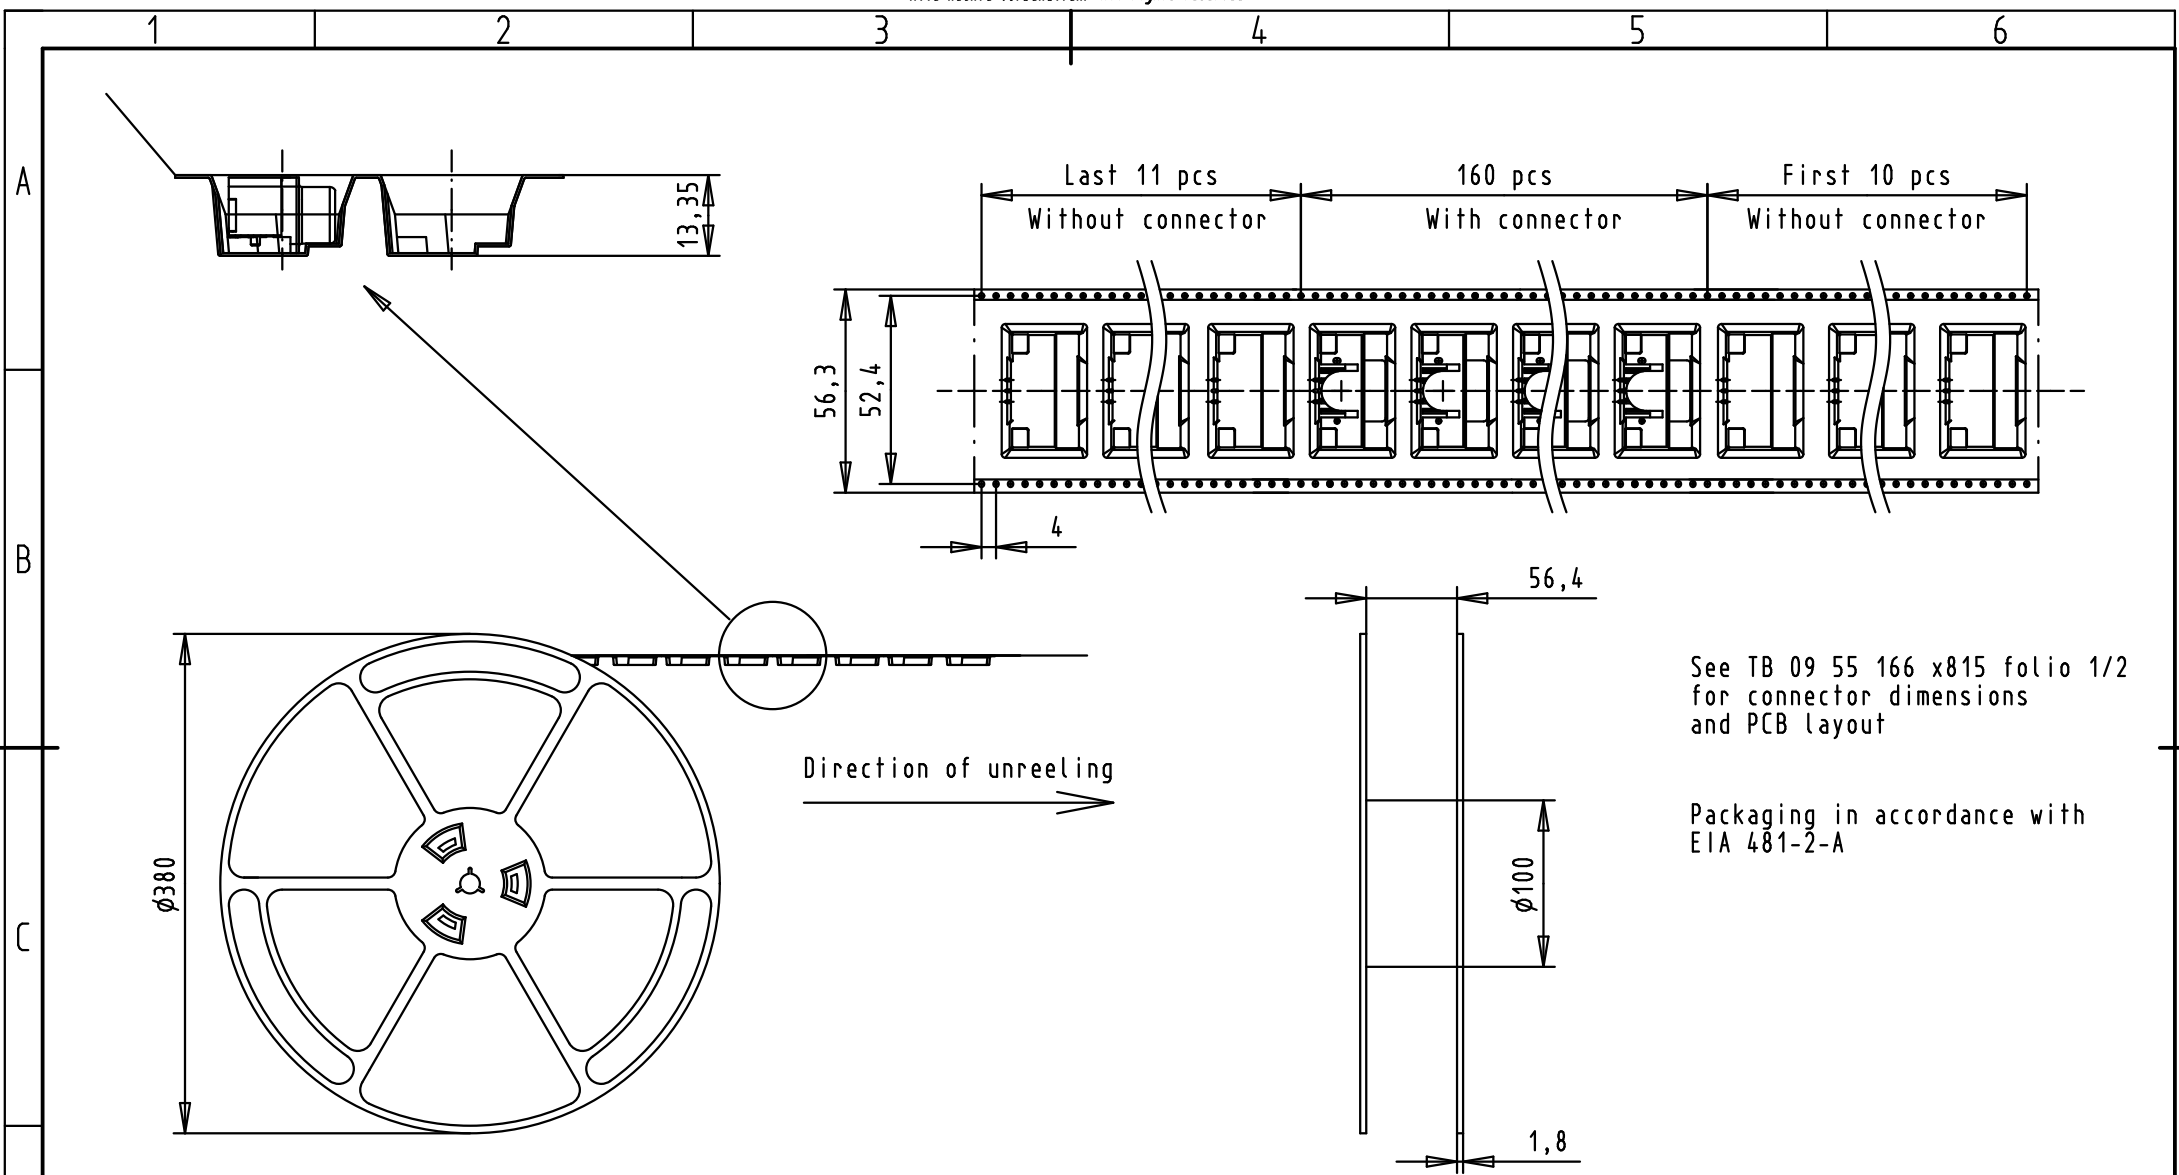

See TB 09 55 166 x815 folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

09551663815.741	1	M3	Black Insulator	Reel Packaging (160 connectors)
09551666815.741	2			
09551667815.741	3			
Part number	PL	Thread	Index designation	

			Dot.	Name
			Detail.	13Jul2007 ED
EC01215	14Jan2010	ED	Insp.	
EC01118	26Nov2009	LP	Stand.	
34407	31Aug2007	ED		
34377	13Jul2007	ED		
Mod.	Dot.	Name	HARTING EURL F-95972 Paris	

All Dim. in mm
Orig. Size DIN A 4

D-SUB SMT
Low Profile Male 9p
with die casted grounds
and M3 nuts

TB 09 55 166 x815

Sub.