

# Data Sheet

## SP044xxVBNN

Page 1/5


P/N

ASP044xx

xx=number of poles

2017/05/05

### Illustration

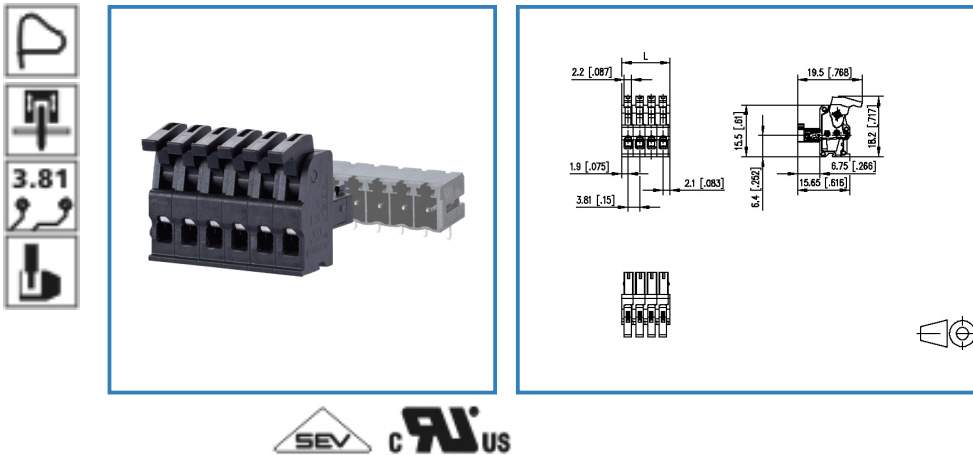

see enlarged drawing at the end of the document

### Product specification

- spring clamp terminal block, pluggable
- centerline 3.81 mm, direction of connection vertical 0°
- color black
- eccentric lever, wire entry uncodeable side parallel to plug direction

# Data Sheet

## SP044xxVBNN

### Technical Data



#### General Data

min. number of poles	2		
max. number of poles	12		
Insulating material class	CTI 400		
clearance/creepage dist.	2.6 mm		
protection category	IP 20		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	32.0 V	200.0 V	200.0 V
Rated test voltage	1.5 kV	1.5 kV	1.5 kV

#### Connection data

Rated wiring solid wire	0.08 - 1.5 mm <sup>2</sup> / AWG 28 - 16
Rated wiring stranded wire	0.08 - 1.5 mm <sup>2</sup> / AWG 28 - 16

#### Approvals

 V / A	150 / 10
	10 A / 130 V / 2.5 kV / 3 / IEC 61984 / 0.08 - 1.5 mm <sup>2</sup>

#### Material

insulating material	PA46
flammability class	V0
spring material	Spring steel
contact material	CuSn
Glow-Wire Flammability GWFI	-
Glow-Wire Flammability GWIT	-
contact surface	Sn

#### Climatic properties

upper limit temperature	105 °C
lower limit temperature	-40 °C

#### General

Tolerance	ISO 2768 -mH
-----------	--------------



# Data Sheet

## SP044xxVBNN



# Data Sheet

## SP044xxVBNN

Page 4/5

P/N

ASP044xx

xx=number of poles

2017/05/05

### Matching Part

P/N	Product name
311901	PR044xxHBBN Typ 190
311911	PR044xxVBBN Typ 191

### Accessories

P/N	Product name
700025-01-9	700025




# Data Sheet

## SP044xxVBNN

### Illustration

Drawing

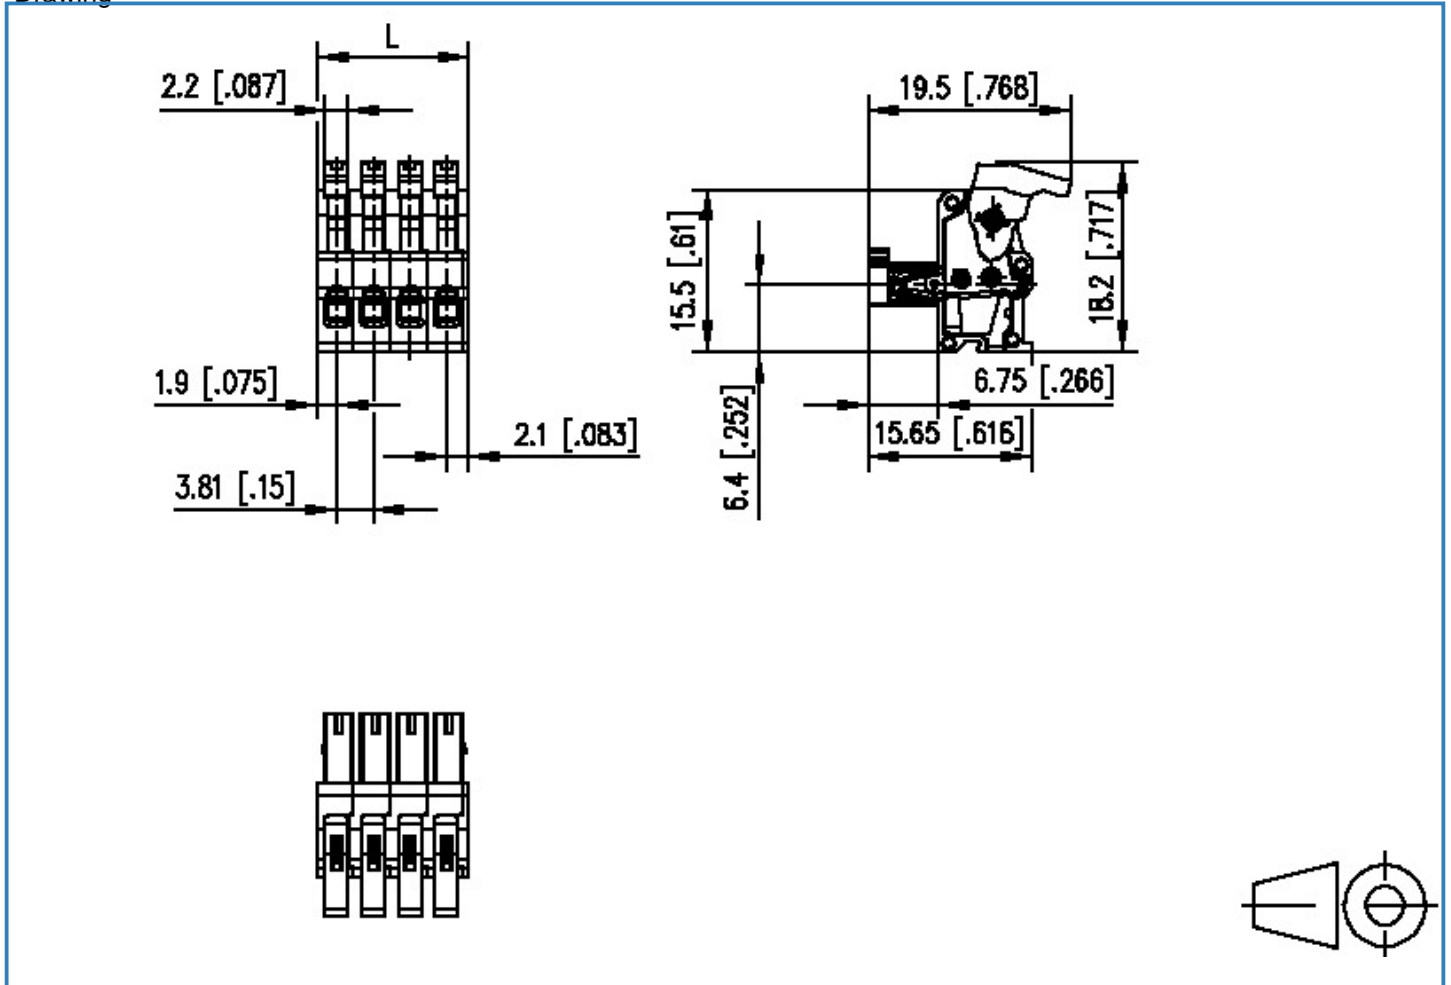

$$L = (\text{pole size} - 1) \times \text{centerline} + 4 [0.157]$$

