


C-170733

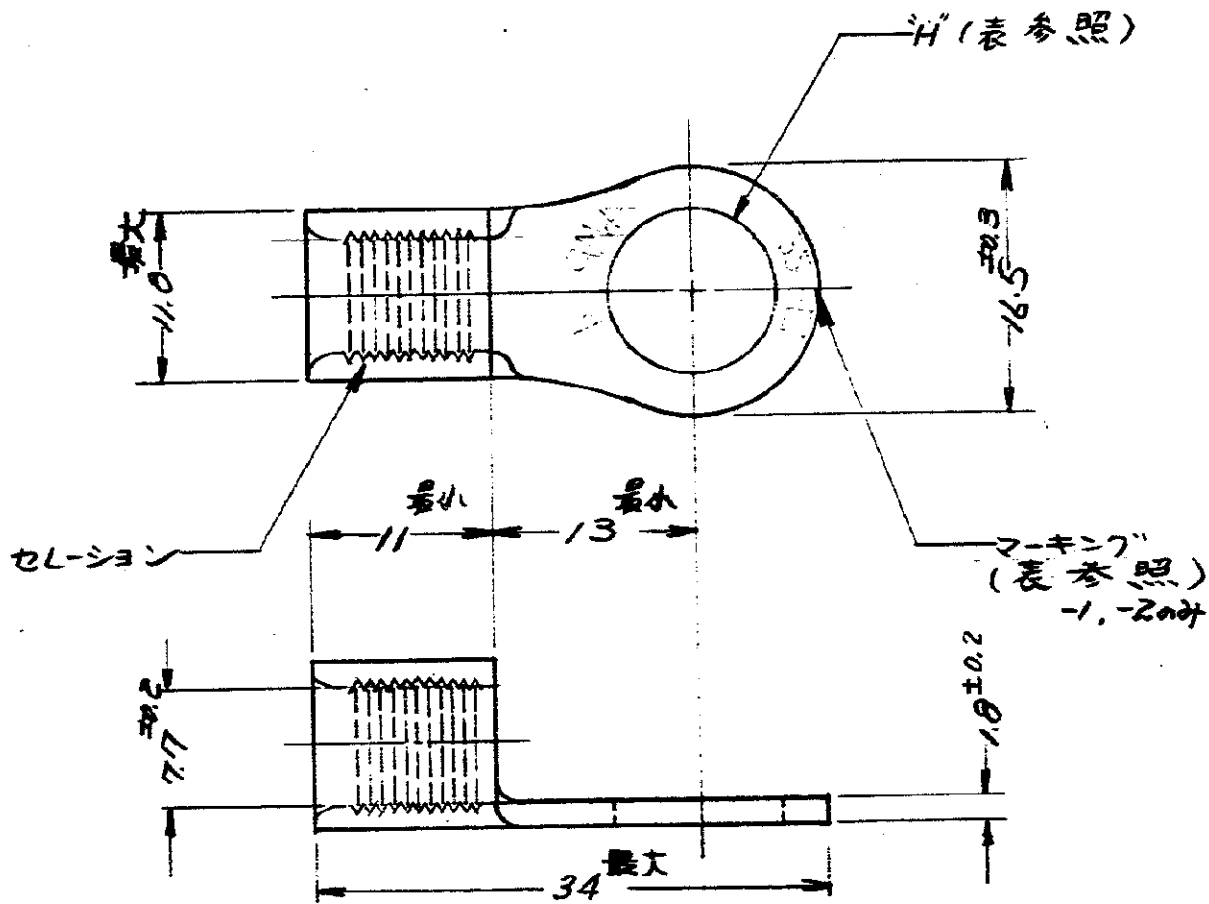

型番	スタッド	H ± 0.25	マキング
C-170733-1	6MM	6.6	22-6
C-170733-2	8MM	8.6	22-8
C-170733-3	10MM	10.7	

G2	DELETE MARK	3/17/70	49
G1	REVISED (REV. A)	4/9/70	47
G	REVISED (REV. A)	S.O	4/16/70
F1	ADD	T.T	4/16/70
F	REVISED (REV. A)	Z.K	4/16/70
E	REVISED (REV. A)	Y.I	4/17/70
D	REVISED (REV. A)	Y.M	4/23/70
C	ADD JIS MARK	Y.K	4/24/70
B	REVISED (REV. A)	Y.K	4/24/70
A	DELETE MARK	Y.K	4/10/70
O	RELEASED (REV. O)	Y.K	4/10/70
LTR	変更 REVISION RECORD	DR.	CHK. DATE
DR.	Y. Kobayashi	3/13/70	3/13/70
DE.	Y. Irie	3/13/70	3/13/70
CHK.	Y. Nakamoto	3/13/70	3/13/70

AMP JAPAN, LTD. ALL RIGHTS RESERVED AMP PRODUCTS COVERED BY PATENTS AND OR PATENTS PENDING

参考図面  
CUSTOMER COPY  
REFERENCE ONLY

MATERIAL 電気鋼

FINISH 焼付

WIRE RANGE 1.27-2.14 mm AWG #4

INSULATION DIA. 0.1 IN

ソリストラッド

TRADE MARK

AMP

日本エー・イー・ピー株式会社  
TOKYO, JAPAN

公差 TOLERANCE EXCEPT AS NOTED

SCALE 2-1

LOC SIZE 4

REV. NO. JA C-170733

REV. 5

品名 丸型端子