

THIS DRAWING IS UNPUBLISHED. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC: CM 00 DIST: P LTR J ECO-07-012876 REVISIONS: DESCRIPTION DATE DIM APD KW DB

| NO. | DESCRIPTION | DATE | DIM | APD | KW | DB |
|-------|-------------|------|------------|-----|----|----|
| 95.10 | [3.744] | 24 | 5-641231-4 | | | |
| 91.14 | [3.588] | 23 | 5-641231-3 | | | |
| 87.17 | [3.432] | 22 | 5-641231-2 | | | |
| 83.21 | [3.276] | 21 | 5-641231-1 | | | |
| 79.25 | [3.120] | 20 | 5-641231-0 | | | |
| 75.29 | [2.964] | 19 | 4-641231-9 | | | |
| 71.32 | [2.808] | 18 | 4-641231-8 | | | |
| 67.36 | [2.652] | 17 | 4-641231-7 | | | |
| 63.40 | [2.496] | 16 | 4-641231-6 | | | |
| 59.44 | [2.340] | 15 | 4-641231-5 | | | |
| 55.47 | [2.184] | 14 | 4-641231-4 | | | |
| 51.51 | [2.028] | 13 | 4-641231-3 | | | |
| 47.55 | [1.872] | 12 | 4-641231-2 | | | |
| 43.59 | [1.716] | 11 | 4-641231-1 | | | |
| 39.62 | [1.560] | 10 | 4-641231-0 | | | |
| 35.66 | [1.404] | 9 | 3-641231-9 | | | |
| 31.70 | [1.248] | 8 | 3-641231-8 | | | |
| 27.74 | [1.092] | 7 | 3-641231-7 | | | |
| 23.77 | [.936] | 6 | 3-641231-6 | | | |
| 19.81 | [.780] | 5 | 3-641231-5 | | | |
| 15.85 | [.624] | 4 | 3-641231-4 | | | |
| 11.89 | [.468] | 3 | 3-641231-3 | | | |
| 7.92 | [.312] | 2 | 3-641231-2 | | | |
| 95.10 | [3.744] | 24 | 2-641231-4 | | | |
| 91.14 | [3.588] | 23 | 2-641231-3 | | | |
| 87.17 | [3.432] | 22 | 2-641231-2 | | | |
| 83.21 | [3.276] | 21 | 2-641231-1 | | | |
| 79.25 | [3.120] | 20 | 2-641231-0 | | | |
| 75.29 | [2.964] | 19 | 1-641231-9 | | | |
| 71.32 | [2.808] | 18 | 1-641231-8 | | | |
| 67.36 | [2.652] | 17 | 1-641231-7 | | | |
| 63.40 | [2.496] | 16 | 1-641231-6 | | | |
| 59.44 | [2.340] | 15 | 1-641231-5 | | | |
| 55.47 | [2.184] | 14 | 1-641231-4 | | | |
| 51.51 | [2.028] | 13 | 1-641231-3 | | | |
| 47.55 | [1.872] | 12 | 1-641231-2 | | | |
| 43.59 | [1.716] | 11 | 1-641231-1 | | | |
| 39.62 | [1.560] | 10 | 1-641231-0 | | | |
| 35.66 | [1.404] | 9 | 641231-9 | | | |
| 31.70 | [1.248] | 8 | 641231-8 | | | |
| 27.74 | [1.092] | 7 | 641231-7 | | | |
| 23.77 | [.936] | 6 | 641231-6 | | | |
| 19.81 | [.780] | 5 | 641231-5 | | | |
| 15.85 | [.624] | 4 | 641231-4 | | | |
| 11.89 | [.468] | 3 | 641231-3 | | | |
| 7.92 | [.312] | 2 | 641231-2 | | | |

THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISED: 12 MAR 96

BY: B. LEWIS

CHK: SWING

DATE: 12 MAR 96

APP: D. CLARK

PRODUCT SPEC: 108-1051

APPLICATION SPEC: 114-1020

WEIGHT: -

SCALE: 4:1

SHEET: 1 OF 1

CUSTOMER DRAWING

THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISED: 12 MAR 96

BY: B. LEWIS

CHK: SWING

DATE: 12 MAR 96

APP: D. CLARK

PRODUCT SPEC: 108-1051

APPLICATION SPEC: 114-1020

WEIGHT: -

SCALE: 4:1

SHEET: 1 OF 1

CUSTOMER DRAWING

THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISED: 12 MAR 96

BY: B. LEWIS

CHK: SWING

DATE: 12 MAR 96

APP: D. CLARK

PRODUCT SPEC: 108-1051

APPLICATION SPEC: 114-1020

WEIGHT: -

SCALE: 4:1

SHEET: 1 OF 1

CUSTOMER DRAWING

THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISED: 12 MAR 96

BY: B. LEWIS

CHK: SWING

DATE: 12 MAR 96

APP: D. CLARK

PRODUCT SPEC: 108-1051



APPLICATION SPEC: 114-1020

WEIGHT: -

SCALE: 4:1

SHEET: 1 OF 1

CUSTOMER DRAWING

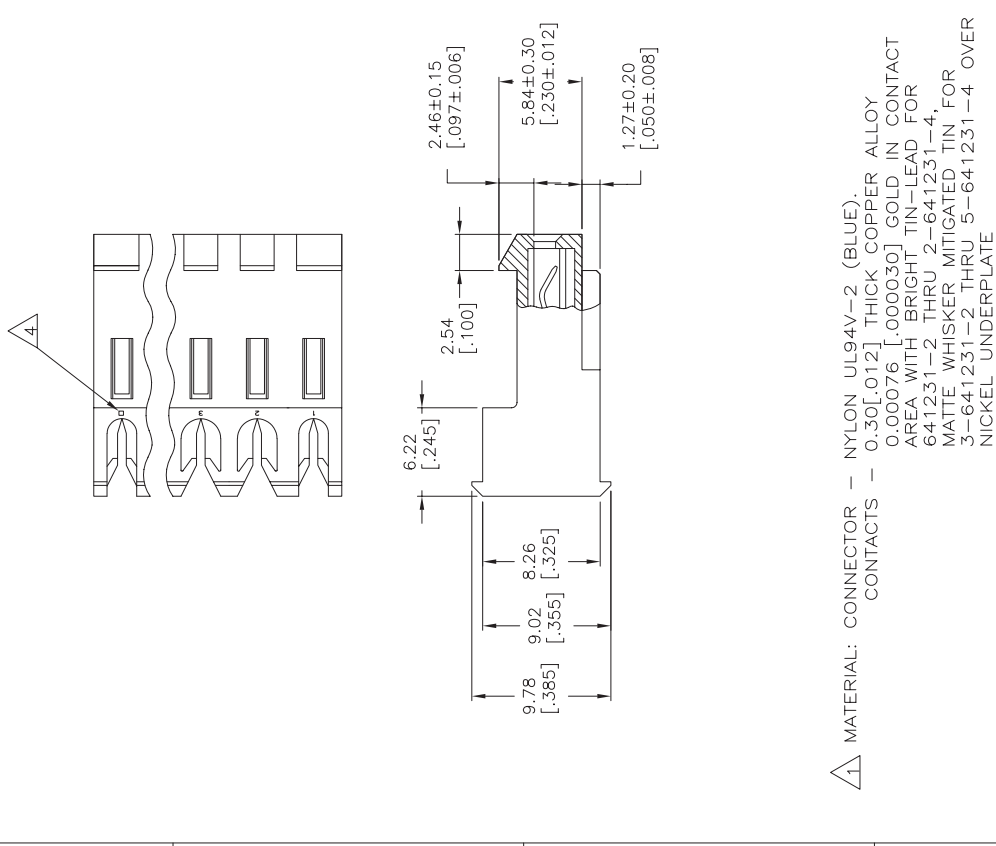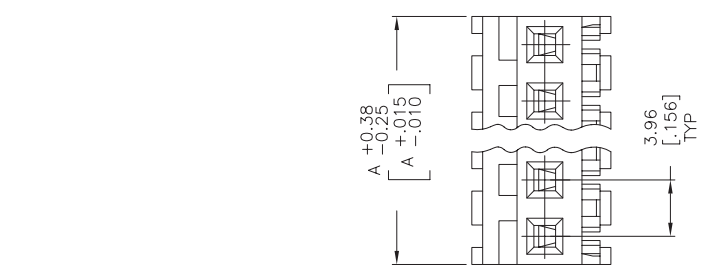

1. MATERIAL: CONNECTOR - NYLON UL94V-2 (BLUE).
 CONTACTS - 0.30[.012] THICK COPPER ALLOY
 0.00076 [.000030] GOLD IN CONTACT
 AREA WITH BRIGHT TIN-LEAD FOR
 641231-2 THRU 2-641231-4,
 MATTE WHISKER MITIGATED TIN FOR
 3-641231-2 THRU 5-641231-4 OVER
 NICKEL UNDERPLATE
2. CONTACTS ACCEPT .26 AWG WIRE WITH 2.41[.095] MAX
 INSULATION DIAMETER.
3. CONTACTS MUST ACCEPT 1.14±.03 [.045±.001] SQUARE
 POST AND REMAIN LOCKED IN POSITION.
4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY
 NOT APPEAR ON ALL ASSEMBLIES.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
6. HOUSING FEATURES ARE: FEED-THRU WITH LOCKING
 RAMP.

