


Hole in P.C.B $\varnothing 3,2$
P.C.B Thickness 1.6

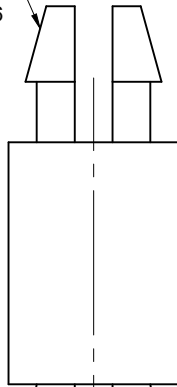


3.6 ± 0.2


L

3.8 ± 0.2


Hole in P.C.B $\varnothing 3,2$
P.C.B Thickness 1.6



| Order Code | L (mm) |
|------------|----------|
| 701510500 | 3.2±0,2 |
| 701511000 | 4.8±0,2 |
| 701511500 | 6.4±0,3 |
| 701512000 | 7.9±0,3 |
| 701512300 | 8.6±0,3 |
| 701512500 | 9.5±0,3 |
| 701513000 | 11.1±0,3 |
| 701513500 | 12.7±0,3 |
| 701514000 | 14.3±0,3 |
| 701514500 | 15.9±0,3 |
| 701515000 | 17.5±0,3 |
| 701515500 | 19.1±0,3 |
| 701516000 | 20.6±0,4 |
| 701516500 | 22.2±0,4 |
| 701517000 | 25.4±0,4 |
| 701517400 | 27.0±0,4 |
| 701517500 | 28.6±0,4 |
| 701518000 | 31.7±0,4 |
| 701518500 | 34.9±0,4 |
| 701519000 | 38.1±0,4 |



$\varnothing 4,5 \pm 0,2$

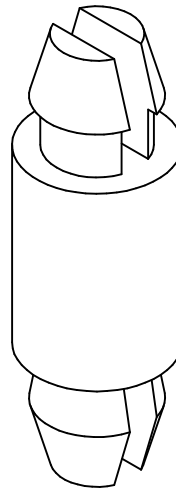

Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions

Max-Eyth-Str. 1
74638 Waldenburg
Germany
Tel. +49 79 42 945 - 0

www.we-online.com
eiSos@we-online.com



CREATED
D. Fandrey

CHECKED
S. Klingler

PROJECTION
METHOD



SCALE
4:1

DESCRIPTION

AsSNSN
Snap-on keyslot spacer arresting
on both sides

MATERIAL
Nylon 66 UL94-V2

GENERAL TOLERANCE
DIN ISO 2768 T1m

ORDER CODE
70151xxxx

WEIGHT STATUS
Released

REV DATE
1.1 2016-06-29

PAGE
DE 1 / 1