


# D-UFB-IB-S-RBO

Order No.: 2748360



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2748360>

Attachment plug with surge protection for 2-conductor remote bus output. Connection: D-SUB 9 female connector - male connector with ca. 20 cm conductor, snap-on foot for mounting on NS 32 or NS 35/7.5

Commercial data	
GTIN (EAN)	 4 017918 062514
Note	Made-to-order
sales group	J400
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 131 (TT-2007)

### Product notes

WEEE/RoHS-compliant since:  
08/17/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General	
Housing material	Aluminum
Color	black

Standards for air and creepage distances	VDE 0110-1
	IEC 60664-1: 1992-10
Total surge current (8/20) $\mu$ s	1.5 kA
Ambient temperature (operation)	-40 °C ... 80 °C
Mounting type	DIN rail: 35 mm
Design	Attachment plug for DIN rail mounting
Degree of protection	IP10
Direction of action	Line-Line & Line-Earth Ground
Width	16.50 mm
Height	70.00 mm
Length	112.80 mm

#### Protective circuit

IEC category	C1
	C3
VDE requirement class	C1
	C3
Nominal voltage $U_N$	5 V DC
Maximum continuous operating voltage $U_C$	5.8 V DC
Maximum continuous voltage $U_C$ (wire-wire)	5.8 V DC
Maximum continuous voltage $U_C$ (wire-ground)	5.8 V DC
Nominal current $I_N$	300 mA (25°C)
Operating effective current $I_C$ at $U_C$	$\leq 300 \mu$ A
Ground conductor current $I_{PE}$	$\leq 300 \mu$ A
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Core)	350 A
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Earth)	350 A
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-GND)	350 A
Total surge current (8/20) $\mu$ s	1.5 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu$ s maximum (Core-Earth)	350 A
Output voltage limitation at 1 kV/ $\mu$ s (Core-Core) spike	$\leq 35$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) spike	$\leq 35$ V

Output voltage limitation at 1 kV/ $\mu$ s (Core-Core) static	$\leq 12$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) static	$\leq 12$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-GND) static	$\leq 12$ V
Residual voltage at $I_n$ , (conductor-conductor)	$\leq 30$ V
Residual voltage at $I_n$ , (conductor-ground)	$\leq 30$ V
Residual voltage at $I_n$ , (conductor-GND)	$\leq 30$ V
Protection level $U_p$ (Core-Core)	$\leq 35$ V
Protection level $U_p$ (Core-Earth)	$\leq 35$ V
Response time $t_A$ (Core-Core)	$\leq 500$ ns
Response time $t_A$ (Core-Earth)	$\leq 500$ ns
	$\leq 500$ ns
Input attenuation aE, sym.	0.1 dB ( $\leq 7$ MHz)
	0.1 dB ( $\leq 8.5$ MHz)
	0.1 dB (up to 2.5 MHz 600 Ohm $\Omega$ )
Cut-off frequency $f_g$ (3 dB), sym. in 50 Ohm system	Typ. 100 MHz
Cut-off frequency $f_g$ (3 dB), sym. in 150 Ohm system	$> 100$ MHz
Cut-off frequency $f_g$ (3 dB), sym. in 600 Ohm system	Typ. 30 MHz
Capacity (Core-Core)	50 pF
Capacity (Core-GND)	50 pF
Capacity (Core-Earth)	50 pF
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C1 (500 V / 250 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C1 (500 A/250 A)

**Connection data**

Type of connection	D-SUB-9
Connection type IN	D-SUB-9 socket
Connection type OUT	D-SUB-9 connector
Connection method	Remote bus output

**Connection, protective circuit**

Standards/regulations	IEC 61643-21
-----------------------	--------------

**Certificates / Approvals**




Certification

GOST


---

**Diagrams/Drawings**

Dimensioned drawing

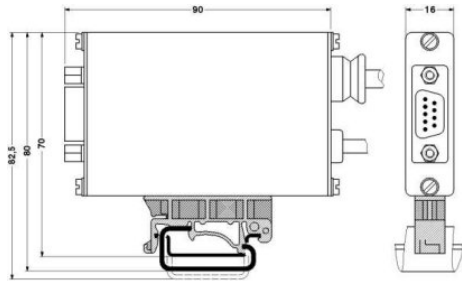

Circuit diagram

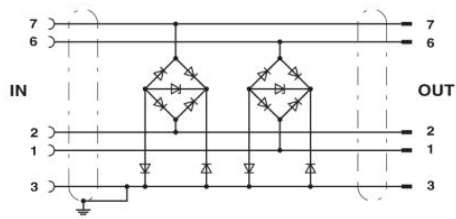

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;