


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	1307.26	A	INITIAL RELEASE.	Andrew

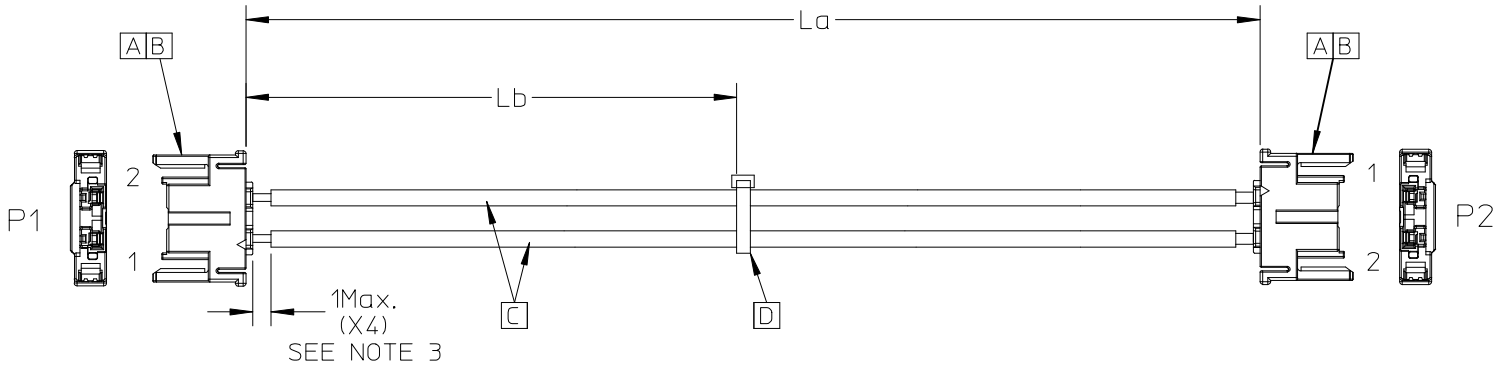

JOB NO.	La(mm)	Lb(mm)	DESCRIPTION
688014593	46+3/0	---	fleximate to fleximate 46mm
688014594	115+5/0	---	fleximate to fleximate 115mm
688014595	190+5/0	90±5	fleximate to fleximate 190mm

SEE NOTE 4
SEE NOTE 4

- NOTES
1. THIS PRODUCT MUST MEET EU 2002/95 EC ROHS COMPLIANCE.
 2. ELECTRICAL PERFORMANCE REFER TO ES-000.
 3. THE INNER INSULATION EXPOSED LENGTH.
 4. 688014593 AND 688014594 DO NOT NEED THE CABLE TIE.
 5. STICK UL LABEL ON THE OUTSIDE CARTON.

D	CABLE TIE		1
C	WIRE UL11047 24AWG DOUBLE INSULATION WHITE	A/R	
B	TERMINAL 24AWG		4
A	HSG 2CKT WHITE		2
ITEM	DESCRIPTION	L(MM)	Q'TY

P1	P2	WIRE COLOR
1	2	WHITE
2	1	WHITE

EC NO: CPG2014-0268 DRWN: JXIA004 CHKD: YXZOU APPR: FNIE	2013/07/27 2013/07/27 2013/07/29	QUALITY SYMBOLS $\nabla_F = 0$ $\nabla_E = 0$ $\nabla_P = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
					DRAWN BY JXIA004	DATE 2013/07/27	TITLE FLEXIMATE TO FLEXIMATE		
					CHECKED BY YXZOU	DATE 2013/07/27			
					APPROVED BY FNIE	DATE 2013/07/29			
		ANGULAR ±---°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
A		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE 1		SD-68801-105		1 OF 1	
				SIZE A 4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

