


ENERGIZER L522MJ

9V



Industry Standard Dimensions

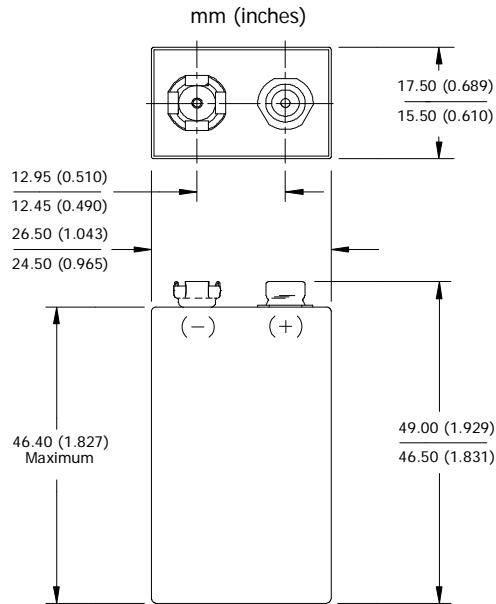



This Battery has Underwriters Laboratories component Recognition

Specifications



|                            |  |
|----------------------------|--|
| <b>Classification:</b>     | Lithium 9V   |
| <b>Chemical System:</b>    | Lithium-Manganese Dioxide (Li/MnO <sub>2</sub> )   |
| <b>Designation:</b>        | ANSI-1604LC  |
| <b>Nominal Voltage:</b>    | 9.0 volts  |
| <b>Operating Temp:</b>     | -40°C to 60°C (-40°F to 140°F)   |
| <b>Storage Temp:</b>       | -40°C to 60°C (-40°F to 140°F)   |
| <b>Max Discharge :</b>     | 120 mA continuous *  |
| <b>Typical Weight:</b>     | 36.4 grams (1.3 oz.)   |
| <b>Typical Volume:</b>     | 21.4 cubic centimeters (1.3 cubic inch)  |
| <b>Jacket:</b>             | Metal  |
| <b>Terminal:</b>           | Miniature Snap   |
| <b>Typical Li Content:</b> | 1.35 grams (0.048 oz.)   |
| <b>UL Listed:</b>          | MH12454  |
| <b>Applications:</b>       | This battery best suited for long and short term applications.<br>For complete details, please reference:<br>Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations<br>United States: 49 CFR 173.185 |
| <b>Shipping:</b>           |  |

\* Discharging above 120 milliamps (mA) may activate the built-in safety mechanism. This can permanently affect battery performance.

Typical Discharge Performance (21°C)

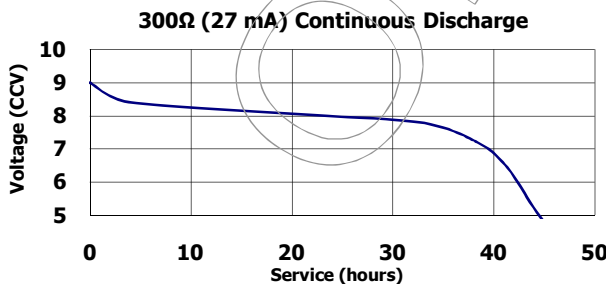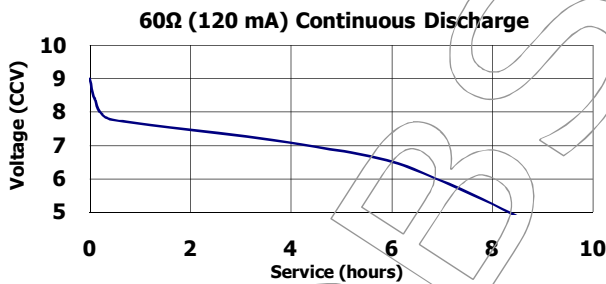

Milliamp-Hours Performance (21°C)

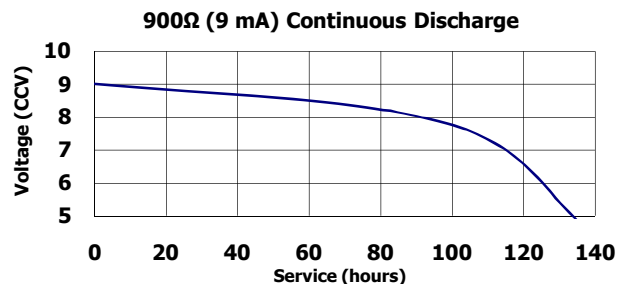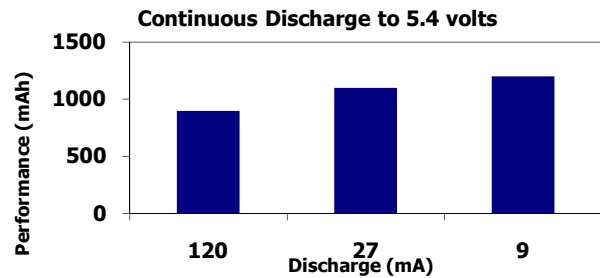

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.