


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
IJ	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A3		ECR-12-018621	25OCT12	SS	HMR

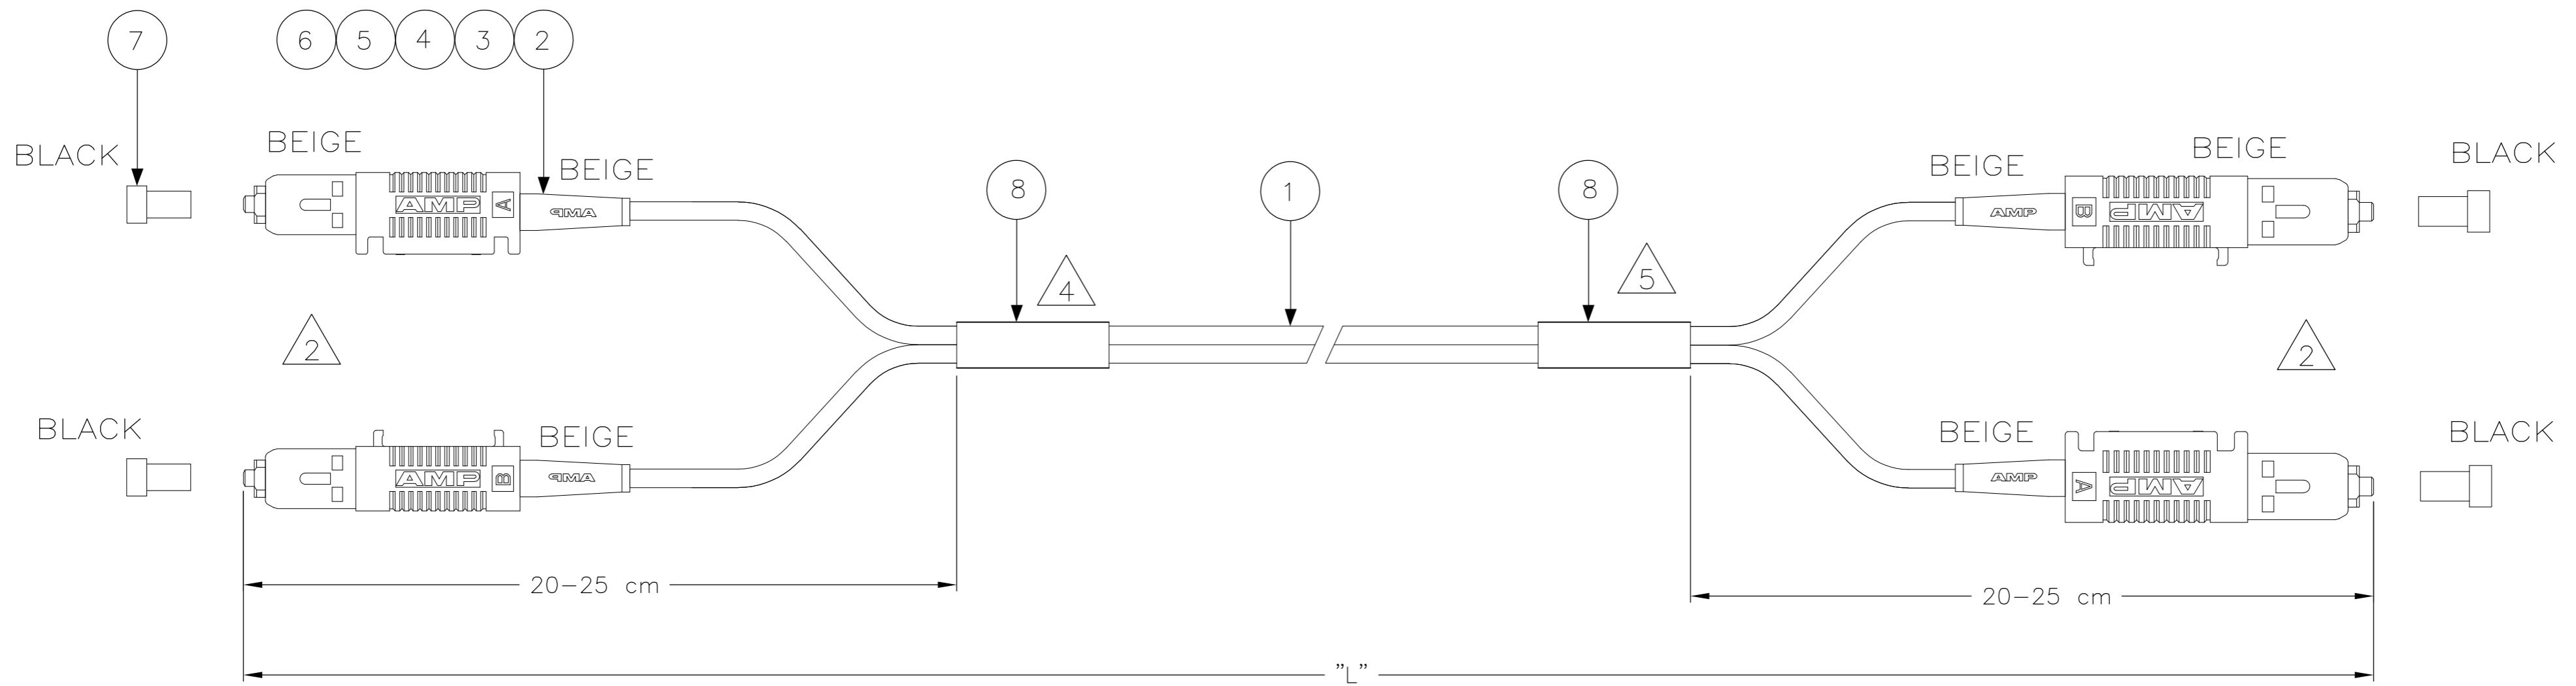

NOTES:

1 ATTENUATION $\leq 0,3$ dB, MEASURED AT 1300nm OR 850nm ACC.
 IEC 61300-3-4 INSERTION METHOD B WITH MODAL CONDITION
 ACC. TO IS14763-3 OFSTP-14, IEC 61230-4-1.

2 INDIVIDUAL LENGTH DIFFERENCE ON BOTH SIDES ≤ 5 mm

3 SUPPLY FILLED OUT TEST RESULT SHEET WITH EACH INDIVIDUALLY PACKED ASSEMBLY

4 DAT LABEL INFO:
 - UNIQUE SERIAL NUMBER
 - TE LOGO PN
 - MANUFACTURING LOCN.

5 BLANK LABEL

6 NON CROSS OVER AS PER BELOW TABLE

LEFT CONN.	RIGHT CONN.
SC CONN. A	SC CONN. B
SC CONN. B	SC CONN. A

7 CABLE INFO:

CORE DIA - 50/125 μ m
 OUTER DIA - 2,5 mm
 JACKET COLOR - ORANGE
 JACKET MATERIAL - LSZH

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (Meter)
X-5349565-Y	XY,0
9-5349565-1	1,5
9-5349565-9	9,5
9-5349565-0	100 -0/+3,0

2	-	FOAC DAT-85 LABEL ON REEL	8
4	-	PROTECTIVE COVER, 2.5MM, BLACK	7
2	-	SC DUPLEX HOUSING, BEAM HALF	6
2	-	SC DUPLEX HOUSING, RET. PLATE HALF	5
4	-	SC CERAMIC, OVERMOLDED	4
4	-	CRIMP EYELET, SC, 2.0MM PLATED	3
4	-	FOAC STRAIN RELIEF, SC/FC BEIGE	2
L	-	FOCAB 2.5 50/125 DUPLEX ORANGE	1
Qty	Part Number	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 13 SEP 05 GIRIYAPPA M		
DIMENSIONS: mm		CHK 13 SEP 05 DIWAKAR BELAVADI		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 13 SEP 05 DIWAKAR BELAVADI	NAME	
0 PLC $\pm -$		PRODUCT SPEC		
1 PLC $\pm -$		APPLICATION SPEC		
2 PLC $\pm -$		WEIGHT		
3 PLC $\pm -$		SCALE		
4 PLC $\pm -$		SHEET		
ANGLES $\pm -$		REV		
FINISH		CUSTOMER DRAWING		