

Shock-Safe Fuseholder, 6.3 x 32 mm, Fingergrip, Rear-Side, grau or black



250 VAC · 2.5W/10A



GAM T1 NNO

### Description

- IP 67 from Front-Side
- Screw type fuse carrier

### References

We recommend for new applications the type 23312P  
Last order date: 31.12.2013


### Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

Fuse-Link	6.3 x 32mm	Soldering Methods	Iron
Mounting	Panel Mount, Rear Side	Contact Resistance	< mΩ at 20 mV
Mounting	Fixing Nut	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Terminal	Solder	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated Voltage	250VAC	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Rated current	10A	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23 °C	Dump Heat	acc. to NF C 20-604
Degree of Protection	IP 67	Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Ambient Air Temp.	-40 °C to 85 °C	Admissible Torque on Fixing Nut	max 1.2Nm
Climatic Category	40/085/21 acc. to IEC 60068-1	Panel Thickness s	max 4mm
Material: Socket	Thermoset, Nature		
Material: Cap	Thermoplastic, Nature		
Unit Weight	23 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Type, Rated voltage, Rated current		

### Dimension

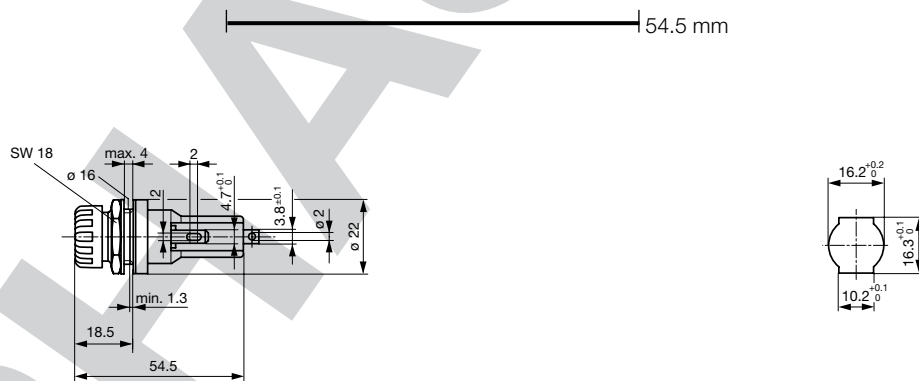

Mounting holes

### All Variants

Holder	Cap	Degree of Protection	Colour Holder	Colour Cap	Reference	Order Number
●	Fingergrip	IP 67	grey	Light-Grey	23463P	7092.6150
●	Fingergrip	IP 67	black	black	23463NJP	7092.6160

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

---

**Packaging Unit**    Bulk (100 pcs.)

---

PHASE-OUT

04.12.2014