



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
3	RE-F-06522	J. M. H.		99.9.7					

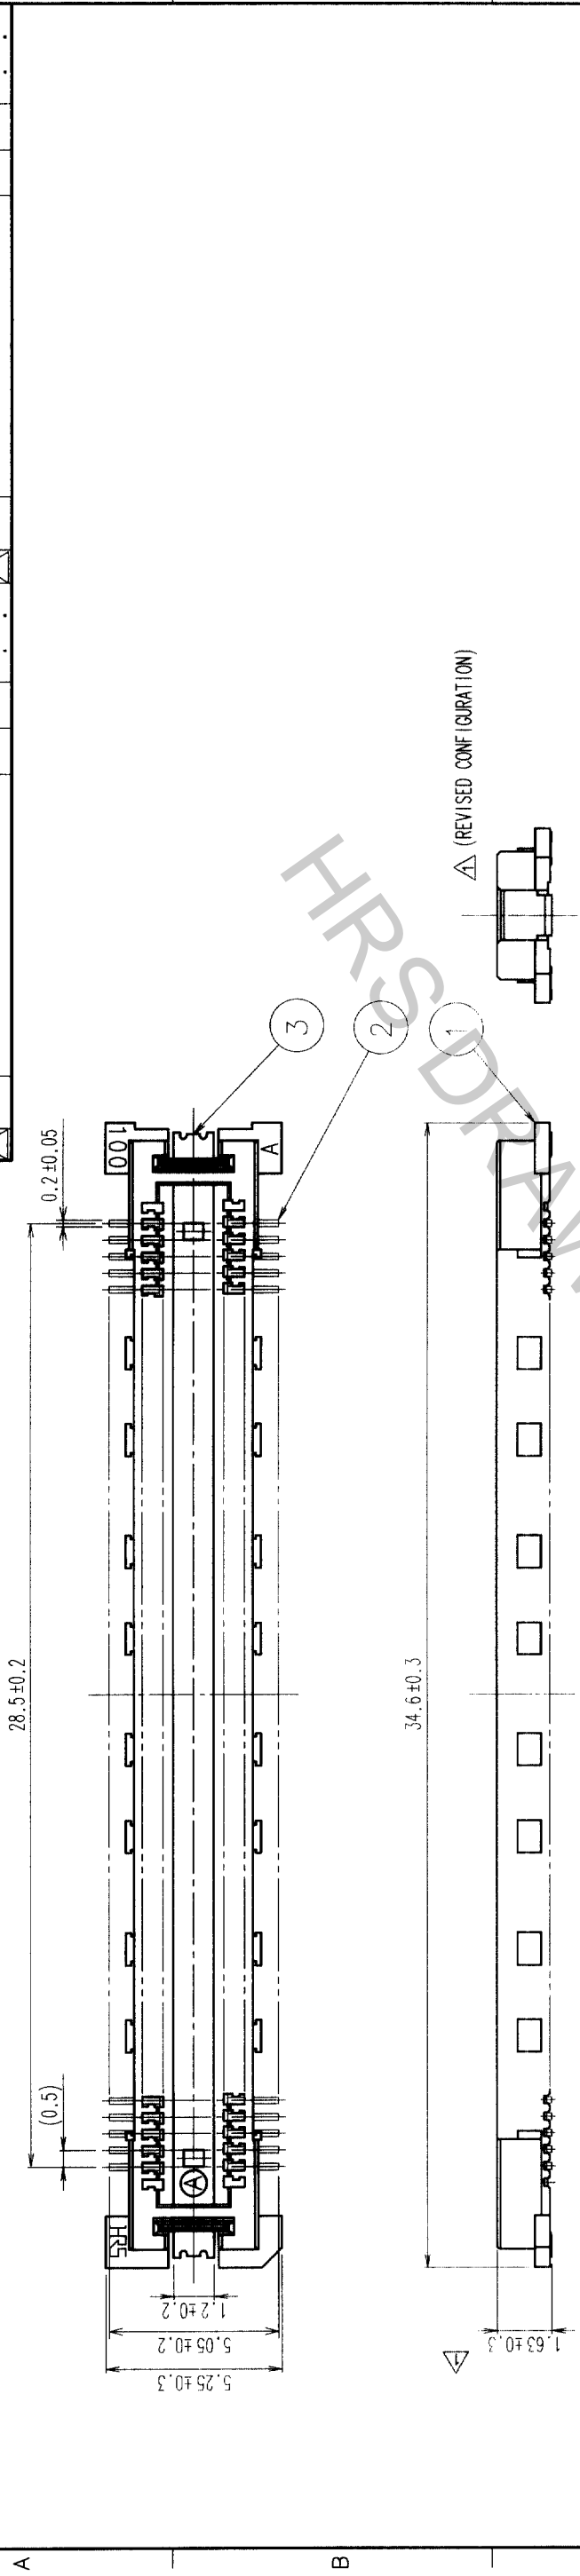

RECOMMENDED LAND PATTERN DIMENSION OF PCB

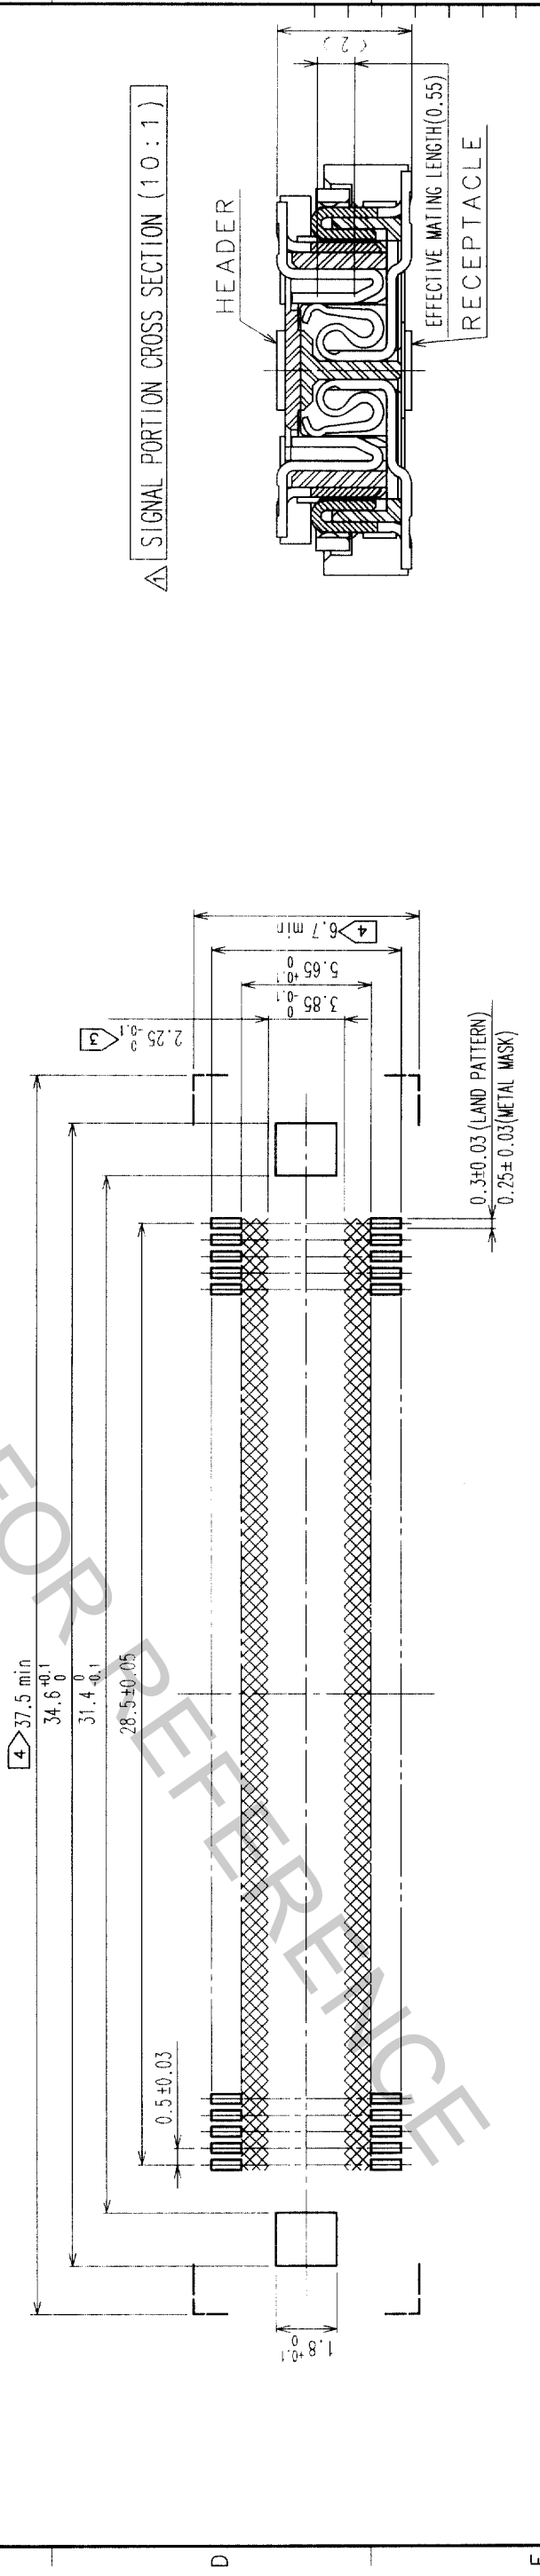

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
  - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
  - 4 DO NOT MOUNT OTHER DEVICES ONTO [ ] AREA, OR MATING PAIR CANNOT BE MATED.

NO.	MATERIAL	FINISH, REMARKS	NO.	PHOSPHOR BRONZE	TIN PLATED	FINISH, REMARKS
2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL				
1	LCP	BEIGE	UL94V-0	3		

CODE NO. (OLD)	DESIGNED	CHECKED	APPROVED	RELEASED
CL	S. Kitajima	J. Matsukawa	M. Ishida	Y. Yoshimura
	990525	990525	990526	990527

DRAWING NO.	EDC3-152106	PART NO.	FX11LB-116P-SV
SCALE	5:1	CODE NO.	CL573-0054-0
UNITS	mm		

TO PCK