
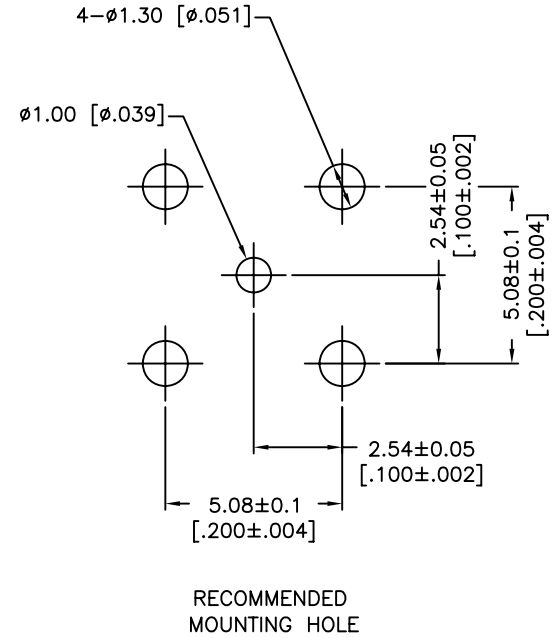


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/19/10	XXXXXX	INITIAL RELEASE

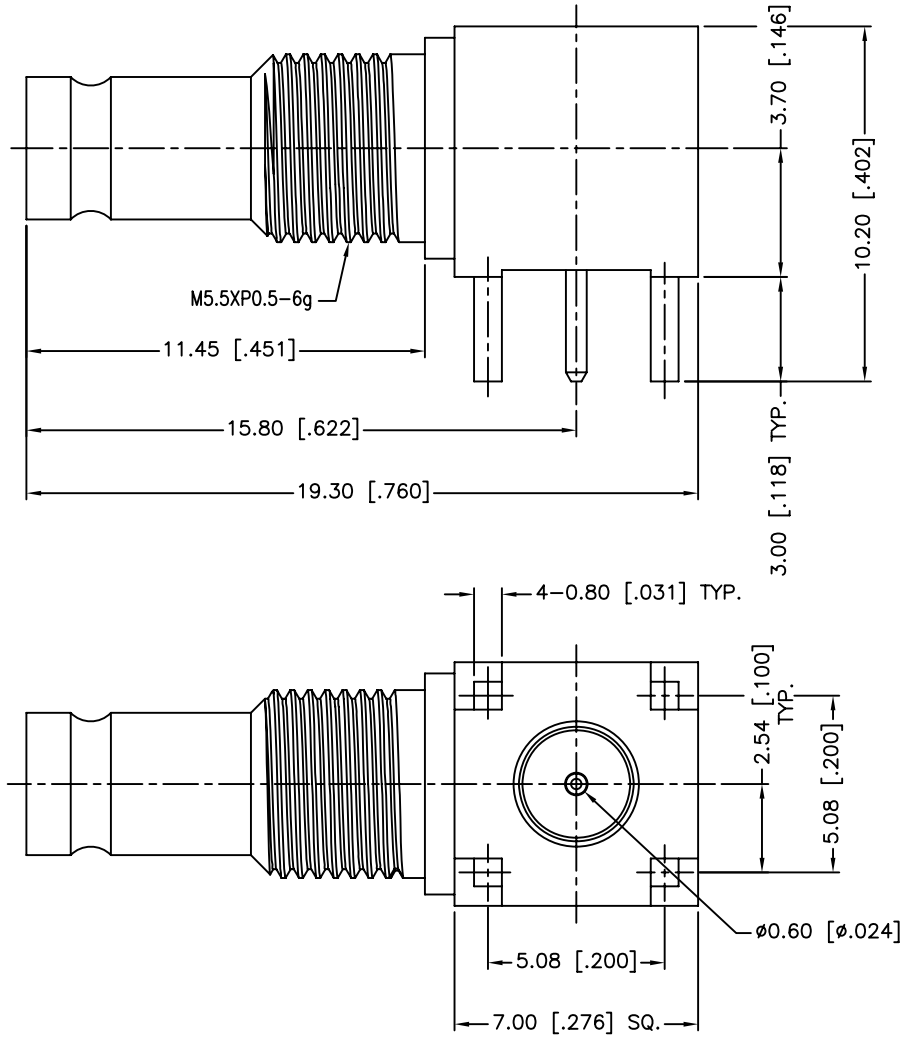

1. FREQUENCY RANGE: DC 0-3 GHz
2. VSWR(RETURN LOSS): 1.15, MAX.

DESCRIPTION	MATERIAL	FINISH	QTY
6 COVER	BRASS	GOLD	1
5 CONTACT PIN	BRASS	GOLD	1
4 INSULATOR	PTFE	NATURAL	1
3 INSULATOR	PTFE	NATURAL	1
2 CONTACT PIN	BER. COPPER	GOLD	1
1 BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		DRAWN M.ZHANG	03/19/10
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		CHECKED	
DO NOT SCALE DRAWING		ISSUED	
		SHEET 1 OF 1	
		CAD FILE C:/CONNEX/282100-75.DWG	

Amphenol Connex

PART DESCRIPTION			
1.0/2.3 R/A BULKHEAD PCB RECEPT. JACK (75 ohm)			
PART NO.		282100-75	
DWG. NO.	REV.	SIZE	SCALE
282100-75.DWG	D	A	NA