

	工	G	нт. П	т	D	0



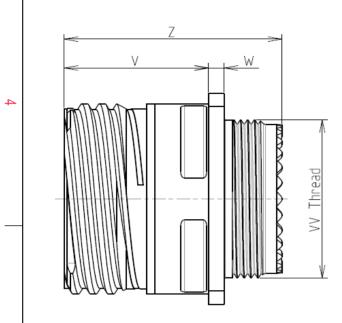

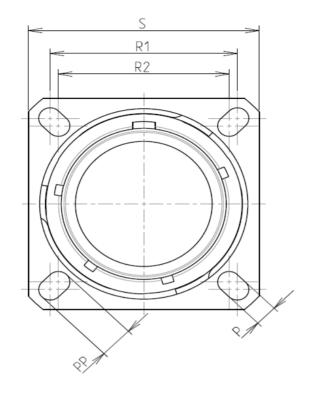

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

: 11.83 g ± 10%

8D 0

G

11

Ζ

04


Ρ

F

А

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Е

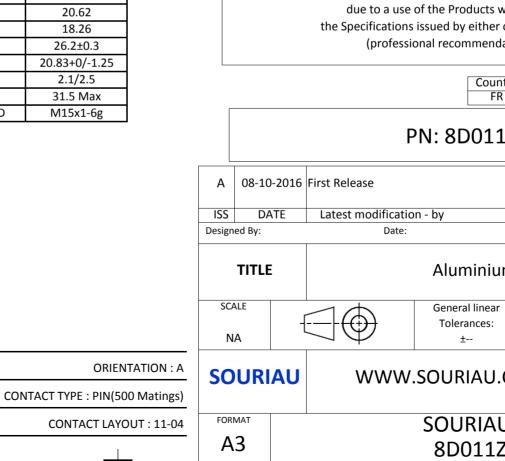

D

C							
					4		
LAYOUT SHOWN AS EXAMPLE							
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed PN: 8D011Z04PA							
rst Release Latest modification - by MOD N°							
Date:     CUSTOMER DRAWING       Aluminium Receptacle 8D series							
$] \bigoplus$	General linear Tolerances: ±		NPRDS / PROJ 859		1		
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission							
SOURIAU DRG N°         SHEET           8D011Z04PA-C         1/2							
C B A							

_	Ŧ	۵	п –	m	D	0
		Contact Layout				Panel Cuto
4	-x	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numt size no. cont 11 -4 4	X-axis (mm)         Y-axis (mm)           +.065 (1.65)         .065 (1.65)           +.065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)			N	ØT.
ω						Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D011
					ISS DATE Designed By: TITLE	Latest modification - by Date: Aluminiun
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT	SOURIAU
	Н	G	F	E	A3	8D011Z

