
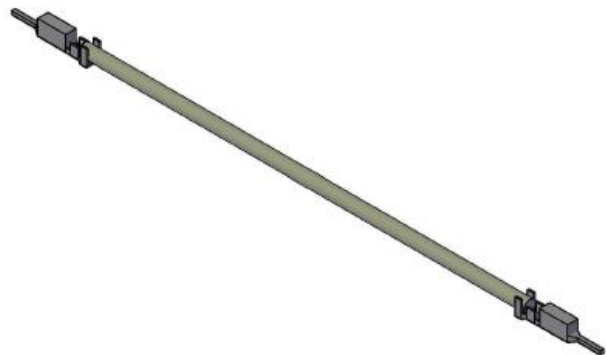


4		3		2		1	
ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EUR CHECK	Applicable Tooling		
1	SXAM-01T-P0.6	XA W-W CONNECTOR CONTACT			APPLICATOR		
2	UL1007, 22 AWG	BLACK			Applicable Housings		

NO. OF CIRCUITS	HOUSING PART NO. WITH PANEL LOCKS	HOUSING PART NO. WITHOUT PANEL LOCKS
2	XARR-02V	XARR-02VF
3	XARR-03V	XARR-03VF
4	XARR-04V	XARR-04VF
5	XARR-05V	XARR-05VF
6	XARR-06V	XARR-06VF
7	XARR-07V	-
8	XARR-08V	XARR-08VF
9	XARR-09V	XARR-09VF
10	XARR-10V	XARR-10VF
11	XARR-11V	-
12	XARR-12V	XARR-12VF
13	XARR-13V	-
14	XARR-14V	-
15	XARR-15V	-

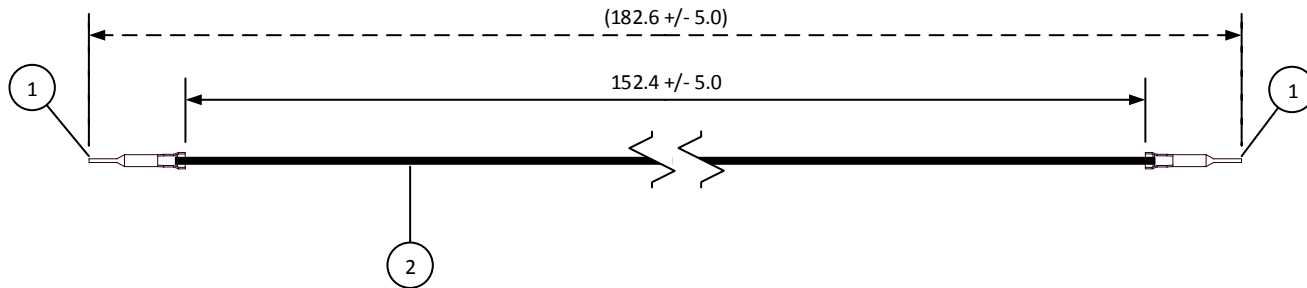

**JST**

SCALE	CUSTOMER NAME	CUSTOMER PART NO.
1:1		
DIMENSIONS	DESCRIPTION	
All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	2.5 mm Pitch XA W-W Series Standard Leads - 6" Inside Length DOUBLE-END LEADS, M-M	
DRAWN BY	ASSEMBLY PART NO.	
STEVEN PILKINGTON	ASXAMSXAM22K152	
CHECKED BY	DRAWING NO. & REVISION	REVISED
JUSTIN BAKER	GAM-074	3/9/2016

REV.	DESCRIPTION	DATE	BY
------	-------------	------	----