



Smart Technology. Delivered.

OC24594 Access Point Antenna



OC24594 LOW PROFILE DIPOLE ACCESS POINT ANTENNA

Today's work and lifestyles require us to communicate anytime, anywhere... whether on the move or sitting still. Bluetooth and 802.11 standards make wireless connections to computer networks and other devices possible, while at the same time enabling freedom of movement.

Laird's practical and rugged external wireless device antennas are designed to fit into the access points used in office, industrial, and home environments. The antenna features dual resonant flexible elements that have reduced ground dependence thereby desensitizing performance variation typically associated with antenna location on the access point.

FEATURES

- ½ wave dipole design for improved performance.
- Low profile white polycarbonate, UL94-V0, UV stable radome.
- IP54 Rated for harsh indoor environments.

MARKETS

- Bluetooth & IEEE 802.11a/b/g devices.
- Office LAN environments.
- Warehouse & Manufacturing.
- Retail & hospitality.

PARAMETER	SPECIFICATIONS	
Model	OC24594-FRTN	
Frequency Bands, MHz	2400-2500	4900-5925
Peak Gain, dBi (Avg)	1.0	2.8
Peak Gain, dBi (Max)	1.3	4.1
VSWR (Avg)	1.7:1	1.3:1
VSWR (Max)	2.0:1	2.0:1
Nominal Impedance	50Ω	
Polarization	Vertical	
Azimuth 3 dB Beamwidth	360°	
Elevation 3 dB Beamwidth	75°	54°
Max Power (Ambient 25°C)	10 Watts	
Antenna Dimensions (Dia x H)	75.9 mm x 19.8 mm (2.99 in. x 0.78 in.)	
Weight	35 g (0.08 lbs)	
Connector	Fixed RP TNC male	
Antenna Color	White	
Radome	Polycarbonate, UL94-V0, UV Stable	
Operating Temperature	-30°C to +70°C (-22°F to +158°F)	
Storage Temperature	-40°C to +85°C (-40°F to +185°F)	
Ingression Protection	IP54	
Material Substance Compliance	RoHS	

Americas: +1.847 839.6925
IAS-AmericasSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com


Asia:
IAS-AsiaSales@lairdtech.com

Middle East and Africa: +44.1628.858941
IAS-MEAUSales@lairdtech.com

www.lairdtech.com

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective by reason of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.



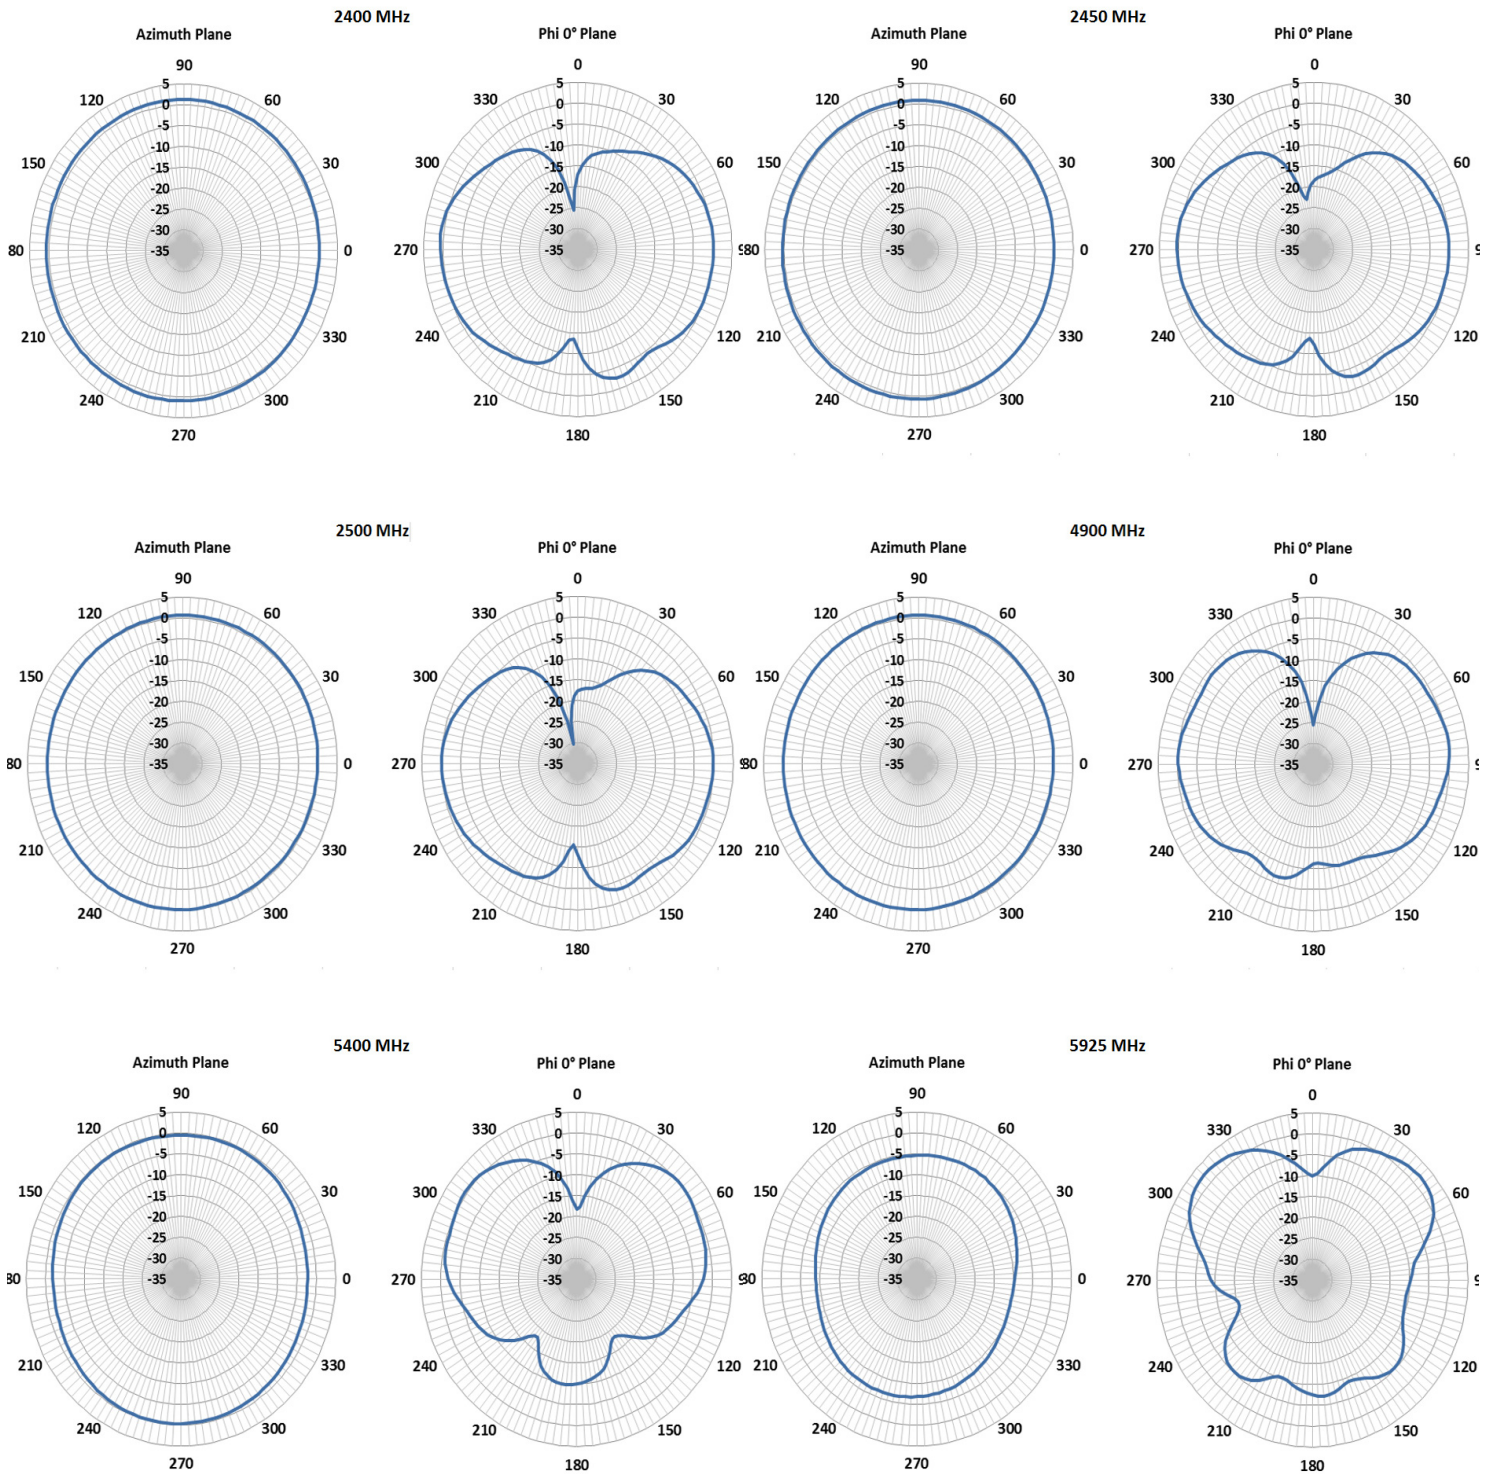

ANT-DS-OC24594 0417

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2017 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.