


RECOMMENDED P.C.B. LAYOUT





CIRCUIT: 2PDT



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	DIFF	DN
2-3,5-6	DPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC or 28VDC, 1A @250VAC
5. FIXED TERM. & MOVING CONTACT: Copper alloy w/Silver Plate full load.
7. INSULATION RESISTANCE: 1000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS min. @sea level.
9. OPERATING TEMP.: -30°C to 85°C

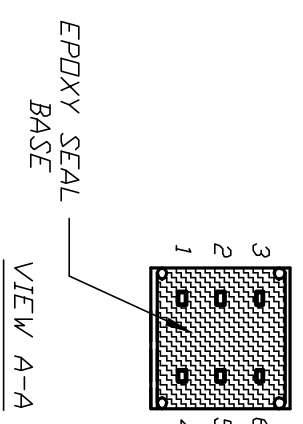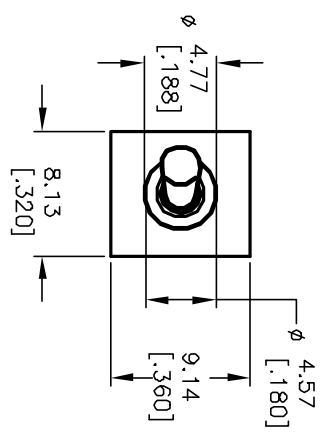

VIEW A-A

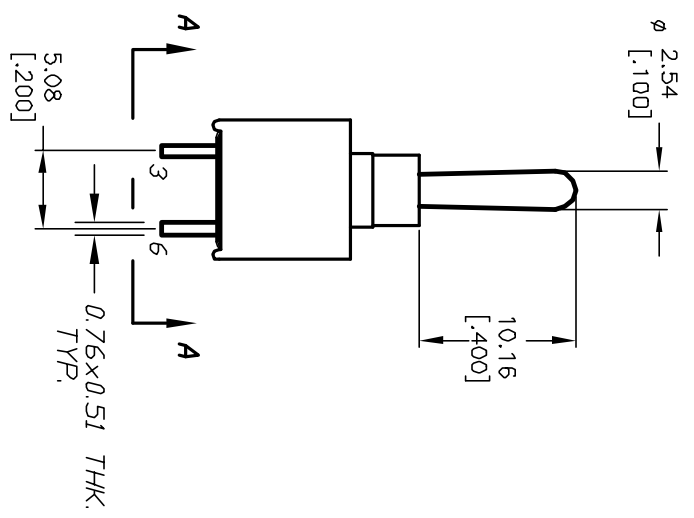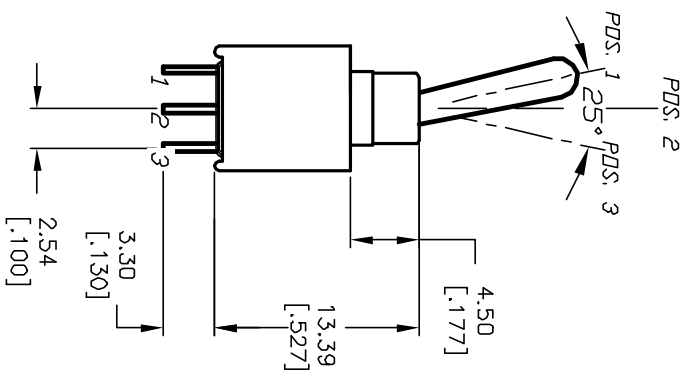

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	11590	RELEASED FOR PRODUCTION	8/1/01	CJB

TITLE	SCALE	DATE	DR	DWG	REV
200A WMDP-3 T1 A1 M2 Q E	2:1	8/1/01	CJB	T202301	A

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED