


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	B	REVISED PER ECR-08-003988	05MAR08	JWD JD

1. MAXIMUM INSERTION LOSS IS 0.2dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
2. MINIMUM RETURN LOSS: 55 dB
3. CONNECTOR END FACE TO MEET LC GEOMETRY REQUIREMENTS.
4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

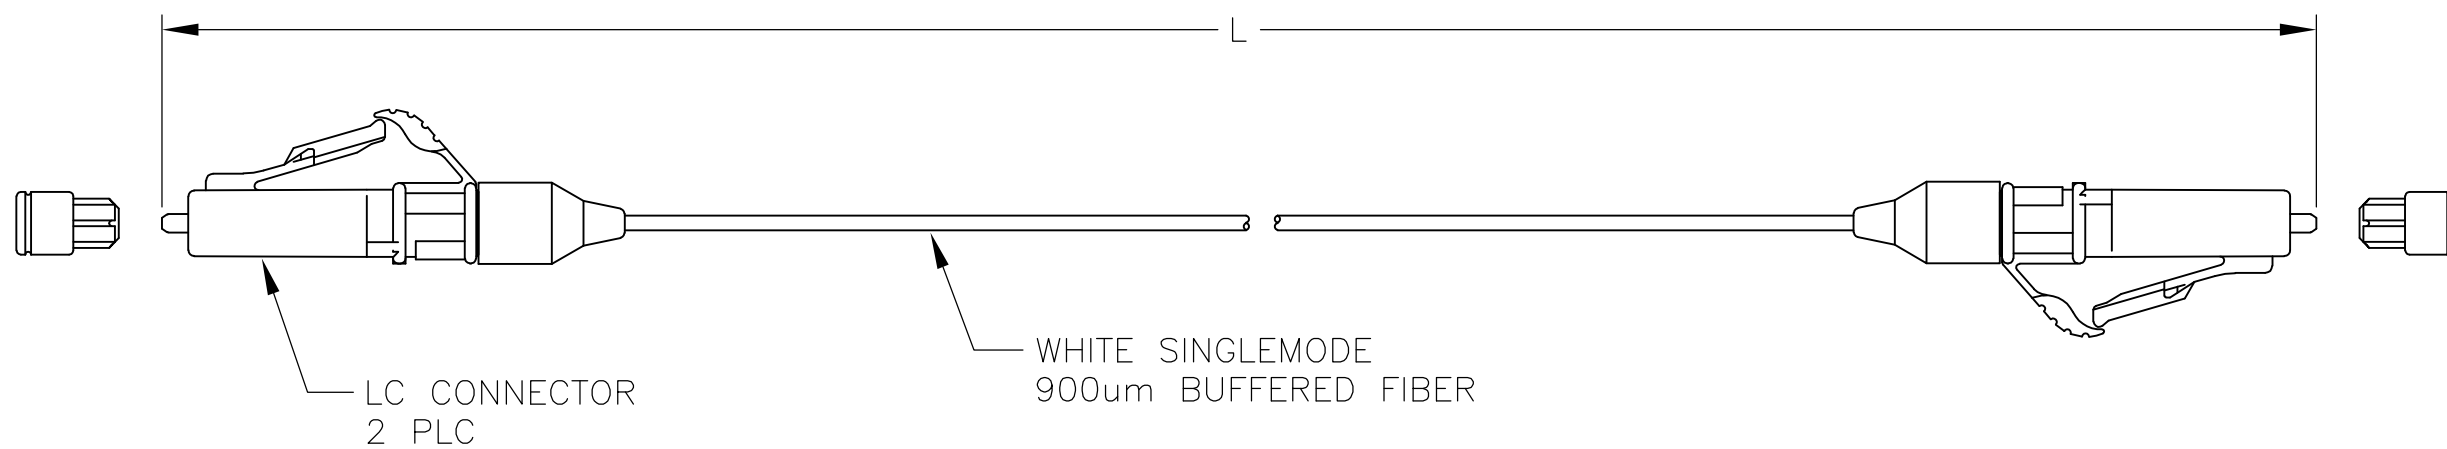

MAX IL (dB)	L METERS [INCHES]	PART NUMBER
0.21	10.00±0.15 [393.70±6.0]	1-6374518-0
0.20	5.00±0.08 [196.90±3.00]	6374518-5
0.20	4.00±0.08 [157.50±3.00]	6374518-4
0.20	3.00±0.05 [118.10±2.00]	6374518-3
0.20	2.00±0.05 [78.70±2.00]	6374518-2
0.20	1.00±0.05 [39.40±2.00]	6374518-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATHY HE 28SEP05	Tyco Electronics Corporation Harrisburg Pa, 17105-3608													
DIMENSIONS: METERS [INCHES]		CHK RICHARD ZHAO 28SEP05	NAME CABLE ASSY, FIBER OPTIC, 900 BUFFER, SM LC TO LC, OPTIMATE													
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 28SEP05	PRODUCT SPEC													
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	APPLICATION SPEC	RESTRICTED TO	
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL	FINISH	WEIGHT	SIZE A3	CAGE CODE 00779												
-	-	-	DRAWING NO C-6374518													
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1												