



DIMENSIONS:	
A	4.375" ±0.063
B	5.596" ±0.125
C	5.300" ±0.063
D	3.500" ±0.063
E	4.000" ±0.063
G	0.281" x 0.625" ±0.015

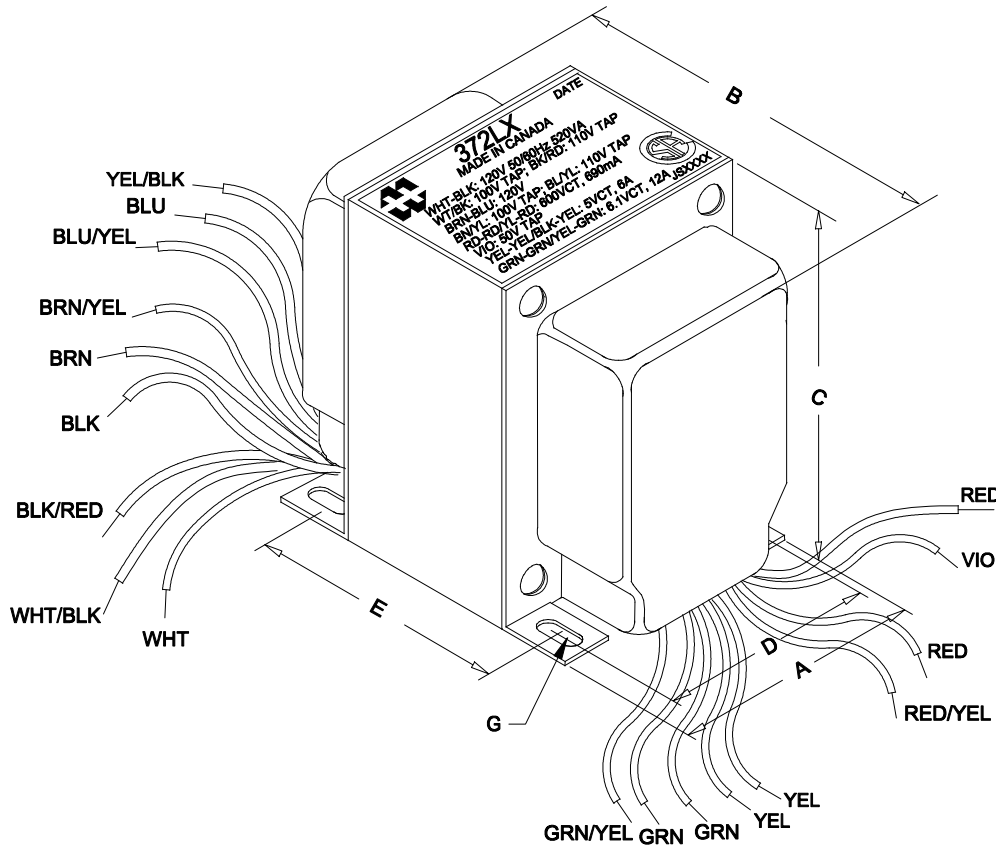

NOTE: ALL LEADS 8" OUT MIN.

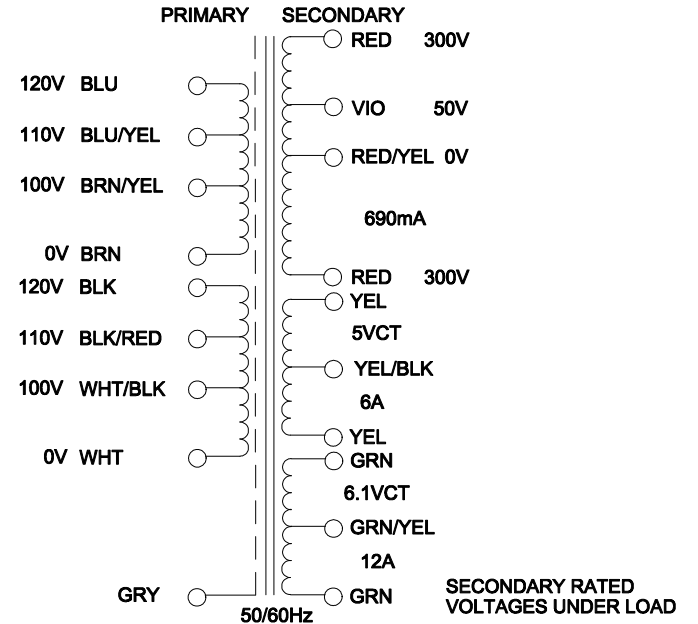

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I <sub>ex</sub>	@ 120V, 60Hz, WHT - BLK	761mA Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK	
	RED - RED =	615.7V ±2%
	RED - RED/YEL = RED/YEL - RED =	307.8V ±2%
	RED/YEL - VIO =	51.13V ±2%
	YEL - YEL =	5.217V ±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.609V ±2%
	GRN - GRN =	6.261V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.130V ±2%
DCR	@ 20°C, WHT - BLK =	0.516 Ω ±20%
	@ 20°C, BRN - BLU =	0.559 Ω ±20%
	@ 20°C, RED - RED =	10.06 Ω ±20%
	@ 20°C, YEL - YEL =	0.014 Ω ±20%
	@ 20°C, GRN - GRN =	0.009 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181
0	RELEASED.	01/20/10	MANUFACTURING™				FAX # (519) 886-9540
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 372LX	
			DATE: 01/20/10	APP'D. BY:			
				DIMENSIONS: IN(X) MM( )			