

MODEL NUMBER
PWD-5526-02-NNN-79


REV.
B

NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: 6.0 to 18.0 GHz
 - 1.2 INSERTION LOSS: 0.8dB MAX.
 - 1.3 ISOLATION: 18dB MIN.
 - 1.4 VSWR (MAX): 1.60:1
 - 1.5 OUTPUT UNBALANCE:
 - 1.5.1 AMPLITUDE: 0.3dB MAX.
 - 1.5.2 PHASE: 10° MAX.
 - 1.6 MAXIMUM INPUT POWER: 3 WATTS
AT +25°C W/OUTPUT LOAD VSWR < 2.0:1
 - 1.7 OPERATING TEMP RANGE:
-65°C to +125°C

- 2.0 FINISH:
- 2.1 GREY PER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400
 - 2.2 MARKING: MARK UNIT AS SHOWN.
(REF.: SLK-08090-82-01)

3.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

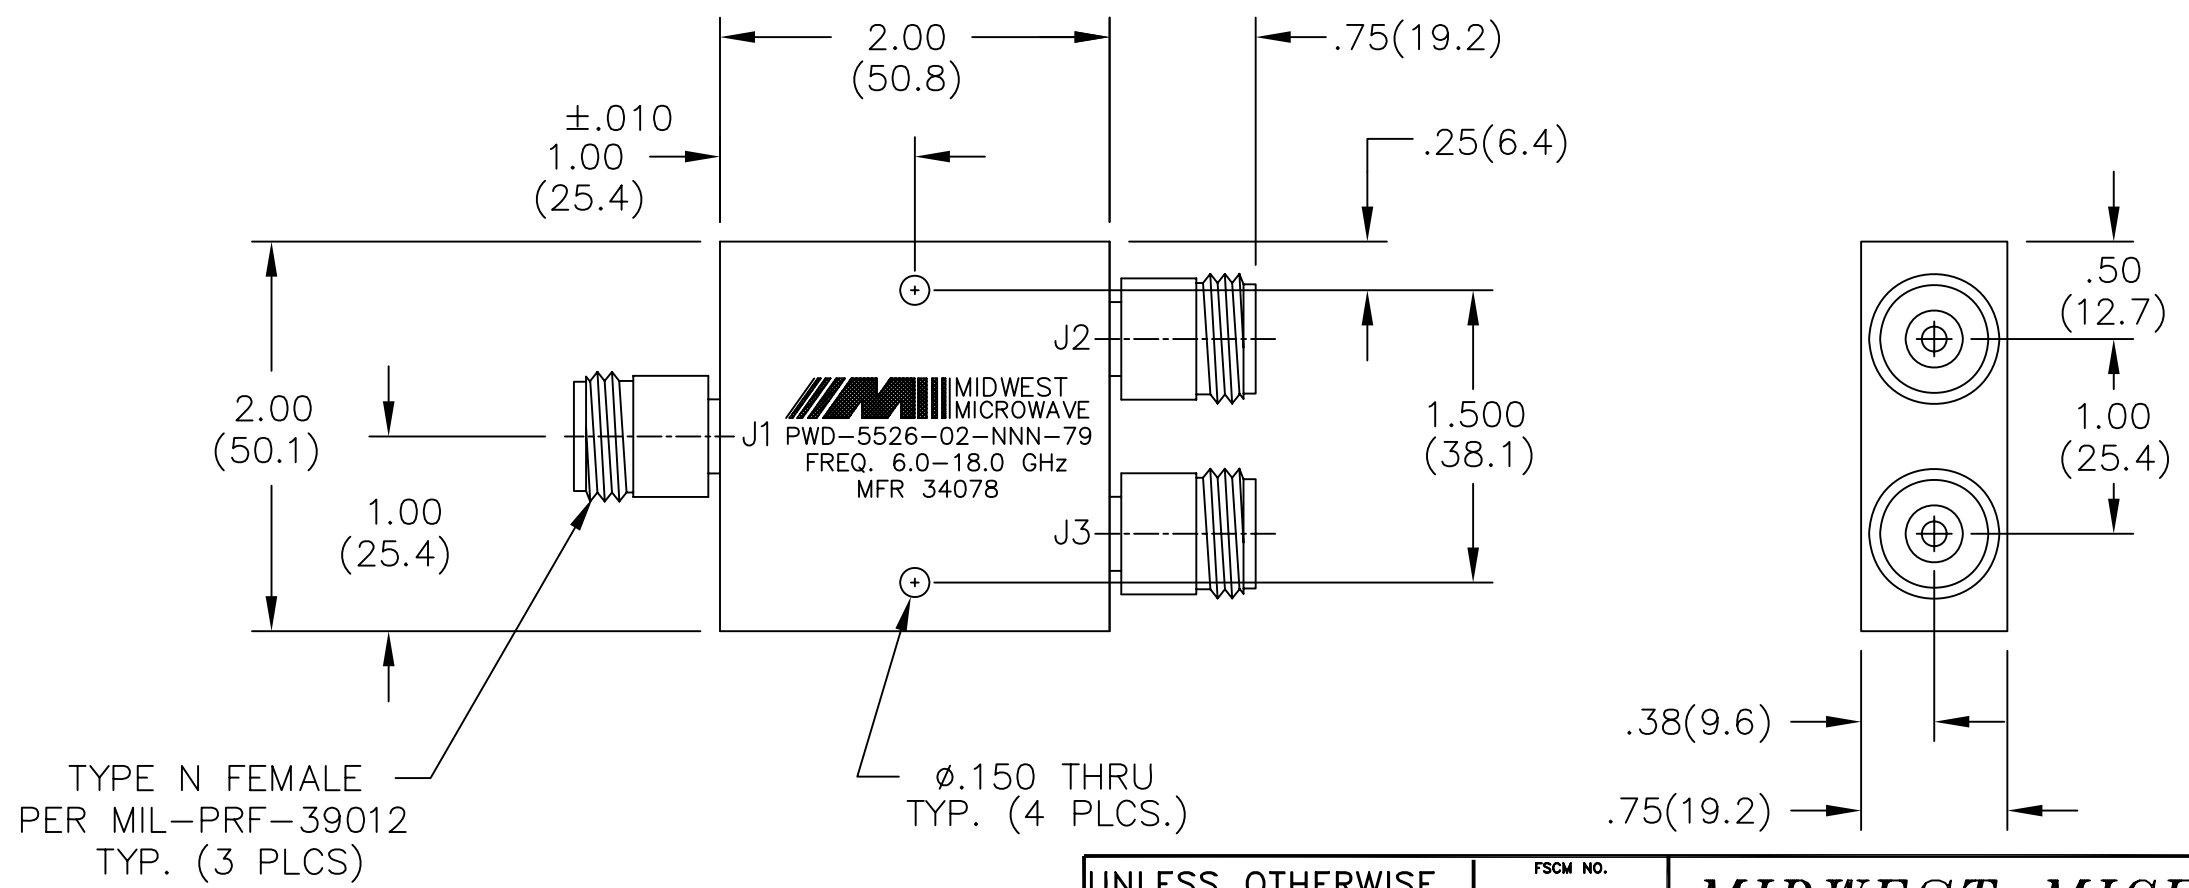

REV.	DESCRIPTION	DATE
-	RELEASED	3/12/99
A	ECN 17024	1/23/04
B	ECN 19596	

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO. 34078		MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE POWER DIVIDER	
2 PLACE DECIMALS ±.02					
FRACTIONS ±1/64		DRAWN/DATE L.BROWN 6/15/98		ENG./DATE P.GOODMAN 3/12/99	
PARALLELITY: T.I.R. _____		CHECKED/DATE		APPROVED/DATE	
FLATNESS: T.I.R. _____		DRAWING NUMBER PWD-5526-02-NNN-79			
CONCENTRICITY: T.I.R. _____		SCALE: 1=1 SHEET 1 of 1			
ANGLES AND PERPENDICULARITY: ±1°					