




## New & Improved - Protects Vulnerable Welding Hoses From Catastrophic Failure

Techflex WELD-WRAP (WWH) is braided from silica yarns with a high temperature coating and as well as hook and loop closure. Commonly used for protecting welding hoses from molten splatter and abrasion from moving and dragging. This product will withstand continuous exposure to temperatures of 400°F, and intermittent exposure to temperatures of 750°F.

The heavy duty hook and loop closure ensures a tight seal, and allows Weld-Wrap to be installed easily over existing assemblies. Weld-Wrap also provides a high level of abrasion and penetration protection to increase the useful life of any hoses exposed to rough or abrasive surfaces.

- **Resists Damage from UV, Gasoline, and Engine Chemicals**
- **Weld Splatter, Hot Slag, and Welding Spark Protection**

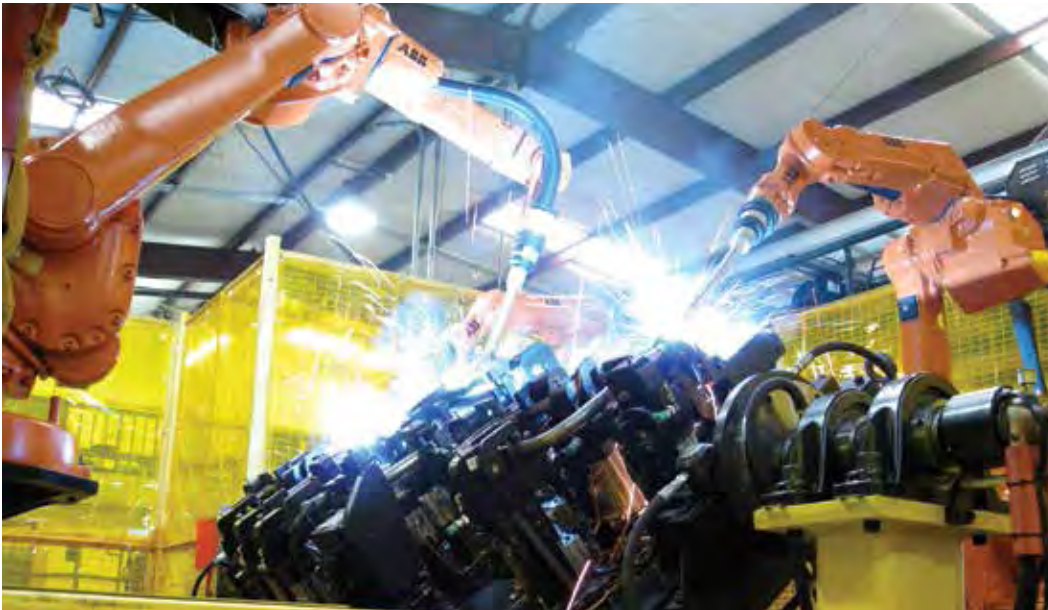

WeldWrap bundles and protects hoses on welding robots and static welding stations.

Nominal Size	Part #	Wall Thickness	Velcro Width	Standard Spool Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1"	WWH1.00SV	.051"	5/8"	50'	25'	Silver (SV)	13.15
1 1/2"	WWH1.50SV	.051"	5/8"	50'	25'	Silver (SV)	16.94
2"	WWH2.00SV	.051"	5/8"	50'	25'	Silver (SV)	20.81
3"	WWH3.00SV	.051"	5/8"	50'	25'	Silver (SV)	28.53