


# HC-D 7-SML-26/M1PG11

Order No.: 1773284

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1773284>

HEAVYCON box mounting base D7, with single locking latch, height 26 mm, with screw connection 1x PG11, with open bottom, zinc

## Commercial data

|                          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 134389 |
| sales group              | D011   |
| Pack                     | 10 pcs.  |
| Customs tariff           | 85389099   |
| Catalog page information | Page 509 (PC-2009)   |

## Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### General data

|        |   |
|--------|---|
| Note   | For contact inserts HC-D7, D8, A3, A4, B5, HS2-D7 |
| Design | D7  |
| Height | 25.5 mm   |

|                                 |                                |
|---------------------------------|--------------------------------|
| Width                           | 40.5 mm                        |
| Length                          | 38 mm                          |
| Housing type                    | Box mounting bases             |
| Locking type                    | With single locking latch      |
| Type of the screw connection    | 1x Pg11                        |
| Pg screw connection             | With                           |
| Wrench size, union nut          | 18 mm                          |
| External cable diameter         | 7.5 mm ... 12.5 mm             |
| Degree of protection            | IP54 / IP65 with sealing screw |
| Ambient temperature (operation) | -40 °C ... 125 °C              |
| Housing material                | Zinc die-cast                  |
| Housing surface material        | Powder-coated, gray            |
| Seal material                   | NBR                            |
| Cable gland material            | Nickel-plated brass            |
| Cable seal material             | NBR                            |
| Material lock                   | Steel, galvanized              |

#### Certificates / Approvals



Certification GOST


#### Accessories

| Item            | Designation    | Description                        |
|-----------------|----------------|------------------------------------|
| <b>Assembly</b> |                |                                    |
| 1686229         | HC-D 7-DS-IP65 | Sealing screw, for IP65 protection |

**Diagrams/Drawings**

Dimensioned drawing

---

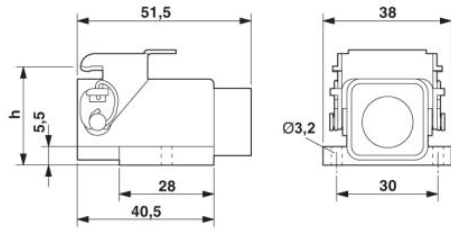

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;