

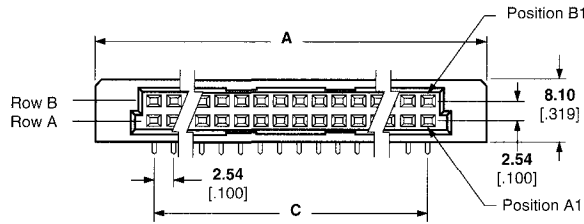
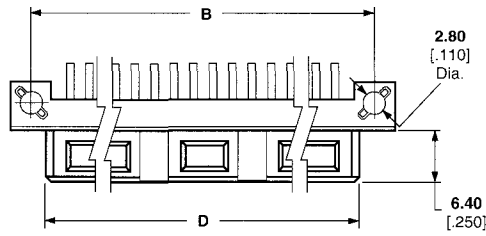


Type Q Right Angle Receptacle Assemblies with Solder Posts and MFBL Contacts

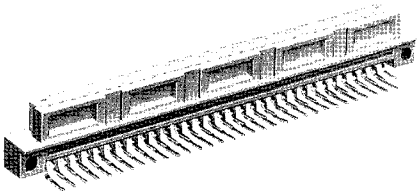

Material

Housing — Glass filled polymer
Contacts — Copper alloy

Related Product Data

- DIN Performance Levels** — Page 6
- Performance Specifications** — Page 8
- Mateable Connectors** — Pages 14, 50
- PC Board Hole Layout** — Page 58
- Accessories** — Pages 68, 69
- Technical Documents** — Page 74:
DIN Specification 41612
IEC Specification 60603-2
Application Specification 114-9014
Instruction Sheet 408-6784

Standard Size

Number of Positions	Rows Loaded	Dimensions				DIN Level	Part Number
		A	B	C	D		
64	A,B	93.80 3.693	88.90 3.500	78.74 3.100	84.90 3.343	III	174253-2

Note: Locations of MFBL contacts; B1, B32.

Half Size

Number of Positions	Rows Loaded	Dimensions				DIN Level	Part Number
		A	B	C	D		
32	A,B	53.10 2.091	48.24 1.899	38.10 1.500	44.20 1.740	III	174253-1

Note: Locations of MFBL contacts; B1, B16.

Type Q Assemblies