

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [62202-4300](#)
Status: **Active**
Description: Impact Daughter Card Extraction Tool

Documents:
[RoHS Certificate of Compliance \(PDF\)](#)


General

Product Family	Application Tooling
Series	T3002
Comments	See Tooling Specification (PDF) Above
Function	Crimp
Geographic Area	Global
Level of Automation	Manual
More Detailed Tech Information	applicationtooling@molex.com
Product Name	Impact™
Survey	www.molex.com//review/apptool_survey.html
Tool Type	Handtool
UPC	884982113855

Material Info

Reference - Drawing Numbers

Application Tooling Documents ATS-622024300, TM-622018799

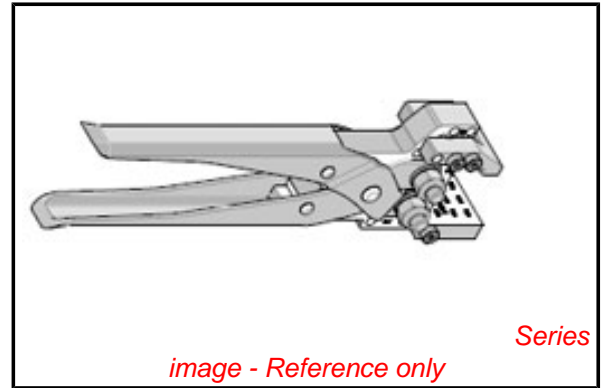

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
 Not Reviewed
Low-Halogen Status
 Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[T3002Series](#)

Use With

Impact™ Daughtercard Signal Module, Standard and Orthogonal Configurations for: . 2 Pair [76460](#) . 3 Pair [76170](#) , [76860](#) . 4 Pair [76160](#) , [76850](#) . 5 Pair [76060](#) , [76990](#) . 6 pair [76150](#) , [76290](#)

Application Tooling | FAQ

Description	Product #
-------------	-----------

Impact™ 100 Ohm 3 Pair Right Angle Daughtercard Receptacle, 1.90 by 1.35mm Pitch, Right Guided, 16 Columns, 144 Circuits, Plated Through Hole Dimension 0.46mm, Lead-Free	0761705016
Impact™ 100 Ohm 6 Pair Right Angle Daughtercard	0761503024

Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 14 Columns,
252 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761605016
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761605038
4 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Right Guided, 8
Columns, 96 Circuits,
Plated Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761603038
4 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Left Guided, 8
Columns, 96 Circuits,
Plated Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761601038
4 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 8
Columns, 96 Circuits,
Plated Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761501016
6 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 16
Columns, 288
Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761705026
3 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
144 Circuits, Plated

Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761605026
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761603026
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 16 Columns,
192 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 0762905022
Ohm 6 Pair Right
Angle Orthogonal
Daughtercard, Right
Guided, 12 Columns,
216 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761601026
4 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 16
Columns, 192
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761603010
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 10 Columns,
120 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761505026
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
288 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 0762903022
Ohm 6 Pair Right

Angle Orthogonal
Daughtercard, Left
Guided, 12 Columns,
216 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761605020
4 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 10 Columns,
120 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 0768505038
Ohm 4 Pair Right
Angle Orthogonal
Daughtercard, Right
Guide, 8 Columns,
96 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 0768601036
Ohm 3 Pair Right
Angle Orthogonal
Daughtercard, Right
Guide, 6 Columns,
54 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 85 Ohm 1705301020
Plus 3 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Unguided, 10
Columns, 90 Circuits,
Plated Through Hole
Dimension 0.39mm,
Lead Free
Impact™ 85 Ohm 1705301038
Plus 3 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Unguided, 8
Columns, 72 Circuits,
Plated Through Hole
Dimension 0.39mm,
Lead Free
Impact™ 85 Ohm 1705303020
Plus 3 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Left Guide, 10
Columns, 90 Circuits,
Plated Through Hole
Dimension 0.39mm,
Lead Free
Impact™ 85 Ohm 1705303026
Plus 3 Pair Right
Angle Daughtercard,

1.90 by 1.35mm
Pitch, Left Guide,
16 Columns, 144
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead Free
Impact™ 85 Ohm 1705303038
Plus 3 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Left Guide, 8
Columns, 72 Circuits,
Plated Through Hole
Dimension 0.39mm,
Lead Free
Impact™ 85 Ohm 1705303126
Plus 3 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Left Guide,
16 Columns, 144
Circuits, Plated
Through Hole
Dimension 0.39mm,
Keying Orientation A,
Lead Free
Impact™ 85 Ohm 1705305020
Plus 3 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Right Guide,
10 Columns, 90
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead Free
Impact™ 85 Ohm 1705305026
Plus 3 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Right Guide,
16 Columns, 144
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead Free
Impact™ 85 Ohm 1704801020
Plus 5 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Unguided,
10 Columns, 150
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead Free
Impact™ 85 Ohm 1704801022
Plus 5 Pair Right
Angle Daughtercard,
1.90 by 1.35mm
Pitch, Unguided,
12 Columns, 180
Circuits, Plated
Through Hole

Dimension 0.39mm,
Lead Free
Impact™ 100 Ohm 0761501010
6 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 10
Columns, 180
Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761501014
6 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 14
Columns, 252
Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761501020
6 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 10
Columns, 180
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761501024
6 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 14
Columns, 252
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761501026
6 Pair Right Angle
Daughtercard
Receptacle, 1.90
by 1.35mm Pitch,
Unguided, 16
Columns, 288
Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761503010
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 10 Columns,
180 Circuits, Plated
Through Hole

Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761503014
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 14 Columns,
252 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761503016
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 16 Columns,
288 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free
Impact™ 100 Ohm 0761503020
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 10 Columns,
180 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761503026
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 16 Columns,
288 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free
Impact™ 100 Ohm 0761503120
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 10 Columns,
180 Circuits, Plated
Through Hole
Dimension 0.39mm,
Polarization Key A,
Lead-Free
Impact™ 100 Ohm 0761503626
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 16 Columns,
288 Circuits, Plated
Through Hole
Dimension 0.39mm,
Polarization Key F,
Lead-Free

Impact™ 100 Ohm 0761505010
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 10 Columns,
180 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free

Impact™ 100 Ohm 0761505014
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 14 Columns,
252 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free

Impact™ 100 Ohm 0761505016
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
288 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free

Impact™ 100 Ohm 0761505020
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 10 Columns,
180 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

Impact™ 100 Ohm 0761505024
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 14 Columns,
252 Circuits, Plated
Through Hole
Dimension 0.39mm,
Lead-Free

Impact™ 100 Ohm 0761505110
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 10 Columns,
180 Circuits, Plated
Through Hole
Dimension 0.46mm,
Polarization Key A,
Lead-Free

Impact™ 100 Ohm 0761505120
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by

1.35mm Pitch, Right
Guided, 10 Columns,
180 Circuits, Plated
Through Hole
Dimension 0.39mm,
Polarization Key A,
Lead-Free
Impact™ 100 Ohm 0761505126
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
288 Circuits, Plated
Through Hole
Dimension 0.39mm,
Polarization Key A,
Lead-Free
Impact™ 100 Ohm 0761505326
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Right
Guided, 16 Columns,
288 Circuits, Plated
Through Hole
Dimension 0.39mm,
Polarization Key C,
Lead-Free
Impact™ 100 Ohm 0761503116
6 Pair Right Angle
Daughtercard
Receptacle, 1.90 by
1.35mm Pitch, Left
Guided, 16 Columns,
288 Circuits, Plated
Through Hole
Dimension 0.46mm,
Lead-Free, Keying
Orientation A

This document was generated on 04/12/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION