ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00406	Connector, stereo plug, 2.5xL19.6 mm, brass, nickel plated, white, molding style	1	
2	30-00180	Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC, white	1	
3	24-00028	Overmold, PVC	1	white

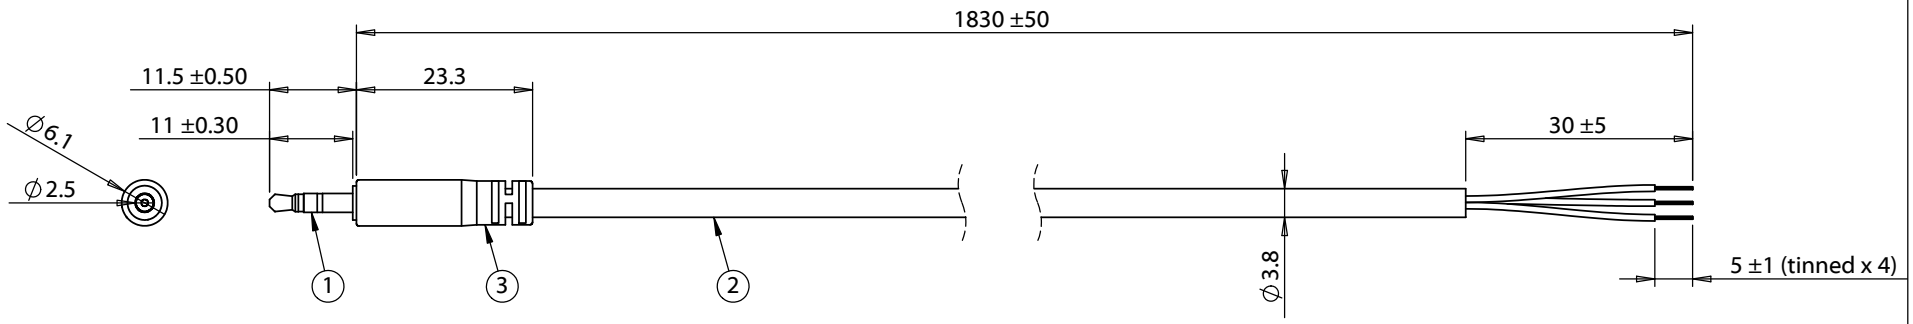



Wiring Diagram	
50-00406	wire color
A	red
B	white
C	green

Revision:	Date:	Description:
A1	10/5/2010	Updated wiring diagram
A2	9/6/2011	Updated specification
A3	3/28/2012	Updated wire part number
A4	10/8/2014	Updated connector
A5	10/21/2016	Corrected overmold dimensions

Prepared: GL 2016.10.21 11:51:51 -07'00'

Verified: PS Digitally signed by PS Date: 2016.10.21 14:31:21 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 2.5 mm 50-00406 slim stereo plug to 5 mm tinned, 28 AWG, 30-00180, shielded, white

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 10-00333

Scale: 1:1

Sheet 1 of 1

5 4 3 2 1