

- ◆ **Platinum Temperature Sensor**
- ◆ **Conformal to DIN EN 60751**
- ◆ **Global interchangeability**
- ◆ **Wide temperature range**
- ◆ **Fast response time**
- ◆ **Special Class B (F0.3) tolerance for -196°C measurements**
- ◆ **Small outline dimensions**
- ◆ **Blister box packing**

PTFC102BC1G0

Platinum Temperature Sensor

Product Description

This sensor is a resistance temperature detector (RTD) using a platinum resistor as sensing element. This platinum resistor consists of a structured platinum film on a ceramic substrate, passivated by glass coating. The connection wires are protected with glass on the welding area.

The connection wires are gold coated nickel wire.

The characteristic curve of this Platinum RTD complies with DIN EN 60751. Within the extended temperature range between -200 °C and -50 °C the characteristic curve of this Platinum RTD can be calculated using the same mathematical expression as between -50 °C and 0 °C.

To avoid hysteresis, the element is pre aged in liquid nitrogen. The element is designed, to perform measurements at -196°C (liquid nitrogen).

The usage of Platinum as resistive material guarantees high long term stability.

Due to small outline and low mass this RTD has a low time constant; therefore it is a suitable solution for fast and precise feedback control systems.

Sensors are packed as bulk goods in blister box.

Features

- ◆ R_0 : 1000 Ω
- ◆ TCR 3850ppm/K
- ◆ Application temperature -200°C...200°C
- ◆ resistance tolerance $\pm 0.12\%$
- ◆ Size 2 x 2.3 x 1.1 mm³ (width/length/height)
- ◆ Gold coated nickel wire, 10 mm length, 0.25 mm diameter

Applications

- ◆ Specific temperature feedback control at -196°C (liquid N)
- ◆ Medical
- ◆ Industrial applications

PTFC102BC1G0

Platinum Temperature Sensor

Sensor properties

Parameter	Symbol	Condition	Min	Typical	Max	Unit
Nominal Resistance at 0 °C	R ₀	Class B (F0.3)	998.80	1000.0	1001.20	Ω
Nominal Resistance at -196 °C	R ₋₁₉₆		196.90	202.50	208.10	Ω
Temperature Tolerance at -196 °C	±TT		-1.3	0	+1.3	K
Temperature Coefficient of Resistance	TCR	0 °C, 100 °C		3850		ppm/°C
Temperature Range		Class B (F0.3)	-200		200	°C
Selfheating Coefficient in air, flow: 1 m/s				0.5		°C/mW
Response Time Water Flow: 0.4 m/s	τ _{W,0.9}			0.2		s
Response Time Air Flow: 1 m/s	τ _{A,0.9}			10		s
Measuring Current		Class B (F0.3)			0.4	mA
Lead wire Au-coated Ni-wire		Diameter length		0.25 10		mm mm
Pre aging conditions			-200		150	°C

Calculation Formulas

The calculation formulas of this Pt-RTD are defined in DIN EN 60751 as following:

$$\text{For } T \geq 0 \text{ °C: } R_{(T)} = R_{(0)} \cdot (1 + a \cdot T + b \cdot T^2)$$

$$\text{For } T < 0 \text{ °C: } R_{(T)} = R_{(0)} \cdot [1 + a \cdot T + b \cdot T^2 + c \cdot (T - 100 \text{ °C}) \cdot T^3]$$

$$\text{Polynomial coefficients: } a = 3.9083\text{E-}03 \quad b = -5.775\text{E-}07 \quad c = -4.183\text{E-}12$$

$$\text{Tolerances: class F0.3 (B): } \pm (0.3 + 0.005 \cdot |T/\text{°C}|) \text{ °C} \quad (-200 \dots +200 \text{ °C})$$

PTFC102BC1G0

Platinum Temperature Sensor

Mechanical Dimensions

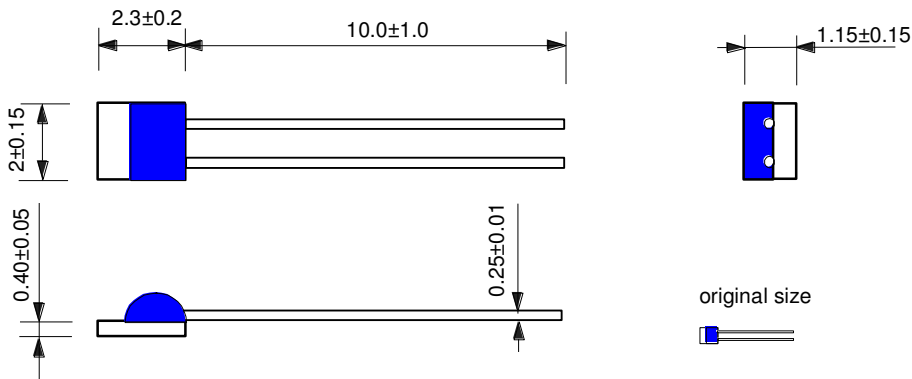


Figure 1: Mechanical dimensions of Platinum Temperature Sensor

Ordering Information

Description	Part Number
PTFC102BC1G0:PT1000,2.0X2.3,B	NB-PTCO-295

Packing and Minimum Order Quantity

Packing	PCS per Packing Unit	MOQ
Transparent Blister Reel 80mm x 250mm x 6mm	200	200

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
1711 139th Lane NW
Andover, MN 55304
Tel: +1 763 689 4870
Fax: +1 763 689 5033

customercare.ando@te.com

EUROPE

TE Connectivity Sensors Germany GmbH
Hauert 13
44227 Dortmund
Germany
Tel : +49 231 9740-0
Fax : +49 231 9740-20

customercare.dtm@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 368 Wulian 1st Road
Gongxing Town
Shuangliu, Chengdu
Sichuan, 610200
China
Tel: +86 (0) 28 8573 9088
Fax: +86 (0) 28 8573 9070

customercare.chdu@te.com

te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, MEAS, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.

[Model Rev]
[Internal ECN]