
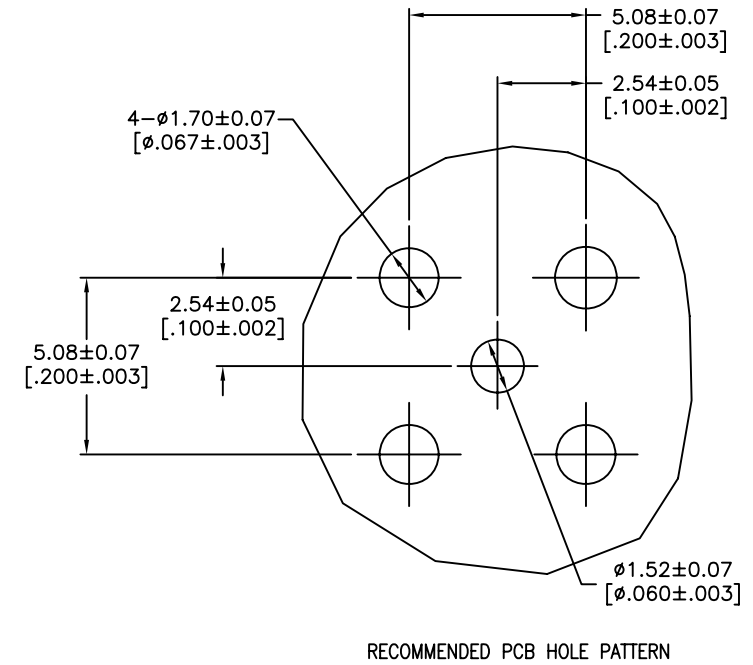


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/19/10	XXXXXX	INITIAL RELEASE

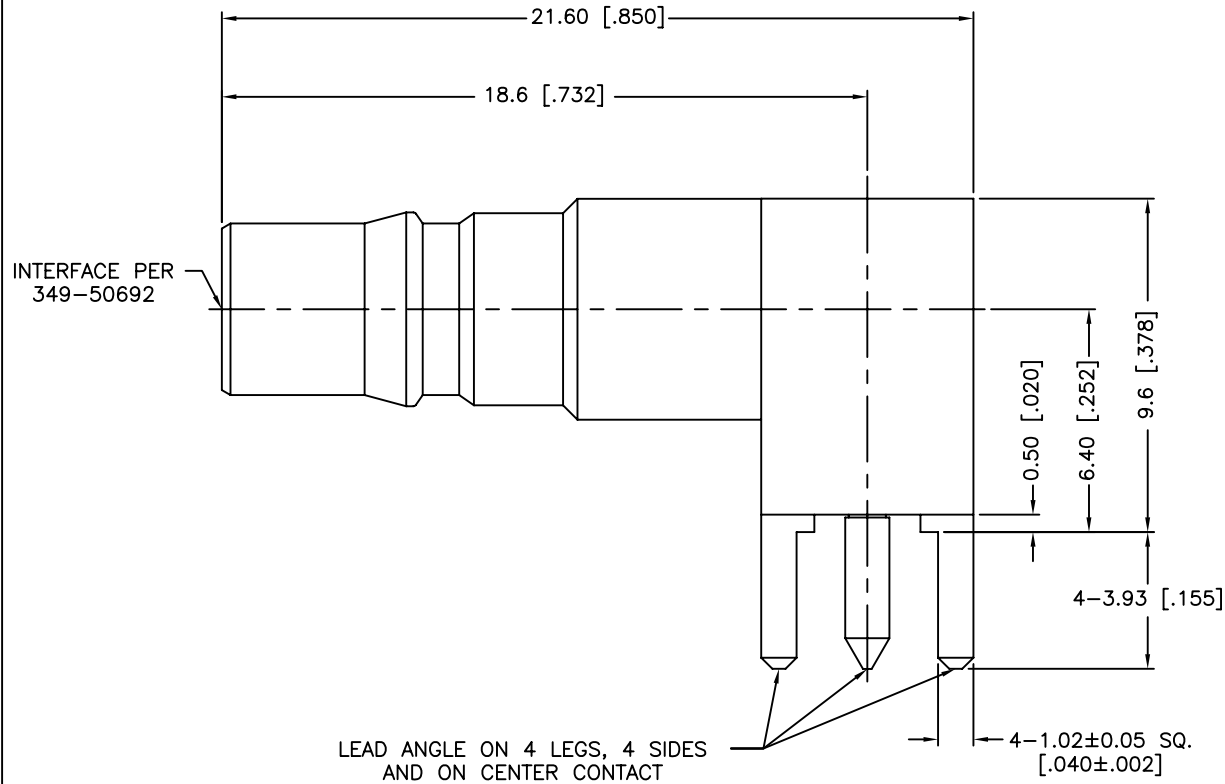

1. DURABILITY: 100 CYCLES MIN.
2. TEMPERATURE RANGE: -40°C TO +80°C
3. FREQUENCY RANGE: DC - 6.0 GHz

DESCRIPTION	MATERIAL	FINISH	QTY
5 COVER PLATE	BRASS	NEXCOTE	1
4 INSULATOR-REAR	PTFE	NATURAL	1
3 BODY	BRASS	GOLD	1
2 CONTACT PIN	BERYLLIUM COPPER	GOLD	1
1 INSULATOR	PTFE	NATURAL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.40mm  
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 = ± 0.007"  
.315 - 1.180 = ± 0.015"  
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	11/19/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/134100.DWG

**Amphenol Connex**

PART DESCRIPTION  
**QMA JACK, RIGHT ANGLE, PCB MOUNT**

PART NO.  
**134100**

DWG. NO. 134100.DWG    REV. NC    SIZE A    SCALE NA